

DEWALT®

POWER TOOLS CATALOGUE 2019



www.DEWALT.com

GUARANTEED TOUGH.®

CONTENTS

54V XR	Page 5	METALWORKING & CONCRETE	Page 97
18V XR	Page 21	Grinders, Polishers, Tile Saws, Chop Saws	
12V XR	Page 53	DRILLING AND FASTENING	Page 101
LASERS & LASER DISTANCE MEASURES	Page 61	Drills & Wrenches	
HAMMERS	Page 69	DUST MANAGEMENT	Page 105
MITRE SAWS & MACHINERY	Page 77	Extractors & Accessories	
WOODWORKING	Page 87	STORAGE	Page 107
Routers, Planers, Sanders, Heatguns, Plunge Saws, Circular Saws, Jigsaws, Reciprocating Saws		ToughSystem™, TSTAK™ & Soft Storage	
		SERVICES	Page 123

KEY

<p>CHISELLING MODE Single mode for chiselling only</p>	<p>TWO MODE For rotary and hammer drilling</p>	<p>THREE MODE For rotary, hammer drilling and chiselling</p>	<p>IMPACT MECHANISM Uses rotary impacts to generate extremely high torque</p>	<p>TWO AND THREE SPEED SELECTOR Many DEWALT tools are available with multiple speeds to offer good control in a variety of applications</p>	<p>CLUTCH Clutch protects the operator against kickback and the tool against overload should the accessory jam</p>	<p>KEYLESS CHUCK</p>	<p>QUICK CHANGE CHUCK Ideal solution to change easily between SDS and 3 jaw chuck systems</p>	<p>FORWARD AND REVERSE Forward and reverse action for screwdriving applications</p>	<p>1 BATTERY Tool comes complete with 1 battery as standard</p>	<p>2 BATTERIES Tool comes complete with 2 batteries as standard</p>	<p>3 BATTERIES Tool comes complete with 3 batteries as standard</p>	<p>KITBOX Supplied with heavy duty carrying case</p>	<p>AVC VIBRATION CONTROL Built-in mechanism to reduce the vibration at the hand</p>	<p>AIRLOCK Airlock compatible dust extractor port. Allows easy and secure connection to Airlock dust management systems for a cleaner and safer jobsite</p>	<p>NO GAS</p>	<p>BLUETOOTH COMPATIBILITY</p>	<p>TSTAK™ Stackable, highly durable, storage solution</p>	<p>TOUGHSYSTEM™</p>	<p>CROSS CUT POSITIONING SYSTEM Projection of LED light along both sides of the blade to form a shadow on the work piece. This provides adjustment free cut line indication for better accuracy and visibility</p>	<p>54V XR FLEXVOLT Batteries come in a variety of different voltages and capacities</p>	<p>18V XR BATTERIES Offer capacities for all needs (2Ah to 5Ah)</p>	<p>BRUSHLESS TECHNOLOGY Helps to increase lifetime of both tool and battery</p>	<p>12V XR Batteries come with a 2Ah capacity as standard</p>
														<p>CHIPPING</p>									



DeWALT is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provides a fully integrated system solution for various applications.

DeWALT tools offer unparalleled performance, with durable construction for a professional finish. Rely on DeWALT to get the job done, with a 3 year guarantee on most tools.



Taking cordless drilling to the next level, the newest DeWALT 54V XR FLEXVOLT range provides true corded performance without the restrictions of the cord. With Brushless motors and Perform & Protect low vibration levels, these tools set the new standard on the jobsite.

With over 100 tools in the range the 18V XR Lithium-Ion battery platform is the biggest and fastest growing in our range. All 18V XR products are compatible with XR FLEXVOLT batteries, giving you longer runtime and even greater flexibility meaning the CORDLESS JOBSITE has arrived.



TAKE YOUR WORKSHOP ANYWHERE.



GUARANTEED TOUGH.®

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DeWALT tools earn the right to be labelled Guaranteed Tough® – in the hands of real users.

PERFORM & PROTECT



Tools carrying the Perform and Protect shield are designed to exceed the highest demands of the jobsite whilst meeting strict criteria in key health and safety issues:

- CONTROL – unique and innovative torque features help to protect the end user from accidental jams
- VIBRATION – integrated vibration dampening systems allow users to operate tools safer for longer
- DUST – advanced dust control guards against dust inhalation, helping to create a cleaner, safer working environment

XR FLEX VOLT



54V XR POWER WHERE YOU NEED IT

Take the power of mains wherever you go with the XR FLEXVOLT range. The 54V batteries offer immense, consistent power to make light work of the toughest applications.

www.DEWALT.co.uk

54V XR FLEXVOLT 190MM CIRCULAR SAW

DCS575T2

Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	67mm
Max. Depth of Cut (45°)	49mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²



DCS575N - BARE UNIT

54V XR FLEXVOLT 190MM TRACKED CIRCULAR SAW

DCS576T2

Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	61mm
Max. Depth of Cut (90°) with Rail	57mm
Max. Depth of Cut (45°)	43mm
Max. Depth of Cut (45°) with Rail	39mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²
Track Compatible	Yes



DCS576N - BARE UNIT

54V XR FLEXVOLT 190MM HIGH TORQUE CIRCULAR SAW

DCS577T2

Blade Diameter	190 x Diamond Bore
No Load Speed	5800rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	50mm
Bevel Capacity	53°
Hand/Arm Vibration	2.5m/s ²



DCS577N - BARE UNIT

300MM DUAL PORT RIPPING FENCE FOR DCS577 HIGH TORQUE CIRCULAR SAW

DWS5100-XJ

Rip Capacity Left Side	300mm
Rip Capacity Right Side	360mm
Folds Down To	485mm x 76mm



54V XR FLEXVOLT PLUNGE SAW

DCS520T2

Blade Diameter	165 x 20mm
No Load Speed	2500 - 4200rpm
Max. Depth of Cut (90°)	59mm
Max. Depth of Cut (90°) with Rail	55mm
Max. Depth of Cut (45°)	44mm
Max. Depth of Cut (45°) with Rail	40mm
Bevel Capacity	47°



DCS520NT - BARE UNIT IN TSTAK™

54V XR FLEXVOLT RECIPROCATING SAW

DCS388T2

No Load Stroke Rate	0 - 3000spm
Stroke Length	28.6mm
Max. Cutting Capacity Timber	300mm
Max. Cutting Capacity Metal Profiles	130mm
Max. Cutting Capacity Plastic Tubes	160mm
Hand/Arm Vibration - Cutting Boards	12.5m/s ²



DCS388N - BARE UNIT

54V XR FLEXVOLT 190MM HIGH TORQUE CIRCULAR SAW

DCS690X2



Blade Diameter	230 x 22.2mm
No Load Speed	6600rpm
Max. Depth of Cut	83mm
Hand/Arm Vibration	4.2m/s ²
Sound Pressure	103.6 dB(A)
Sound Power	114.6 dB(A)
No. of Rotatable Guard Positions	5
Adjustable Dual Sided Water Delivery System	Yes
Heavy Load Indicator	Yes
Latched Battery Box	Yes



DCS690N (EXCLUDES BLADE)

54V XR FLEXVOLT 216MM MITRE SAW

DCS777T2



Blade Diameter	216 x 30mm
No Load Speed	6300rpm
Max. Cutting Capacity (90°/90°)	270 x 62mm
Max. Cutting Capacity (90°/45°)	270 x 48mm
Max. Cutting Capacity (45°/45°)	190 x 48mm
Bevel Capacity	48°
Mitre Capacity	50°/50°



DCS777N - BARE UNIT

54V XR FLEXVOLT 250MM MITRE SAW

DCS778T2



Blade Diameter	250 x 30mm
No Load Speed	4300rpm
Max. Cutting Capacity (90°/90°)	305 x 85mm
Max. Cutting Capacity (90°/45°)	215 x 85mm
Max. Cutting Capacity (45°/45°)	215 x 58mm
Bevel Capacity	48°
Mitre Capacity (Right/Left)	50°/50°



DCS778N - BARE UNIT

2 X 54V XR FLEXVOLT 305MM MITRE SAW

DHS780T2



Blade Diameter	305 x 30mm
No Load Speed	3800rpm
Max. Cutting Capacity (90°/90°)	303 x 110mm
Max. Cutting Capacity (90°/45°)	211 x 76mm
Max. Cutting Capacity (45°/45°)	268 x 44mm
Max. Cutting Capacity (45°/90°)	305 x 56mm
Mitre Capacity (Right/Left)	60°/50°
Bevel Capacity (Right/Left)	49°/49°



DHS780N - BARE UNIT DCB500-GB 240V MAINS ADAPTER DCB500-LX 110V MAINS ADAPTER

54V XR FLEXVOLT TABLE SAW

DCS7485T2



Blade Diameter	210 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	45mm
Bevel Capacity	-3 to 48°
Rip Capacity (Right)	610mm
Rip Capacity (Left)	318mm



DCS7485N - BARE UNIT

54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL

DCH333X2



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration - drilling into Concrete	7.5m/s ²
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J



DCH333NT - BARE UNIT IN TSTAK™

54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL

DCH334X2



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration - drilling into Concrete	7.5m/s ²
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J



DCH334N - BARE UNIT

54V XR FLEXVOLT SDS MAX 3-MODE HAMMER DRILL

DCH481X2



No Load Speed	0 - 540rpm
Max. Drilling Capacity Concrete	40mm
Hand/Arm Vibration - drilling into Concrete	9.4m/s ²
Blows Per Minute	0 - 3150bpm
Impact Energy	6.1J



DCH481N - BARE UNIT

54V XR FLEXVOLT 48MM 8KG SDS MAX COMBINATION HAMMER

DCH733X2



Max. Drilling Capacity Concrete	48mm
Max. Drilling Capacity Core Bit	125mm
Impact Energy	13.3J
No Load Speed	177-355rpm
Blows Per Minute	1350-2705bpm
Hand/Arm Vibration - hammer drilling into Concrete	9m/s ²
Hand/Arm Vibration - chiselling	8.8m/s ²
Sound Pressure	97dB(A)
Sound Power	108dB(A)
Category	8Kg



DCH733N - BARE UNIT

54V XR FLEXVOLT 52MM 10KG SDS-MAX ROTARY HAMMER

DCH773Y2



Max. Drilling Capacity Concrete	52mm
Max. Drilling Capacity Core Bit	150mm
Impact Energy	19.4J
No Load Speed	145-290rpm
Blows Per Minute	1,105 - 2,210bpm
Hand/Arm Vibration - hammer drilling into Concrete	10.1m/s ²
Hand/Arm Vibration - chiselling	9.4m/s ²
Sound Pressure	96dB(A)
Sound Power	107dB(A)
Category	10Kg



DCH773N - BARE UNIT

54V XR FLEXVOLT ANGLE GRINDER

DCG414T2



No Load Speed	9000rpm
Hand/Arm Vibration - Grinding	5.9m/s ²
Max. Disc Diameter	125mm
Spindle Thread	M14



DCG414N - BARE UNIT

54V XR FLEXVOLT ALLIGATOR SAW

DCS397T2



Blade Length	430mm
No Load Stroke Rate	2400spm
Hand/Arm Vibration - Concrete	4.1m/s ²
Stroke Length	40mm
Blade Stop	0.2sec
Includes TCT Class 12 Blade	



Class 20 blade suitable for Poroton and Building Blocks available separately (DT2976-QZ)



DCS397N - BARE UNIT

54V XR FLEXVOLT SPLIT SHAFT STRING TRIMMER

DCM5713X1

Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5500rpm
Cutting Width/Swathe	38cm
Brush Cutter	No
Sound Power Level	94dB(A)



**DCM5713N BARE UNIT DT20658 SPOOL & 2MM X 8.0M LINE DT20652-QZ LINE 2.5M X 68.6M
DT20656-QZ CAP, SPOOL & LINE DT20653-QZ BRUSH CUTTER TRI BLADE
DT20654-QZ BRUSH CUTTER STRAIGHT BLADE DT20655-QZ BRUSH CUTTER 4T BLADE**

54V XR FLEXVOLT TRIMMER & BRUSHCUTTER

DCM571X1

Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5600rpm
Cutting Width/Swathe	38cm
Brush Cutter	Yes
Sound Power Level	94dB(A)



**DCM571N - BARE UNIT DT20652-QZ LINE 2.5M X 68.6M DT20656-QZ CAP, SPOOL & LINE
DT20653-QZ BRUSH CUTTER TRI BLADE DT20654-QZ BRUSH CUTTER STRAIGHT BLADE
DT20655-QZ BRUSH CUTTER 4T BLADE**

54V XR FLEXVOLT 40CM CHAINSAW

DCM575X1

Bar and Chain Length	40cm
Chain Speed	15m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free
Sound Power Level	100.5dB(A)



Tree Surgeon's License is NOT required to operate this machine



**DCM575N - BARE UNIT DT20660-QZ BAR DT20662-QZ OIL DT20663-QZ 40CM REPLACEMENT CHAIN
DT20661-QZ 46CM BAR DT20664-QZ 46CM REPLACEMENT CHAIN**

54V XR FLEXVOLT COMPRESSOR

DCC1054T2

Tank Size	10L
Power	0.3kW/0.4HP
Pump Type	Oil-free
Max. Pressure	9.3Bar
Free Air Delivery	31 l/min @ 7Bar
Noise LPa 1sd	79dBA
Weight	11kg
18GA Brad Nails per Charge	1220 on 1x 6.0Ah
Regulator Type	OneTurn™



DCC1054N - BARE UNIT

54V XR FLEXVOLT DUAL HANDLE PADDLE MIXER

DCD240X2

No Load Speed	225/350/475/600/725rpm
Hand/Arm Vibration	<2.5m/s ²
Power Output	2000W
Max. Capacity	160mm
Ramp Up/Down Speed	2.5 secs
Spindle thread	m14
Battery Cover	Yes



DCD240N - BARE UNIT

Includes Centre Pull Down Swirl Paddle (550 x 200mm)

54V XR FLEXVOLT M-CLASS DUST EXTRACTOR

DCV586MT2



Extraction Classification	M-Class
Tank Capacity	11L
Wet/Dry	Yes
Hose length	2.5m
Hose Connection	AIRLOCK
Hose Diameter	32mm
Blower	No



DCV586N - BARE UNIT

DUST EXTRACTOR ACCESSORIES



DCV9401-XJ	Paper Bags for DCV586M Dust Extractor (5 Pack)
DCV9402-XJ	Cloth Bags for DCV586M Dust Extractor (5 Pack)
DCV5861-XJ	M-Class Filters for DCV586M Dust Extractor (Set of 2)



*HEPA Certified

54V XR FLEXVOLT RIGHT ANGLE/DIAMOND CORE DRILL

DCD470N



Power Output	2600UWO
Max. Torque	269Nm
Chuck Capacity	16mm Keyed
No. of Speeds	2
E-Clutch	Yes
No. Load Speed	0-400/0-1320rpm
Max. Drilling (Aerated Concrete)	152mm
Max. Drilling (Brick)	127mm
Max. Drilling (Wood with Holesaw)	158mm



MAINS ADAPTERS

DCB500-GB DCB500-LX



DCB500-GB	240V Mains Adapter For 2 x 54V XR FLEXVOLT 305mm Mitre Saw
DCB500-LX	110V Mains Adapter For 2 x 54V XR FLEXVOLT 305mm Mitre Saw



6.0AH XR FLEXVOLT 18/54V BATTERY PACK

DCB546



Voltage	18/54V
Battery	18V 6Ah XR FLEXVOLT
Length	125mm
Width	85mm
Height	90mm



9.0AH XR FLEXVOLT 18/54V BATTERY PACK

DCB547



Voltage	18/54V
Battery	18V 9Ah XR FLEXVOLT
Length	138mm
Width	87mm
Height	97mm



12.0AH XR FLEXVOLT 18/54V BATTERY PACK

DCB548

Voltage	18/54V
Battery	18V 12Ah XR FLEXVOLT
Length	138mm
Width	87mm
Height	97mm



XR FAST CHARGER

DCB118

Power Voltage Supply	240V
Battery Compatibility	18/54V
Charging Current	4A/8A
Charging Time (6.0Ah)	60mins



XR DUAL CHARGER

DCB132

Power Voltage Supply	240V
Battery Compatibility	12/14.4/18/54V
Charging Current (Single/Dual)	4A/2 x 4A



18V XR 4 PORT FAST CHARGER

DCB104

Power Voltage Supply	240V or 110V
Battery Compatibility	12/18/54V
Charging Current	8A
Charging Time (6Ah/9Ah/12Ah)	60/85 & 75**/100mins

** Battery Date Code 201811475B or later



AVAILABLE IN 240V OR 100V



BATTERY CHARGE TIMES



	DCB107	DCB113	DCB115	DCB118	DCB132	DCB119	DCB104
DCB546	270 Minutes	140 Minutes	90 Minutes	60 Minutes	90 Minutes	180 Minutes	60 Minutes
DCB547	420 Minutes	220 Minutes	140 / 135** Minutes	85 / 75** Minutes	140 / 135** Minutes	270 Minutes	85 / 75** Minutes
DCB548	540 Minutes	300 Minutes	180 Minutes	100 Minutes	180 Minutes	-	100 Minutes
DCB181	70 Minutes	35 Minutes	22 Minutes	22 Minutes	22 Minutes	45 Minutes	-
DCB182	185 Minutes	100 Minutes	60 Minutes	60 Minutes	140 / 135** Minutes	120 Minutes	40* / 60 Minutes
DCB183/B	90 Minutes	50 Minutes	30 Minutes	30 Minutes	30 Minutes	60 Minutes	22 Minutes
DCB184/B	240 Minutes	120 Minutes	75 Minutes	75 Minutes	75 Minutes	150 Minutes	50* / 75 Minutes
DCB185	60 Minutes	30 Minutes	22 Minutes	22 Minutes	22 Minutes	40 Minutes	22 Minutes
DCB187	140 Minutes	70 Minutes	45 Minutes	45 Minutes	45 Minutes	90 Minutes	45 Minutes
DCB144	240 Minutes	120 Minutes	75 Minutes	-	75 Minutes	150 Minutes	-
DCB145	60 Minutes	30 Minutes	22 Minutes	-	22 Minutes	40 Minutes	-
DCB125	60 Minutes	30 Minutes	22 Minutes	-	22 Minutes	40 Minutes	22 Minutes
DCB127	90 Minutes	50 Minutes	30 Minutes	-	30 Minutes	60 Minutes	-

12 AH



GUARANTEED TOUGH.®

* Battery date code 201536 or later

** Date code 201811475B or later

54V XR FLEXVOLT GRINDER AND 18V XR HAMMER DRILL TWIN KIT**DCK2055T2T**

Kit Includes:
 DCD996 Premium Hammer Drill Driver
 DCG414 54V Angle Grinder
 DCB546 2 x 54V Flexvolt Batteries
 DCB118 Fast Charger
 TSTAK™ Compatible and TSTAK™ II Kit Boxes

**XR FLEX VOLT****DCD240N - BARE UNIT****54V XR FLEXVOLT CIRCULAR SAW AND 18V XR HAMMER DRILL TWIN KIT****DCK2056T2T**

Kit Includes:
 DCD996 Premium Hammer Drill Driver
 DCS575 54V Circ Saw
 DCB546 2 x 54V Flexvolt Batteries
 DCB118 Fast Charger
 TSTAK™ compatible and TSTAK™ VI kit boxes

**XR FLEX VOLT****54V XR FLEXVOLT RECIP SAW AND 18V XR HAMMER DRILL TWIN KIT****DCK2057T2T**

Kit Includes:
 DCD996 Premium Hammer Drill Driver
 DCS575 54V Recip Saw
 DCB546 2 x 54V Flexvolt Batteries
 DCB118 Fast Charger
 TSTAK™ compatible and TSTAK™ II kit boxes

**XR FLEX VOLT****XR**

18V
MORE CAPACITY.
MORE RUNTIME.
SAME SIZE.

The XR Li-Ion range offers EXTREME runtime, increased efficiency and improved performance. The intelligent switch module combined with improved brushless technology helps to increase lifetime of both tool and battery. 18V XR batteries meet all users' needs - from ergonomic design (2Ah) to higher capacity (5Ah).

www.DEWALT.co.uk

18V XR TOOL CONNECT

GET CONNECTED. TAKE CONTROL.

Save time and money with Tool Connect. Using the intelligent inventory management platform you will easily maximise your productivity and protect your investment.

Manage and track all your assets with the Bluetooth enabled tag or by connecting the 18V XR battery connector to your existing 18V XR tools. With the new smart 18V tools, you can also customise the tools specifications for the perfect performance.

Take complete control of your own assets, or those of your team, via the Tool Connect App or web platform, and get ready for the jobsite of the future.



18V XR BATTERY

DCB184B



Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatible	Yes



18V XR BATTERY

DCB183B



Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatible	Yes



18V XR COMPACT HAMMER DRILL DRIVER WITH 2 X 2.0AH BATTERIES

DCD797D2B



Max. Torque	70Nm
No Load Speed	0 - 550/2000rpm
Beats Per Minute	0 - 9350/34000
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	13mm



18V XR XRP 3 SPEED PREMIUM COMBI DRILL

DCD997P2B



Max. Torque	95Nm
No Load Speed	0 - 450/1300/2000rpm
No Load Speed (Hammer)	0 - 500/1500/2250
Beats Per Minute	0 - 8600/25500/38250bpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm
Max. Drilling Capacity Masonry	13mm




**18V XR COMPACT HAMMER DRILL +
IMPACT DRIVER + 2 X 5.0AH BATTERIES COMBI DRILL**

DCK2500P2B

Kit Includes:

- DCD797 Tool Connect Compact Brushless Hammer Drill
- DCF888 Tool Connect Brushless Impact Driver
- DCB184B 2 x 5.0 Ah Tool Connect Batteries
- DS150 Toughsystem™ Kitbox
- DCB115 240V Charger



18V XR IMPACT DRIVER 2AH

DCF888D2B

Max. Torque	205Nm
No Load Speed	0 - 1000/2800/3250rpm
Impacts Per Minute	0 - 3800ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M12



18V XR CONNECTOR

DCE040

IP Rating	IP68
DCE041K4	4 pack
DCE041K10	10 pack
DCE041K10-XJ	Tool Connect Tag 10 pack
DCE041K4-XJ	Tool Connect Tag 4 pack



18V XR XRP 3 SPEED PREMIUM COMBI DRILL

DCD996P2

Max. Torque	95Nm
No Load Speed	0 - 450/1300/2000rpm
No Load Speed (Hammer)	0 - 500/1500/2250rpm
Beats Per Minute	0 - 8600/25500/38250bpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm
Max. Drilling Capacity Masonry	13mm



DCD997P2B-GB - 5AH TOOLCONNECT BLUETOOTH BATTERIES

18V XR XRP 3 SPEED COMBI DRILL

DCD985M2

Max. Torque	80Nm
No Load Speed	0 - 575/1350/2000rpm
Beats Per Minute	9775/22900bpm
Max. Drilling Capacity Wood	50mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	16mm



18V XR 2 SPEED COMPACT COMBI DRILL

DCD796P2

Max. Torque	70Nm
No Load Speed	0 - 550/2000rpm
Beats Per Minute	0 - 9350/34000bpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	13mm




DCD796D2 - 2AH BATTERIES DCD797D2B - 2AH TOOLCONNECT BLUETOOTH BATTERIES

18V XR XRP 3 SPEED PREMIUM DRILL DRIVER

DCD991P2


Max. Torque	95Nm
No Load Speed	0 - 450/1300/2000rpm
No Load Speed (Hammer Mode)	0 - 500/1500/2250rpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm



18V XR 2 SPEED COMPACT DRILL DRIVER

DCD791P2

Max. Torque	70Nm
No Load Speed	0 - 550/2000rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm



18V XR 3 SPEED IMPACT DRIVER

DCF887P2

Max. Torque	205Nm
No Load Speed	0 - 1000/2800/3250rpm
Impacts Per Minute	0 - 3800ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M12




DCF887D2 - 2AH BATTERIES DCF887N - BARE UNIT

18V XR COMPACT IMPACT WRENCH

DCF880M2

Max. Torque	203Nm
No Load Speed	0 - 2300rpm
Impacts Per Minute	0 - 2700ipm
Bit Holder	1/2" (13mm)
Max. Bolt Diameter	M16




DCF880N - BARE UNIT

18V XR 1/2" COMPACT HIGH TORQUE WRENCH

DCF894P2

Max. Torque	447Nm
No Load speed	0-900/0-2000rpm
Impacts Per Minute	3100ipm
Hand/Arm Vibration	13.5m/s ²
Power Output	580W
Bit Holder	1/2" (13mm)
PRECISION WRENCH™	Yes



DCF894N - BARE UNIT

18V XR 3 SPEED HIGH TORQUE IMPACT WRENCH

DCF899P2

Max. Torque	135/400/950Nm
No Load Speed	0 - 400/1200/1900rpm
Impacts Per Minute	0 - 2400ipm
Bit Holder	1/2" (12.7mm)
Max. Bolt Diameter	M20
Power Output	610W



DCF899N - BARE UNIT DCF899HN - BARE UNIT HOG RING

18V XR BRUSHLESS 3/4" HIGH TORQUE IMPACT WRENCH

DCF897N

Max. Torque	950Nm
No Load Speed	0-1900rpm
Impacts Per Minute	0-2400ipm
Bit Holder	3/4" (19.05mm)
Power Output	610W




18V XR COLLATED SCREWDRIVER

DCF620P2K

Max. Torque	5 - 30Nm
No Load Speed	0 - 4400rpm
Bit Holder	1/4" (6.35mm)
Power Output	435W



DCF6201 Collated Screw Magazine included in kit versions only.




DCF620D2K - 2AH BATTERIES DCF620N - BARE UNIT DCF6201 - COLLATED MECHANISM

18V XR SELF DRILLING SCREWDRIVER

DCF622P2

Max. Torque	34Nm
No Load Speed	0 - 2000rpm
Bit Holder	1/4" (6.35mm)
Max. Screw Length	6.0mm
Power Output	850W



DCF622N - BARE UNIT

18V XR RIGHT ANGLE DRILL

DCD740C1



Max. Torque	33Nm
No Load Speed	0 - 650/2000rpm
Max. Drilling Capacity Wood	28mm
Max. Drilling Capacity Metal	10mm




DCD740N - BARE UNIT

18V XR 24MM 2KG SDS-PLUS 3-MODE HAMMER

DCH283P2



No Load Speed	0 - 980rpm
Blows Per Minute	0 - 4480bpm
Max. Drilling Capacity Concrete	26mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Wood	30mm
Impact Energy	2.8J
Hand/Arm Vibration	8.5m/s ²



DCH283N - BARE UNIT

18V XR SDS PLUS 3-MODE HAMMER DRILL

DCH273P2



No Load Speed	0 - 1100rpm
Blows Per Minute	0 - 4600bpm
Max. Drilling Capacity Concrete	24mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Wood	26mm
Impact Energy	2.1J
Hand/Arm Vibration	6.6m/s ²



DCH273N - BARE UNIT DCH274P2 - INCLUDES QUICK CHANGE CHUCK

18V XR SDS PLUS 3-MODE HAMMER DRILL

DCH253M2



No Load Speed	0 - 1200rpm
Blows Per Minute	0 - 4500bpm
Max. Drilling Capacity Concrete	24mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Wood	26mm
Impact Energy	2.1J
Hand/Arm Vibration	6.6m/s ²



DCH253N - BARE UNIT DCH254M2 - INCLUDES QUICK CHANGE CHUCK

18V XR 125MM ANGLE GRINDER

DCG405P2



No Load Speed	9000rpm
Max. Disc Diameter	125mm
Spindle Thread	M14
Hand/Arm Vibration	4.4m/s ²



DCG405N - BARE UNIT DCG405FN - BARE UNIT FLATHEAD

18V XR 125MM ANGLE GRINDER

DCG412M2



No Load Speed	7000rpm
Max. Disc Diameter	125mm
Spindle Thread	M14
Hand/Arm Vibration	6.0m/s ²



DCG412N - BARE UNIT

18V XR BRUSHLESS DIE GRINDER

DCG426P2



Power Output	760 Watt
No Load Speed	0 - 10000/17500/25000
Max. Disc Diameter	38mm
Collet Size	6mm
Hand/Arm Vibration - Grinding	4.4m/s ²



DCG426N - NAKED UNIT

18V XR CONCRETE NAILER

DCN890P2



Nail Diameter	2.6-3.7mm
Magazine Angle	15°
Nail Length	13 - 57mm
Firing Mode	Rapid Cycle™ and Sequential



DCN890N - BARE UNIT

18V XR CONCRETE NAILER ATTACHMENTS

DCN8901-XJ	Driver Blade Replacement Kit for DCN890
DCN8902-XJ	Magnetic Contact Trip for DCN890
DCN8903-XJ	Non-Magnetic Contact Trip for DCN890
DCN8904-XJ	Drywall Contact Trip for DCN890
DCN8905-XJ	Extension Pole for DCN890



DCN8901-XJ



DCN8902-XJ



DCN8903-XJ



DCN8904-XJ



DCN8905-XJ



DCN890N - BARE UNIT

18V XR FRAMING NAILER

DCN692P2



Nail Diameter	2.8-3.3mm
Magazine Angle	30 - 34°
Nail Length	50 - 90mm
Firing Mode	Bump & Sequential
Temperature Range	-20 to 50°C



DCN692N - BARE UNIT DCN6901 - RETURNS SPRING KIT

18V XR METAL CONNECTOR NAILER

DCN694P2



Nail Diameter	3.4-4.0mm
Magazine Angle	33°
Nail Length	35mm
Firing Mode	Rapid Cycle™ and Sequential
Temperature Range	-20 to 50°C



DCN694N - BARE UNIT

18V XR SECOND FIX NAILER

DCN660P2

Nail Diameter	1.6mm (16Ga)
Magazine Angle	20°
Nail Length	32 - 63mm
Firing Mode	Bump & Sequential
Temperature Range	-20 to 50°C



DCN660D2 - KIT WITH 2AH BATTERIES DCN660N - BARE UNIT

18V XR BRAD NAILER

DCN680D2

Nail Diameter	1.25mm (18Ga)
Magazine Angle	0° (Straight)
Nail Length	15 - 54mm
Firing Mode	Bump & Sequential
Temperature Range	-20 to 50°C



DCN680N - BARE UNIT

18V XR NARROW CROWN STAPLER

DCN681D2

Nail Diameter	1.25mm (18Ga)
Staple Crown	5.6mm (SX staples)
Magazine Angle	0° (Straight)
Nail Length	12 - 38mm
Firing Mode	Bump & Sequential



DCN681N - BARE UNIT

18V XR FLOORING STAPLER

DCN682D2

Nail Diameter	1.25mm (18Ga)
Staple Crown	5.6mm (SX staples)
Magazine Angle	0° (Straight)
Nail Length	12 - 38mm
Firing Mode	Rapid Cycle & Sequential
Temperature Range	-20 to 50°C



DCN682N - BARE UNIT

18V XR ELECTRICIANS STAPLER

DCN701D2

Proprietary Fastener	25x17mm Crown Insulated Staples
Fuel cells required	No
LED	Yes
Shots/Charge	1200
Staple Capacity	35 (2 x 15 + 5)
Rapid Cycle	Yes
Tool Free Depth Adjust	Yes, Automatic
Cable Guide	Yes



DCN701N - BARE UNIT DRS18100-XJ - 25MM X 17MM CROWN INSULATED STAPLES (540)

18V XR 184MM MITRE SAW

DCS365M2

Blade Diameter	184 x 16mm
No Load Speed	3750rpm
Max. Cutting Capacity	250 x 50mm
Bevel Capacity	48°
Mitre Capacity	48 / 48°



DCS365N - BARE UNIT

18 XR BRUSHLESS 184MM CIRCULAR SAW

DCS570P2



Blade Diameter	184mm
No Load Speed	5500rpm
Max. Depth of Cut (90°)	64mm
Max. Depth of Cut (45°)	48mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²



DCS570N - BARE UNIT

18V XR CIRCULAR SAW

DCS391M2



Blade Diameter	165 x 20mm
No Load Speed	5150rpm
Max. Depth of Cut	55mm
Max. Depth of Cut (45°)	42.1mm
Bevel Capacity	50°
Hand/Arm Vibration	<2.5 m/s ²



DCS391N - BARE UNIT

18V XR METAL CUTTING CIRCULAR SAW

DCS373N



Blade Diameter	140 x 20mm
No Load Speed	3700rpm
Max. Depth of Cut	43mm



18V XR JIGSAW

DCS331M2



No Load stroke Rate	0 - 3000spm
Max. Depth of Cut Wood	135mm
Max. Depth of Cut Steel	10mm
Max. Depth of Cut Aluminium	25mm
Bevel Capacity	45°
Stroke Length	26mm



DCS331N - BARE UNIT

18V XR BRUSHLESS TOP HANDLE JIGSAW

DCS334P2



No Load stroke Rate	0 - 3200spm
Max. Depth of Cut Wood	135mm
Max. Depth of Cut Steel	10mm
Max. Depth of Cut Aluminium	25mm
Bevel Capacity	45°
Stroke Length	26mm
Hand/Arm Vibration - Cutting Wood	7m/s ²



DCS334N - BARE UNIT

18V XR BRUSHLESS BODY GRIP JIGSAW

DCS335N



No Load Stroke Rate	0 - 3200spm
Max. Depth of Cut Wood	135mm
Max. Depth of Cut Steel	10mm
Bevel Capacity	45°
Stroke Length	26mm
Hand/Arm Vibration - Cutting Wood	5.3m/s ²



18V XR RECIPROCATING SAW

DCS380M2



No Load Stroke Rate	0 - 2950spm
Max. Cutting Capacity Wood	300mm
Steel Sections & Pipes	100mm
PVC	100mm
Stroke Length	28.6mm



DCS380N - BARE UNIT

18V XR COMPACT RECIPROCATING SAW

DCS367N



No Load Stroke Rate	0 - 2900spm
Max. Cutting Capacity Wood	300mm
Steel Sections & Pipes	100mm
PVC	100mm
Stroke Length	28.6mm



18V XR BANDSAW

DCS371N



No Load Speed	174 Metre/min
Max. Cutting Capacity	63.5mm
Max. Watts Out	460W



18V XR PLANER

DCP580P2



No Load Speed	15000rpm
Max. Depth of Cut	2.0mm
Max. Rebating Depth	9.0mm
Planer Width	82mm



DCP580N - BARE UNIT DWV9390 - PLANER DUST BAG

18V XR OSCILLATING TOOL

DCS355M2



Oscillations per Minute	0 - 20000opm
Tool Free Accessory Fitment	Yes
Accessories Included	35



DCS355D2 - 2AH BATTERIES DCS355N - BARE UNIT

18V XR 1/4" (8MM) ROUTER, FIXED/PLUNGE BASES

DCW604NT



Power Output	930W
No Load Speed	1600 - 25500pm
Max. Cutter Diameter	30mm
Plunge Stroke Movement	55mm
Collet Size	1/4" 6-8mm
Hand/Arm Vibration	7m/s ²



18V XR 125MM RANDOM ORBIT SANDER

DCW210N



Orbits Per Minute	8,000-12,000opm
Orbit Diameter	2.6mm
Paper Size	125mm
Fabric Dust Bag	Yes
Built-In Extractor Ports	Yes



18V XR DRYWALL CUT OUT TOOL

DCS551N



No Load Speed	26000rpm
Included Collets	3.2mm (1/8")
Max. Watts Out	550W



This product comes without a battery



18V XR THREADED ROD CUTTER

DCS350N



Speed	30spm
Mild Steel	M6, M8, M10, M12
Stainless Steel	M6, M8, M10
Cutters Included	M6, M8, M10, M12



18V XR SHEARS

DCS491N



Speed	0 - 2450spm
Max. Cutting Capacity	1.2mm
Mild Steel	1.3mm
Stainless Steel	1.3mm



18V XR CAULK GUN

DCE580N



Carrier Size	300 - 600ml
Push Force	2500N
Push Speed	51 - 333mm/min



DCE5601 - 300ML CARTRIDGE ATTACHMENT

18V XR GREASE GUN

DCGG571M1



Output Pressure	690bar, 10000PSI
Feed Rate	147g/min
Grease Type	Up To NLGI #2
Grease Capacity Bulk	453g
Cartridge	400g



18V XR BRUSHLESS STRING TRIMMER (SPLIT SHAFT)

DCM561P1S



Cutting Width/Swathe	33cm
Line Length Diameter	7.5 x 2mm
Cutting Speed	0 - 4600/0 - 6000rpm
Sound Pressure	79.5dB(A)
Sound Power	93dB(A)
Vibration	3.5m/s ²



DCM561PBS - BARE UNIT DT20658-QZ SPOOL & 2MM X 8.0M LINE DT20652-QZ LINE 2.5MM X 68.6M

DT20656-QZ CAP, SPOOL & LINE

18V XR BLOWER

DCM562P1



Blow Speed	145km/h / 90mph
Variable Speed	Yes
Lock On Switch	Yes
Sound Pressure	87B(A)
Sound Power	92.5dB(A)
Vibration	1.5m/s ²



DCM562PB - BARE UNIT

2 X 18V XR 48CM LAWNMOWER

DCMW564P2



Battery Type	2 x 18V 5.0Ah
Area of Cut Per Charge	800m ²
Metal Deck Size	51cm
Grass Collection Capacity	55L
Roller	Yes
Mulching Attachment	Yes
Cutting Heights	25-86mm
Noise Level	92dB(A)



DCMW564RN - BARE UNIT

18V XR HEDGE TRIMMER

DCM563P1



Blade Length	55.8cm
Blade strokes per min	1400
Chain Brake	< 1sec
Cutting Gap	19mm
Sound Pressure	80.5B(A)
Sound Power	98dB(A)
Vibration	2m/s ²



DCM563PB - BARE UNIT DT20666-QZ - LUBRICANT

18V XR CHAINSAW

DCM565P1



Bar Length	30cm
Chain Speed	7.7m/s
Chain Brake	< 1sec
Motor Speed	3750-4200rpm
Variable Speed	Yes
Chain Tensioning	Tool Free
Max Cutting Length	26cm
Sound Pressure	76.5dB(A)
Sound Power	96.5dB(A)
Vibration	3.5m/s ²



DCM565N - BARE UNIT DT20662-QZ OIL DT20676-QZ CHAIN DT20665-QZ CHAIN & BAR

18V XR COMPACT BLOWER

DCV100



Blow Speed	80m/s
Variable Speed	Yes
Lock On Switch	Yes
Fan Speed	0-18000rpm
Sound Pressure	85dB(A)
Sound Power	96dB(A)
Vibration	<2.5m/s ²



XR L-CLASS EXTRACTOR

DCV584L



Battery Compatibility	14.4/18/54V
Max. Airflow	15.9L/Sec
Capacity	7.5L
Wet & Dry Filter	Yes
Hose Length/Diameter	2m x 32mm
Sound Pressure	76dB(A)
Sound Power	87dB(A)



18V XR COMPACT WET & DRY VACUUM

DCV517N



Battery Compatibility	18V
Max. Airflow	15.9L/Sec
Capacity	1.9L
Wet & Dry Filter	Yes
Hose Length/Diameter	1m x 32mm
Sound Pressure	76dB(A)
Sound Power	87dB(A)



18V XR COMPACT RADIO

DCR020



Battery Compatibility	12/14.4/18V
Power Source	AC/DC
Modes	DAB(+)/FM/AUX/USB
USB Charger	5V/2.1A
AUX Input	3.5mm



12V/18V/54V BLUETOOTH SPEAKER

DCR011



Battery Compatibility	12/18/54V
Sound Pressure Level	SPL > 97dB @1m
High Signal-to-Noise Ratio	80dB SNR
Impedance	6 Ohms
Audio Output Power	10Watts
Audio/video/remote control profile (AVRCP)	Yes
2.1Amp USB Charging Port	Yes
2 x 76mm Speakers	
Base Port	Yes
Size	255x140x183mm



BLUETOOTH ADAPTOR

DCR002



Connection Type	3.5mm
-----------------	-------



18V XR COMPACT LED PIVOT LIGHT

DCL040



Output	110 Lumen
Battery Pattern	2 Zone
Light Settings	1
Pivoting Head	Yes



18V XR LED SPOT LIGHT

DCL043



Output	120 - 1000 Lumen
Beam Pattern	Area - 180°
Light Settings	2
IP Rating	IP54
Pivoting Head	Yes



18V XR LED PIVOT LIGHT

DCL050



Output	250 - 500 Lumen
Beam Pattern	Area - 180°
Light Settings	2
IP Rating	IP54
Pivoting Head	Yes



18V XR LED AREA LIGHT

DCL060



Output	1500 Lumen
Beam Pattern	Area
Light Settings	2
Pivoting Head	Yes



18V XR LED TRIPOD LIGHT

DCL079



Light output	1000lm, 1800lm, 3000lm
IP Rating	IP55
Max. Runtime	15.6 hours
Beam Pattern	Area - 180°
Light Settings	3
Pivoting Head	Yes



18V XR INFLATOR

DCC018N



Voltage Adaptor	12V
Max. Pressure	11bar
Power Supply	12V/240V/18V
Air Flow	High & Low Pressure
Output	0.35l/min@6.2 bar, 0.6l/min@2 bar
Deflate Function	Yes
Gauge Display	Digital x 2
Auto Stop	Yes (High Pressure)
Maximum Pressure	11bar/160psi
Gauge Accuracy	+/- 0.15bar



18V XR 4AH BATTERY

DCB182



Battery Capacity	4.0Ah
Tool Connect Compatible	No



18V XR 5AH BATTERY

DCB184



Battery Capacity	5.0Ah
Tool Connect Compatible	No



18V 4AH COMPACT BATTERY

DCB189



Battery Capacity	4Ah
Tool Connect Compatible	No



18V XR 2AH BATTERY

DCB183



Battery Capacity	2Ah
Tool Connect Compatible	No



18V XR 12V CAR CHARGER

DCB119



Battery	Li-Ion
Charging Current	2.5A
Charging Time	40-90 min



18V XR 240V CHARGER

DCB115



Battery	XR Li-Ion
Charging Current	4.0A
Charging Time	(2Ah) 30min




18V XR USB CHARGER

DCB090



Voltage	12V, 14.4V, 18V
Battery	Li-Ion
Charging Current	1.5A



18V XR COMPACT TWIN PACK

DCK2062M2T



Kit Includes:
 DCD709 18V XR Brushless Compact Hammer Drill Driver
 DCF809 18V XR Brushless Ultra Compact Impact Driver



18V XR COMPACT TWIN KIT

DCK266P2



Kit Includes:
 DCD796 2 Speed Combi Drill
 DCF887 Impact Driver
 DCB184 2 x 5Ah Batteries
 DCB115 240V Charger
 ODS150 Toughsystem™ Kitbox



DCK266D2 - 2AH BATTERIES

18V XR PREMIUM TWIN KIT

DCK276P2



- Kit Includes:
 DCD996 XRP 3 Speed Combi Drill
 DCF887 Impact Driver
 DCB184 2 x 5Ah Batteries
 DCB115 240V Charger
 DS150 Toughsystem™ Kitbox



18V XR SIX KIT

DCK694P3



- Kit Includes:
 DCD996 XRP 3 Speed Combi Drill
 DCF887 Impact Driver
 DCS391 Circular Saw
 DCG412 Grinder
 DCS331 Jigsaw
 DCL040 LED Pivot Light
 DCB182 3 x 5Ah Batteries
 DCB115 240V Charger
 DS300 2 x Toughsystem™ Kitbox



18V XR SDS TWIN KIT

DCK229P2T



- Kit Includes:
 DCD996 XRP 3 Speed Combi Drill
 DCH273 3 Mode SDS Hammer Drill
 DCB184 2 x 5Ah Batteries
 DCB115 240V Charger
 DWST1-71195 TSTAK™ VI Kitbox



18V XR SIX KIT

DCK665P3T



- Kit Includes:
 DCD796 2 Speed Combi Drill
 DCS355 Oscillating Tool
 DCP580 Planer
 DWV9390 Planer Bag
 DCS391 Circular Saw
 DCS331 Jigsaw
 DCL050 LED Pivot Light
 DCB182 3 x 5Ah Batteries
 DCB115 240V Charger
 DWST1-71195 2 x TSTAK™ VI Kitbox



18V XR BRUSHLESS COMPACT 6 PIECE KIT**DCK623P3**

Kit Includes:

- DCG405 18V XR 125mm Small Angle Grinder
- DCS367 18V XR Compact Reciprocating Saw
- DCS570 18V XR 184mm Circular Saw
- DCF887 18V XR 3-Speed Impact Driver
- DCD796 18V XR Compact Hammer Drill Driver
- DCL050 18V XR Handheld LED Area Light
- 1-70-322 x 2 Toughsystem™ DS300
- DCB184 x 3 18V XR 5.0Ah Batteries
- DCB115 XR Multi-Voltage Charger

**12V XR**

Offering Extreme runtime, the 12V XR range offers great performance combined with a lighter design.

www.DEWALT.co.uk

12V XR SUB-COMPACT DRILL DRIVER

DCD701D2

Length	152mm
No Load Speed	0-425 / 0-1500rpm
Max. Torque	57.5Nm
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Metal	10mm



12V XR COMPACT DRILL DRIVER

DCD710D2


No Load Speed	0 - 400/1500rpm
Max. Torque	24Nm
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Metal	10mm



12V XR COMPACT HAMMER DRILL DRIVER

DCD716D2

No Load Speed	0-400/1500rpm
Max. Torque	30Nm
Beats Per Minute	0-6000/22500bpm
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Metal	10mm
Max. Drilling Capacity Masonry	8mm



12V XR SUB-COMPACT IMPACT DRIVER

DCF801D2

No Load Speed	0 - 950 / 0 - 1950 / 0 - 2850rpm
Max. Torque	163Nm
Impacts Per Minute	3600ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M10



12V XR COMPACT IMPACT DRIVER

DCF815D2


No Load Speed	0 - 2450rpm
Max. Torque	107Nm
Impacts Per Minute	0 - 3400ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M10



12V XR SUB-COMPACT 3/8" IMPACT WRENCH

DCF902D2

No Load Speed	0 - 2850 / 0 - 1000 / 0 - 2850rpm
Max. Torque	168Nm
Impacts Per Minute	0 - 3600ipm
Bit Holder	3/8" (9.525mm)
Max. Bolt Diameter	M14



12V XR COMPACT WRENCH

DCF813D2


No Load Speed	0 - 2450rpm
Max. Torque	130Nm
Impacts Per Minute	0 - 3400ipm
Bit Holder	3/8" (9.525mm) Hog Ring
Max. Bolt Diameter	M12



12V XR SUB-COMPACT SCREWDRIVER

DCF601D2

No Load Speed	0 - 1100rpm
Max. Torque	8Nm
Bit Holder	1/4" (6.35mm)



12V XR SCREWDRIVER

DCF610D2

No Load Speed	0 - 1050rpm
Max. Torque	8Nm
Bit Holder	1/4" (6.35mm)



12V XR COMPACT RECIPROCATING SAW

DCS310D2

No Load Stroke Rate	0 - 2700spm
Stroke Length	14mm
Hand and Arm Vibration - cutting boards	8.5m/s ²



12V XR INSPECTION CAMERA

DCT410D1

Cable Size	900 x 17mm
Waterproof Cable	Yes
Wireless Screen	Yes
Zoom	3x
Data Storage	Micro SD Card
Resolution	320 x 480 dpi



DCT410N - BARE UNIT

12V XR INFRARED THERMOMETER

DCT414N

Temperature Range	-30°C to 550°C
Screen Size	36mm
Adjustable Emissivity	0.1 to 1.0
Field of view	30cm x 2.5cm
Data Storage	Micro SD card
LED Indicator	Yes



BARE UNIT

12V XR SUB-COMPACT TWIN PACK

DCK2110L2T



- Kit Includes:
 DCD701 12V XR Brushless Sub-Compact Drill Driver
 DCF801 12V XR Brushless Sub-Compact Impact Driver
 DCB124 2x3Ah Batteries
 DCB115 Multi Voltage Charger
 TSTAK™ II Kitbox



12V XR COMPACT TWIN KIT

DCK218D2T



- Kit Includes:
 DCD716 Hammer Drill Driver
 DCF815 Impact Driver
 2 x DCB127 2Ah Batteries
 DCB113 Multi Voltage Charger
 TSTAK™ II Kitbox



12V XR TWIN KIT

DCK211D2T



- Kit Includes:
 DCD710 Drill Driver
 DCF815 Impact Driver
 DCB127 2 x 2Ah Batteries
 DCB113 Multi Voltage Charger
 TSTAK™ V Clear Lid Organiser



12V XR COMPACT LED TORCH

DCL510N



Output	130 Lumens
Size	123mm x 52mm



BARE UNIT

12V XR 3AH BATTERY

DCB124-XJ



Voltage	12V
Battery Capacity	3Ah





LASERS

Fast Precision Levelling

DeWALT Laser levels measure up to the toughest standards whilst providing the precision accuracy needed to get the job done quickly and accurately.

The new 12V / 18V compatible range shares the same battery as our 12V / 18V power tools and are available in both red and green beam versions.

www.DEWALT.co.uk

18V XR ROTARY LASER

DCE074D1R

Beam Colour	Red
Accuracy	+/-3mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range With Detector	450m
Sloping Range	+/-10°
IP Rating	54
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Spot Only Up



18V XR ROTARY LASER

DCE079D1G

Beam Colour	Green
Accuracy	+/-1.5mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range With Detector	600m
Sloping Range	+/-10°
IP Rating	67
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical only, Horizontal only, Spot Up & Down



12V XR CROSS LINE LASER

DCE088D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range With Detector	50m
IP Rating	65
Number Of Beams	2 - Horizontal, Vertical
Tripod Connection	5/8", 1/4"
Pendulum Lock	Yes
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line



12V XR 3 X 360° CROSS LINE LASER

DCE089D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range With Detector	50m
IP Rating	65
Number Of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	360° Horizontal, 360° Vertical, 360° Vertical, 6x cross line plumb up & down



12V XR 5 SPOT CROSS LINE LASER

DCE0825D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m Spot +/-2 @ 10m
Self-levelling Range	+/-4°
Max. Working Range Line/Spot	30m/45m
IP Rating	65
Number Of Beams	7 - Cross Line plus 5 spots
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line, 3 Spot Only: Up, Down, Front, 5 Spot Only: Up, Down, Front, Both Sides



CROSS LINE LASER

DW088CG

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range with Detector	20-50m
IP Rating	54
Number Of Beams	2 - Horizontal, Vertical
Tripod Connection	1/4"
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line
Power Source	3 x AAA



DW088K - RED BEAM MAX. WORKING RANGE 15-50M WITH DETECTOR. DW088KD - INCLUDES DETECTOR

CROSS LINE LASER

DW089K

Beam Colour	Red
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range with Detector	50m
IP Rating	54
Number Of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	5/8"
Laser Class	2
Modes Control	3 beams Separately 1 Horizontal, 2 Vertical, Cross line & 90° s ²
Power Source	4AA



RED LINE LASER DETECTOR

DE0892

Compatibility	DW088, DW089
Max. Working Range	50m
Power Source	1 x 9V



GREEN LINE LASER DETECTOR

DE0892G

Compatibility	DW088CG, DCE088D1G, DCE089D1G, DCE0825D1G
Max. Working Range	50m
Power Source	1 x 9V



WATERPROOF DIGITAL ROTARY LASER DETECTOR

DE0772

Compatibility	DCE074D1R
Working Range	Rotary > 300m (Radius)
Power Source	1 x 9V
Adjustable Volume Control	Up to 100dBA



3 SPOT LASER

DW083K

Beam Colour	Red
Accuracy	+/-2mm @ 10m
Self-levelling Range	+/-4°
IP Rating	54
Number Of Beams	3 - Horizontal, 2 Vertical (Up & Down)
Indoor Visibility Range	30m
Tripod Connection	1/4"
Laser Class	2
Power Source	4 x AA



30M LASER DISTANCE MEASURE

DW033

Levelling Accuracy	+/-3mm @ 10m
Max. Working Range	30m
Laser Class	2
Power Source	2 x AAA



30M BLUETOOTH LASER DISTANCE MEASURE

DW099S

Accuracy	+/-2mm @ 10m
IP Rating	54
Indoor Visibility Range	30m
Power Source	2 x AAA
Calculations	Distance, Area, Volume
Tool Connect Compatible	Yes
App Available	iOS/Android



50M BLUETOOTH LASER DISTANCE MEASURE

DW03050

Accuracy	+/-1.5mm @ 10m
IP Rating	65
Indoor Visibility Range	50m
Power Source	2 x AAA
Calculations	Distance, Area, Volume, Pythagoras (2 & 3 point)
Tool Connect Compatible	Yes
App Available	iOS/Android



100M BLUETOOTH LASER DISTANCE MEASURE

DW03101

Levelling Accuracy	+/-1.5mm @ 10m
IP Rating	65
Indoor Visibility Range	100m
Power Source	2 x AAA
Calculations	Distance, Area, Volume, Pythagoras (2 & 3 point), Timer Function, Inclinometer, Partial Height
Tool Connect Compatible	Yes
App Available	iOS/Android



LASER ACCESSORIES

DE0730

Red Target Card



LASER ACCESSORIES

DE0730G

Green Target Card



LASER ACCESSORIES

DE0881T-XJ

Open Height	1.84m
Close Height	0.75m
Material Composition	Aluminium-legs, Tripod Head Plastic - Mounting Platform
Thread Mount	1/4"
Crank for Height Adjustment	Yes
Type of Head	Height Adjustable/Pivot/Tilt
Integral Vial on Head	Yes
Adapter	5/8" to 1/4"
Compatibility	Line & Spot Lasers, Cameras With 1/4" Thread



LASER ACCESSORIES

DE0735

Elevated Laser Tripod

Telescopic Head	Yes
Adjustable Height	1.15 - 3m
Material	Aluminium
Mounting Thread	11 x 5/8"
Adapter	5/8" - 1/4"
Integrated vial on head	



LASER ACCESSORIES

DE0736

Laser Tripod

Adjustable Height	1.4 - 1.7m
Mounting Threads	11 x 5/8"
Material	Aluminium
Adapter	5/8" - 1/4"
Integrated vial on head	



LASER ACCESSORIES

DE0714G

Glasses
For use with green lasers



LASER ACCESSORIES

DE0737

Combi (Cut and fill) Grade Rod

Adjustable Height	2.4m
Spirit Level Bubble Vial	Yes
Sliding Detector Mount	Yes



DE0734 CONSTRUCTION GRADE ROD ALSO AVAILABLE

LASER ACCESSORIES

DE0882

Laser Pole

Adjustable Height	3.4m
Mounting Thread	1/4"



5M ALUMINIUM GRADE ROD

DE0734

Minimum Height	1.2m
Maximum Height	5m
Integrated Vial	Yes
Material Composition	Aluminium, Plastic



LASER ACCESSORIES

DE0733

1/4" Elevated Adjustable Head Tripod (0.97m-2.48m)

Adjustable tilt head	
Mounting Thread	1/4"
Aluminium	
Integrated vial on head	



OTHER LEVELS

DW096PK

Auto Level kit

Horizontal Circle Type	Continuous Drive
Accuracy	2mm
Max. Working Range	100m
Magnification	26x
Stadia Ratio	1:100



Kit contains: Auto Level, Tripod, Grade Rod, String Plumb Bob, Carry Case



HAMMERS

A full range of hammer drills to get the job done. The essential tool for drilling anchors and fixing holes, through holes into concrete, brick, masonry and wood in various sizes. Tools that won't let you down.

www.**DEWALT**.co.uk

22MM 3 MODE SDS PLUS HAMMER DRILL

D25033K

Power Input	710W
Max. Drilling Capacity Concrete	22mm
Max. Drilling Capacity Core Bit	50mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	2.0J
No Load Speed	0 - 1550rpm
Blows Per Minute	0 - 5680bpm
Hand/Arm Vibration – drilling into Concrete	13.6m/s ²
Hand/Arm Vibration – Chiselling	12.5m/s ²
Sound Pressure	87dB(A)
Sound Power	98dB(A)
Category	2kg



AVAILABLE IN 110V & 240V

26MM 3 MODE SDS PLUS HAMMER DRILL

D25133K

Power Input	800W
Max. Drilling Capacity Concrete	26mm
Max. Drilling Capacity Core Bit	50mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	2.6J
No Load Speed	0 - 1500rpm
Blows Per Minute	0 - 5550bpm
Hand/Arm Vibration – drilling into Concrete	15.4m/s ²
Hand/Arm Vibration – Chiselling	14.9m/s ²
Sound Pressure	89dB(A)
Sound Power	100dB(A)
Category	2kg



AVAILABLE IN 110V & 240V

26MM 3 MODE SDS PLUS HAMMER DRILL

D25134K

Power Input	800W
Max. Drilling Capacity Concrete	26mm
Max. Drilling Capacity Core Bit	65mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	2.8J
No Load Speed	0 - 1500rpm
Blows Per Minute	0 - 5540bpm
Hand/Arm Vibration – drilling into Concrete	15.7m/s ²
Hand/Arm Vibration – Chiselling	14.3m/s ²
Sound Pressure	90dB(A)
Sound Power	101dB(A)
Category	2kg



AVAILABLE IN 110V & 240V

30MM 3 MODE SDS PLUS HAMMER DRILL

D25333K

Power Input	950W
Max. Drilling Capacity Core Bit	65mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	3.5J
No Load Speed	0 - 1150rpm
Blows Per Minute	0 - 5200bpm
Hand/Arm Vibration – drilling into Concrete	6.9m/s ²
Hand/Arm Vibration – Chiselling	7.8m/s ²
Sound Pressure	93dB(A)
Sound Power	104dB(A)
Category	3kg



AVAILABLE IN 110V & 240V D25334K - INCLUDES 13MM QUICK CHANGE CHUCK

32MM 4KG SDS-PLUS COMBINATION HAMMER (240V)

D25417KT

Power Input	1000W
Max. Drilling Capacity Concrete	32mm
Max. Drilling Capacity Core Bit	100mm
Max. Drilling Capacity Wood	32mm
Max. Drilling Capacity Metal	13mm
Impact Energy	4.2J
No Load Speed	0-820rpm
Blows Per Minute	0-4700rpm
Hand/Arm Vibration – drilling into Concrete	8.2m/s ²
Hand/Arm Vibration – Chiselling	7.1m/s ²
Sound Pressure	86dB(A)
Sound Power	97dB(A)
Category	4kg



AVAILABLE IN 110V & 240V



45MM 3 MODE SDS MAX COMBINATION DRILL

D25601K

Power Input	1250W
Max. Drilling Capacity Concrete	45mm
Max. Drilling Capacity Core Bit	100mm
Impact Energy	8.0J
No Load Speed	0 - 210/415rpm
Blows Per Minute	0 - 1430/2840bpm
Hand/Arm Vibration – drilling into Concrete	8.8m/s ²
Hand/Arm Vibration – Chiselling	7.2m/s ²
Sound Pressure	94dB(A)
Sound Power	105dB(A)
Category	6kg



AVAILABLE IN 110V & 240V

5KG SDS MAX DEDICATED CHIPPING HAMMER

D25810K

Power Input	1050W
Impact Energy	7.1J
Blows Per Minute	3150bpm
Hand/Arm Vibration – Chiselling	8.5m/s ²
Sound Pressure	94dB(A)
Sound Power	105dB(A)
Category	5kg



AVAILABLE IN 110V & 240V

48MM 8KG SDS MAX COMBINATION HAMMER

D25733K

Power Input	1600W
Max. Drilling Capacity Concrete	48mm
Max. Drilling Capacity Core Bit	125mm
Impact Energy	13.3J
No Load Speed	177-355rpm
Blows Per Minute	1350-2705bpm
Hand/Arm Vibration - hammer drilling into Concrete	9.6m/s ²
Hand/Arm Vibration - Chiselling	9m/s ²
Sound Pressure	98dB(A)
Sound Power	109dB(A)
Category	9kg



AVAILABLE IN 110V & 240V

10KG SDS MAX DEMOLITION HAMMER

D25899K

Power Input	1500W
Impact Energy	17.5J
Blows Per Minute	2040bpm
Hand/Arm Vibration – chiselling into Concrete	12.0m/s ²
Sound Pressure	89dB(A)
Sound Power	100dB(A)
Category	10kg



AVAILABLE IN 110V & 240V

10KG SDS MAX DEMOLITION HAMMER

D25902K

Power Input	1550W
Impact Energy	19.0J
Blows Per Minute	1050/2100bpm
Hand/Arm Vibration – chiselling into Concrete	7.5m/s ²
Sound Pressure	89dB(A)
Sound Power	100dB(A)
Category	10kg



AVAILABLE IN 110V & 240V

12KG SDS MAX DEMOLITION HAMMER

D25951K

Power Input	1600W
Impact Energy	24J
Blows Per Minute	1620bpm
Hand/Arm Vibration – chiselling into Concrete	8.8m/s ²
Sound Pressure	90dB(A)
Sound Power	101dB(A)
Category	13kg



AVAILABLE IN 110V & 240V

30KG PAVEMENT BREAKER

D25981

Power Input	2100W
Impact Energy	62J
Blows Per Minute	960bpm
Hand/Arm Vibration	4.8m/s ²
Tool Holder	28mm HEX
Sound Pressure	94dB(A)
Sound Power	105dB(A)
Category	30kg



ONLY AVAILABLE IN 110V D25981 - TROLLEY FOR D259811

INTEGRATED SDS PLUS DUST EXTRACTOR

D25304DH

Compatible with DCH333, DCH334, D25333, D25334

Max. Drill Bit Diameter	26mm
Max. Drill Bit Length	250mm
Max. Drill Bit Depth	180mm
Washable HEPA filter	99.5% efficiency for dust particles (-0.3 microns)



INTEGRATED HAMMER DRILL DUST EXTRACTOR

D25303DH

Compatible with DCH273

Collar Bit Diameter	54mm
Max. Drill Bit Diameter	16mm
Max. Drill Bit Length	120mm
Max. Drill Bit Depth	105mm
Washable HEPA filter	99.5% efficiency for dust particles (-0.3 microns)



DRILLING DUST EXTRACTION SYSTEM & HOLE CLEANING

DWH050

Capacity	52mm Diameter, Unlimited Depth
Hole Cleaning Nozzles	Included
Flexible Hose	Yes
Compatibility	All professional dust extractors
Interchangeable Drilling Heads	Yes
Soft Bag	Yes



CHISELLING DUST EXTRACTION SYSTEM

DWH051

Connect to any professional dust extractor

Flexible nozzles	x3
Impact resistant	Yes
Compatibility	All DeWALT SDS-Max/19mm HEX combination hammers & breakers. Any DeWALT pointed, flat chisels and bushing tools
Quick release and tool free connection	Yes
Soft Bag	Yes



DEMOLITION HAMMER DUST EXTRACTION

DWH052-XJ

Connect to any professional dust extractor
Capacity accepts any DeWALT pointed, flat chisels and bushing tools up to 32mm wide
Compatibility all DeWALT SDS-Max/19mm HEX combination hammers & breakers. Any DeWALT pointed, flat chisels and bushing tools

Impact resistant	Yes
Quick release and tool free connection	Yes
Soft bag	Yes



SDS PLUS DUST EVACUATOR

DWH079D

Compatible with D25303DH & D25304DH SDS+ Dust Boxes and DWH161D1 Universal Dust Extractor

Eliminates airborne dust when emptying on-board dust box	
AIRLOCK Compatible	Yes



SDS & DUST COLLECTOR SET

DWH201D

Collects dust and debris during drilling
Quick-fit system for easy tool assembly

Max drill bit diameter	25mm
Max drill bit length	250mm
Max drilling depth	129mm



MITRE SAWS & MACHINERY

An extensive range offering revolutionary features like best-in-class accuracy, high cut capacity, integral lighting, dual bevel, and now dual power. With the introduction of ground breaking FLEXVOLT® technology, DEWALT now offers products that were unimaginable to be cordless.

www.DEWALT.co.uk

MITRE SAW RANGE



**18V 184MM
DCS365**

- MAX CAPACITY 250 x 50mm
- WEIGHT 10.5Kg
- Available with 2 x 4.0Ah batteries (M2) and bare unit (N)

**216MM
DWS774**

- MAX CAPACITY 250 x 62mm
- WEIGHT 12Kg
- POWER 1400 WATT

**216MM
DWS777**

- MAX CAPACITY 250 x 62mm
- WEIGHT 14Kg
- POWER 1800 WATT



**54V 216MM
DCS777**

- MAX CAPACITY 270 x 62mm
- WEIGHT 14Kg
- Available with 2 x 6.0Ah batteries (T2) and bare unit (N)

**250MM
DWS778**

- MAX CAPACITY 305 x 85mm
- WEIGHT 17.2Kg
- POWER 1850 WATT



**54V 250MM
DCS778**

- MAX CAPACITY 305 x 85mm
- WEIGHT 17.2Kg
- Available with 2 x 6.0Ah batteries (T2) and bare unit (N)

**250MM
DW717XPS**

- MAX CAPACITY 301 x 58mm / 320 x 76mm
- WEIGHT 23Kg
- POWER 1675 WATT

**2 X 54V 305MM
DWS780**

- MAX CAPACITY 303 x 110mm
- WEIGHT 24.8Kg
- POWER 1675 WATT



**2 X 54V 305MM
DHS780**

- MAX CAPACITY 303 x 110mm
- WEIGHT 25.5Kg
- Available with 2 x 6.0Ah batteries (T2) and bare unit (N)

SECOND FIX

FIRST FIX

216MM MITRE SAW



DWS774

Blade Diameter	216 x 30mm
Power Input	1400W
No Load Speed	4500rpm
Max. Cutting Capacity Width x Height	250 x 62mm
Mitre Capacity	48 / 48°
Bevel Capacity	48°



AVAILABLE IN 110V & 240V

216MM MITRE SAW



DWS777

Blade Diameter	216 x 30mm
Power Input	1800W
No Load Speed	6300rpm
Max. Cutting Capacity Width x Height	270 x 62mm
Mitre Capacity	50 / 50°
Bevel Capacity	48°



AVAILABLE IN 110V AND 240V – 110V IS 1600W

250MM MITRE SAW



DWS778

Blade Diameter	250 x 30mm
Power Input	1850W
No Load Speed	4300rpm
Max. Cutting Capacity Width x Height	305 x 85mm
Mitre Capacity	50 / 50°
Bevel Capacity	48°



AVAILABLE IN 110V AND 240V – 110V IS 1650W, LOAD SPEED OF 4100RPM

250MM DUAL BEVEL MITRE SAW



DW717XPS

Blade Diameter	250 x 30mm
Power Input	1675W
No Load Speed	4000rpm
Max. Cutting Capacity Width x Height	302 x 88mm
Mitre Capacity	50 / 60°
Bevel Capacity	48 / 48°



AVAILABLE IN 110V AND 240V – 110V IS 1650W

305MM DUAL BEVEL MITRE SAW



DWS780

Blade Diameter	305 x 30mm
Power Input	1675W
No Load Speed	1600-3600rpm
Max. Cutting Capacity Width x Height	303 x 110mm
Mitre Capacity	60 / 50°
Bevel Capacity	49 / 49°



AVAILABLE IN 110V AND 240V – 110V IS 1650W



MITRE SAW ATTACHMENTS

Universal Leg Stand	DE7023
Short Beam Universal Leg Stand	DE7033
Heavy Duty Saw Horse	DE7035
Work Support Stop	DE7024
Mounting Bracket	DE7025
Roller Support For DE7023	DE7027
Extension Arm Support For DE7023	DE7028
Increased Width Support Stop For DE7023	DE7029
Large Mitre Bracket For DE7023	DE7030
Extension Support For DE7023	DE7031
Mitre Saw Rolling Stand	DE7260



FLIP OVER SAW ATTACHMENTS

Pair Of Push Sticks	DE3454
Length Stop For Short Work Pieces	DE3460
Clamp Assembly	DE3461
Swivel Stop	DE3462
Single Sliding Table	DE3471
Right Side Extension Table	DE3472
Ripping / Parallel Fence	DE3473
Adjustable Support	DE3474
Pair Of Guide Rods 500mm	DE3491
Pair Of Guide Rods 1000mm	DE3494
Material Support Plate	DE3495
Fence For Bench Mode	DE3496



250MM FLIP OVER SAW

DW743N

Blade Diameter	250 x 30mm
Power Input	2000W
No Load Speed	2850rpm
Max. Cutting Capacity Width x Height Mitre	140 x 68mm
Max. Depth of Cut (Sawbench Position)	70mm, 180(w), 70(d)
Mitre Capacity	45 / 45°
Bevel Capacity	45°



AVAILABLE IN 110V AND 240V – 110V IS 1550W

250MM HEAVY DUTY LIGHTWEIGHT TABLE SAW

DW745

Blade Diameter	250 x 30mm
Power Input	1700W
No Load Speed	4800rpm
Max. Depth of Cut (90°)	77mm
Max. Depth of Cut (45°)	55mm
Max. Ripping Capacity Right/Left	610/315mm
Bevel Capacity	-3 to 48°



AVAILABLE IN 110V AND 240V – 110V IS 1700W

250MM TABLE SAW

DWE7492

Blade Diameter	250 x 30mm
Power Input	2000W
No Load Speed	4800rpm
Max. Depth of Cut (90°)	77mm
Max. Depth of Cut (45°)	55mm
Max. Ripping Capacity Right/Left	825/558mm
Bevel Capacity	45°



AVAILABLE IN 110V & 240V - 110V IS 1700W

TABLE SAW LEG STANDS

Table Saw Rolling Stand	DE7400
Rolling Leg Stand for Table Saws	DWE74911
Scissor Leg Stand for Table Saws	DWE74912
Scissor Leg Stand for DW745	DW745-DE7450



DE7400



DWE74911



DWE74912



DWE7450

PORTABLE THICKNESSER

DW733

Power Input	1800W
No Load Speed	10000rpm
Max. Capacity	317mm
Max. Thicknesser Capacity	152mm
Max. Planing Depth	2mm
Feed Rate	8m/min



AVAILABLE IN 240V

PLANER THICKNESSER

D27300

Power Input	2100W
No Load Speed	6200rpm
Max. Capacity	260mm
Max. Thicknesser Capacity	160mm
Max. Planing Depth	3mm
Feed Rate	5m/min



AVAILABLE IN 240V

300MM RADIAL ARM SAW

DW721KN

Power Input	2000W
Blade Diameter	300 x 30mm
No Load Speed	3000rpm
Max. Cutting Capacity Width x Height	507 x 90mm
Max. Cutting Speed	36m/sec



AVAILABLE IN 240V

350MM RADIAL ARM SAW

DW729KN

Blade Diameter	350 x 30mm
Power Input	4000W
No Load Speed	3000rpm
Max. Cutting Capacity Width x Height	525 x 110mm
Max. Cutting Speed	53m/sec



FULL METAL SAWHORSE - TWIN PACK

DWST1-75676

Width	135mm
Height	1117mm
Depth	120mm
Capacity	900kg



WOODWORKING

With a full range of woodworking tools, DeWALT offers the tool for any project. Focusing on accuracy, performance and portability, we make sure that we have the right products for you.

www.DEWALT.co.uk

OSCILLATING TOOL

DWE315KT

Power Input	300W
No Load Speed	0-22000opm
Accessory Change	Quick Release
Accessories Included	37



AVAILABLE IN 110V & 240V

165MM CIRCULAR SAW

DWE550

Blade Diameter	165 x 20mm
Power Input	1200W
No Load Speed	5500rpm
Max. Depth of Cut (90°)	55mm
Max. Depth of Cut (45°)	35mm
Bevel Capacity	48°



AVAILABLE IN 110V & 240V

184MM CIRCULAR SAW

DWE560

Blade Diameter	184 x 16mm
Power Input	1350W
No Load Speed	5500rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	42mm
Bevel Capacity	48°



AVAILABLE IN 110V & 240V DWE560K - INCLUDES KITBOX AVAILABLE IN 110V & 240V

190MM CIRCULAR SAW

DWE575K

Blade Diameter	190 x 30mm
Power Input	1600W
No Load Speed	5200rpm
Max. Depth of Cut (90°)	67mm
Max. Depth of Cut (45°)	49mm
Bevel Capacity	57°



AVAILABLE IN 110V & 240V

190MM CIRCULAR SAW RAIL COMPATIBLE

DWE576K

Blade Diameter	190 x 30mm
Power Input	1600W
No Load Speed	5200rpm
Max. Depth of Cut (90°) with Rail	61mm
Max. Depth of Cut (45°) with Rail	43mm
Bevel Capacity	57°



AVAILABLE IN 110V & 240V

235MM CIRCULAR SAW

D23700

Blade Diameter	235 x 30mm
Power Input	1750W
No Load Speed	4700rpm
Max. Depth of Cut (90°)	86mm
Max. Depth of Cut (45°)	62mm
Bevel Capacity	45°



AVAILABLE IN 110V & 240V

165MM PLUNGE SAW

DWS520KT

Power Input	1300W
No Load Speed	1750-4000rpm
Blade Diameter	165mm
Blade Bore	20mm
Bevel Capacity	47°
Max. Depth of Cut at 90°	59mm
Max. Depth of Cut at 90° (with guide rails)	55mm
Max. Depth of Cut at 45°	44mm
Max. Depth of Cut at 45° (with guide rails)	40mm
Hand/Arm Vibration	2.8m/s ²
Sound Pressure	92dB(A)
Sound Power	103dB(A)



AVAILABLE IN 110V & 240V

PLUNGE SAW ATTACHMENTS

1m Guide Rail	DWS5021
1.5m Guide Rail	DWS5022
2.6m Guide Rail	DWS5023
Guide Rail Carry Bag For DWS5021 & DWS5022	DWS5025
Pair of Quick Clamps	DWS5026
Replacement Edge Strip	DWS5029
Replacement Low Friction Strip	DWS5030
Router Attachment	DWS5031
Replacement High Friction Strip	DWS5032
Joining Bar	DE6292



DWS5023



DWS5025



DWS5026



DWS5029



DWS5030



DWS5032



DWS5031



DE6292

JIGSAW

DW331K

Power Input	701W
No Load Stroke Rate	0 - 3100spm
Max. Depth of Cut Wood	130mm
Max. Depth of Cut Steel	12mm
Bevel Capacity	45°
Stroke Length	26mm
Max. Depth of Cut (Non Ferrous Metal)	30mm



AVAILABLE IN 110V & 240V

RECIPROCATING SAW

DWE305PK

Power Input	1100W
No Load Stroke Rate	0 - 2800spm
Max. Cutting Capacity Cutting Wood	280mm
Max. Cutting Capacity Steel Section & Pipes	100mm
Max. Cutting Capacity PVC	130mm
Hand/Arm Vibration - cutting Wood	19.5m/s ²
Stroke Length	29mm



AVAILABLE IN 110V & 240V

COMPACT RECIPROCATING SAW

DWE357K

Power Input	1050W
No Load Stroke Rate	0 - 2800spm
Max. Cutting Capacity Wood	280mm
Max. Cutting Capacity Steel Sections & Pipes	100mm
Max. Cutting Capacity PVC	130mm
Stroke Length	29mm
Hand/Arm Vibration - cutting Wood	29m/s ²



AVAILABLE IN 110V & 240V

430MM ALLIGATOR SAW

DWE397

Power Input	1700W
No Load Stroke Rate	3000spm
Stroke Length	40mm
Blade Length	430mm
Blade Stop	0.2sec
Blade	TCT Class 12



DT2976-QZ 430mm Class 20 blade suitable for Poroton and Building Blocks available separately.

AVAILABLE IN 110V & 240V

2.5MM PLANER

DW680K

Power Input	600W
No Load Speed	15000rpm
Max. Depth of Cut	2.5mm
Max. Rebating Depth	12mm
Planer Width	82mm
Shoe Length	285mm
Drum Diameter	54mm



AVAILABLE IN 110V & 240V

4MM PLANER

D26500K

Power Input	1050W
No Load Speed	13500rpm
Max. Depth of Cut	4mm
Max. Rebating Depth	25mm
Planer Width	82mm
Shoe Length	320mm
Drum Diameter	64mm



DE2650 - DUSTBAG FOR D26500K

LAMINATE TRIMMER

DWE6005

Power Input	590W
No Load Speed	16000 - 34000rpm
Cutting Depth	22mm
Collet Size	1/4"
Max. Cutter Diameter	25.4mm



AVAILABLE IN 110V & 240V

1/4" FIXED BASE ROUTER

D26200

Power Input	900W
No Load Speed	16000 - 27000rpm
Max. Cutter Diameter	30mm
Plunge	55mm
Collet Size	1/4"



AVAILABLE IN 110V & 240V

1/4" ROUTER

DW615

Power Input	1000W
No Load Speed	8000 - 24000rpm
Max. Cutter Diameter	30mm
Plunge	55mm
Collet Size	1/4"



AVAILABLE IN 110V & 240V

1/4" ROUTER

D26203

Power Input	900W
No Load Speed	16000 - 27000rpm
Max. Cutter Diameter	30mm
Plunge	55mm
Collet Size	1/4"



AVAILABLE IN 110V & 240V

1/4" TWIN BASE ROUTER

D26204K

Power Input	900W
No Load Speed	16000 - 27000rpm
Max. Cutter Diameter	30mm
Plunge	55mm
Collet Size	1/4"



AVAILABLE IN 110V & 240V

1/2" ROUTER

DW625EK

Power Input	2000W
No Load Speed	8000 - 20000rpm
Max. Cutter Diameter	50mm
Plunge	80mm
Collet Size	1/2"



AVAILABLE IN 110V & 240V

BISCUIT JOINER

DW682K

Power Input	600W
No Load Speed	10000rpm
Max. Cutter Diameter	100mm
Max. Cutting Depth	20mm
Fence Adjustment	0 - 90°



AVAILABLE IN 110V & 240V

DETAIL SANDER

D26430

Power Input	300W
Orbits Per Minute	14,000 - 22,000opm
Orbit Size	1.8mm
Paper Size	93 x 93 x 93mm



AVAILABLE IN 240V

1/4 SHEET PALM SANDER

DWE6411

Power Input	230W
Orbits Per Minute	14,000opm
Orbit Size	1.6mm
Pad Size	108 x 115mm



AVAILABLE IN 110V & 240V

125MM RANDOM ORBIT SANDER

DWE6423

Power Input	280W
Orbits Per Minute	8000 - 12000opm
Orbit Size	2.6mm
Paper Size	125mm
Hand/Arm Vibration	2.5m/s ²
Sound Pressure	80dB(A)
Sound Power	91dB(A)



AVAILABLE IN 110V & 240V

BELT SANDER

DWP352VS

Power Input	1010W
Belt Speed	270 - 440m/min
Belt Size	76.2 x 533mm
Sanding Surface	140 x 75mm
Hand/Arm Vibration	2.7m/s ²
Sound Pressure	92dB(A)
Sound Power	103dB(A)



AVAILABLE IN 110V & 240V 110V - BELT SPEED 235-380M/MIN

HEATGUN

D26411

Power Input	1800W
Operating Temperature	50 - 600°C
Air Flow	250 / 450l/min
LCD Screen	No



AVAILABLE IN 240V

DIGITAL HEATGUN

D26414

Power Input	2000W
Operating Temperature	50 - 600°C
Air Flow	650l/min
LCD Screen	Yes



AVAILABLE IN 110V & 240V



METALWORKING & CONCRETE

Offering durability, ergonomics and power while taking into account the user's health with the Perform & Protect system. All tools are built for maximum toughness against metal and concrete.

115MM ANGLE GRINDER

DWE4206

Power Input	1010W
No Load Speed	11000rpm
Max. Disc Diameter	115mm
Vibration	8.3m/s ²



DWE4206K - INCLUDES KITBOX AVAILABLE IN 110V & 240V

230MM ANGLE GRINDER

DWE490

Power Input	2000W
No Load Speed	6600rpm
Max. Disc Diameter	230mm
Vibration	7.1m/s ²



AVAILABLE IN 240V

230MM ANGLE GRINDER

DWE492K

Power Input	2200W
No Load Speed	6600rpm
Max. Disc Diameter	230mm
Vibration	7.1m/s ²



AVAILABLE IN 110V & 240V



POLISHER

DWP849X

Power Input	1250W
No Load Speed	0 - 600/3500rpm
Max. Disc Diameter	230mm
Vibration	2.3m/s ²



AVAILABLE IN 240V

2300W 355MM ABRASIVE METAL CUTTING CHOP SAW

D28730

Power Input	2300W
No Load Speed	4000rpm
Disc Diameter	355mm
Max. Cutting Capacity Rectangular	115 x 130mm
Max Cutting Capacity at 90° Square	115 x 115mm
Max Cutting Capacity at 90° L-Shaped	137 x 137mm
Max Cutting Capacity at 90° Round	130mm
Max Cutting Capacity at 45° Rectangular	95 x 105mm
Max Cutting Capacity at 45° Square	98 x 98mm
Max Cutting Capacity at 45° L-Shaped	110 x 110mm
Max Cutting Capacity at 45° Round	105mm



AVAILABLE IN 110V & 240V

TCT CHOP SAW

DW872

Power Input	2200W
No Load Speed	1300rpm
Disc Diameter	355mm
Max. Cutting Capacity Square Profile	100 x 100mm
Max Cutting Capacity at 90° Rectangular	75 x 130mm
Max Cutting Capacity at 90° L-Shaped	92 x 92mm
Max Cutting Capacity at 90° Round	130mm
Max Cutting Capacity at 45° Rectangular	79 x 123mm
Max Cutting Capacity at 45° Square	79 x 79mm
Max Cutting Capacity at 45° L-Shaped	56 x 56mm
Max Cutting Capacity at 45° Round	79mm



AVAILABLE IN 110V & 240V

TILE SAW


D24000

Power Input	1600W
No Load Speed	4200rpm
Disc Diameter	250mm
Vibration	<2.5m/s ²
Max. Cutting Capacity	610mm
Max. Depth of Cut	95mm

D240001 Leg Stand also available.



AVAILABLE IN 110V & 240V

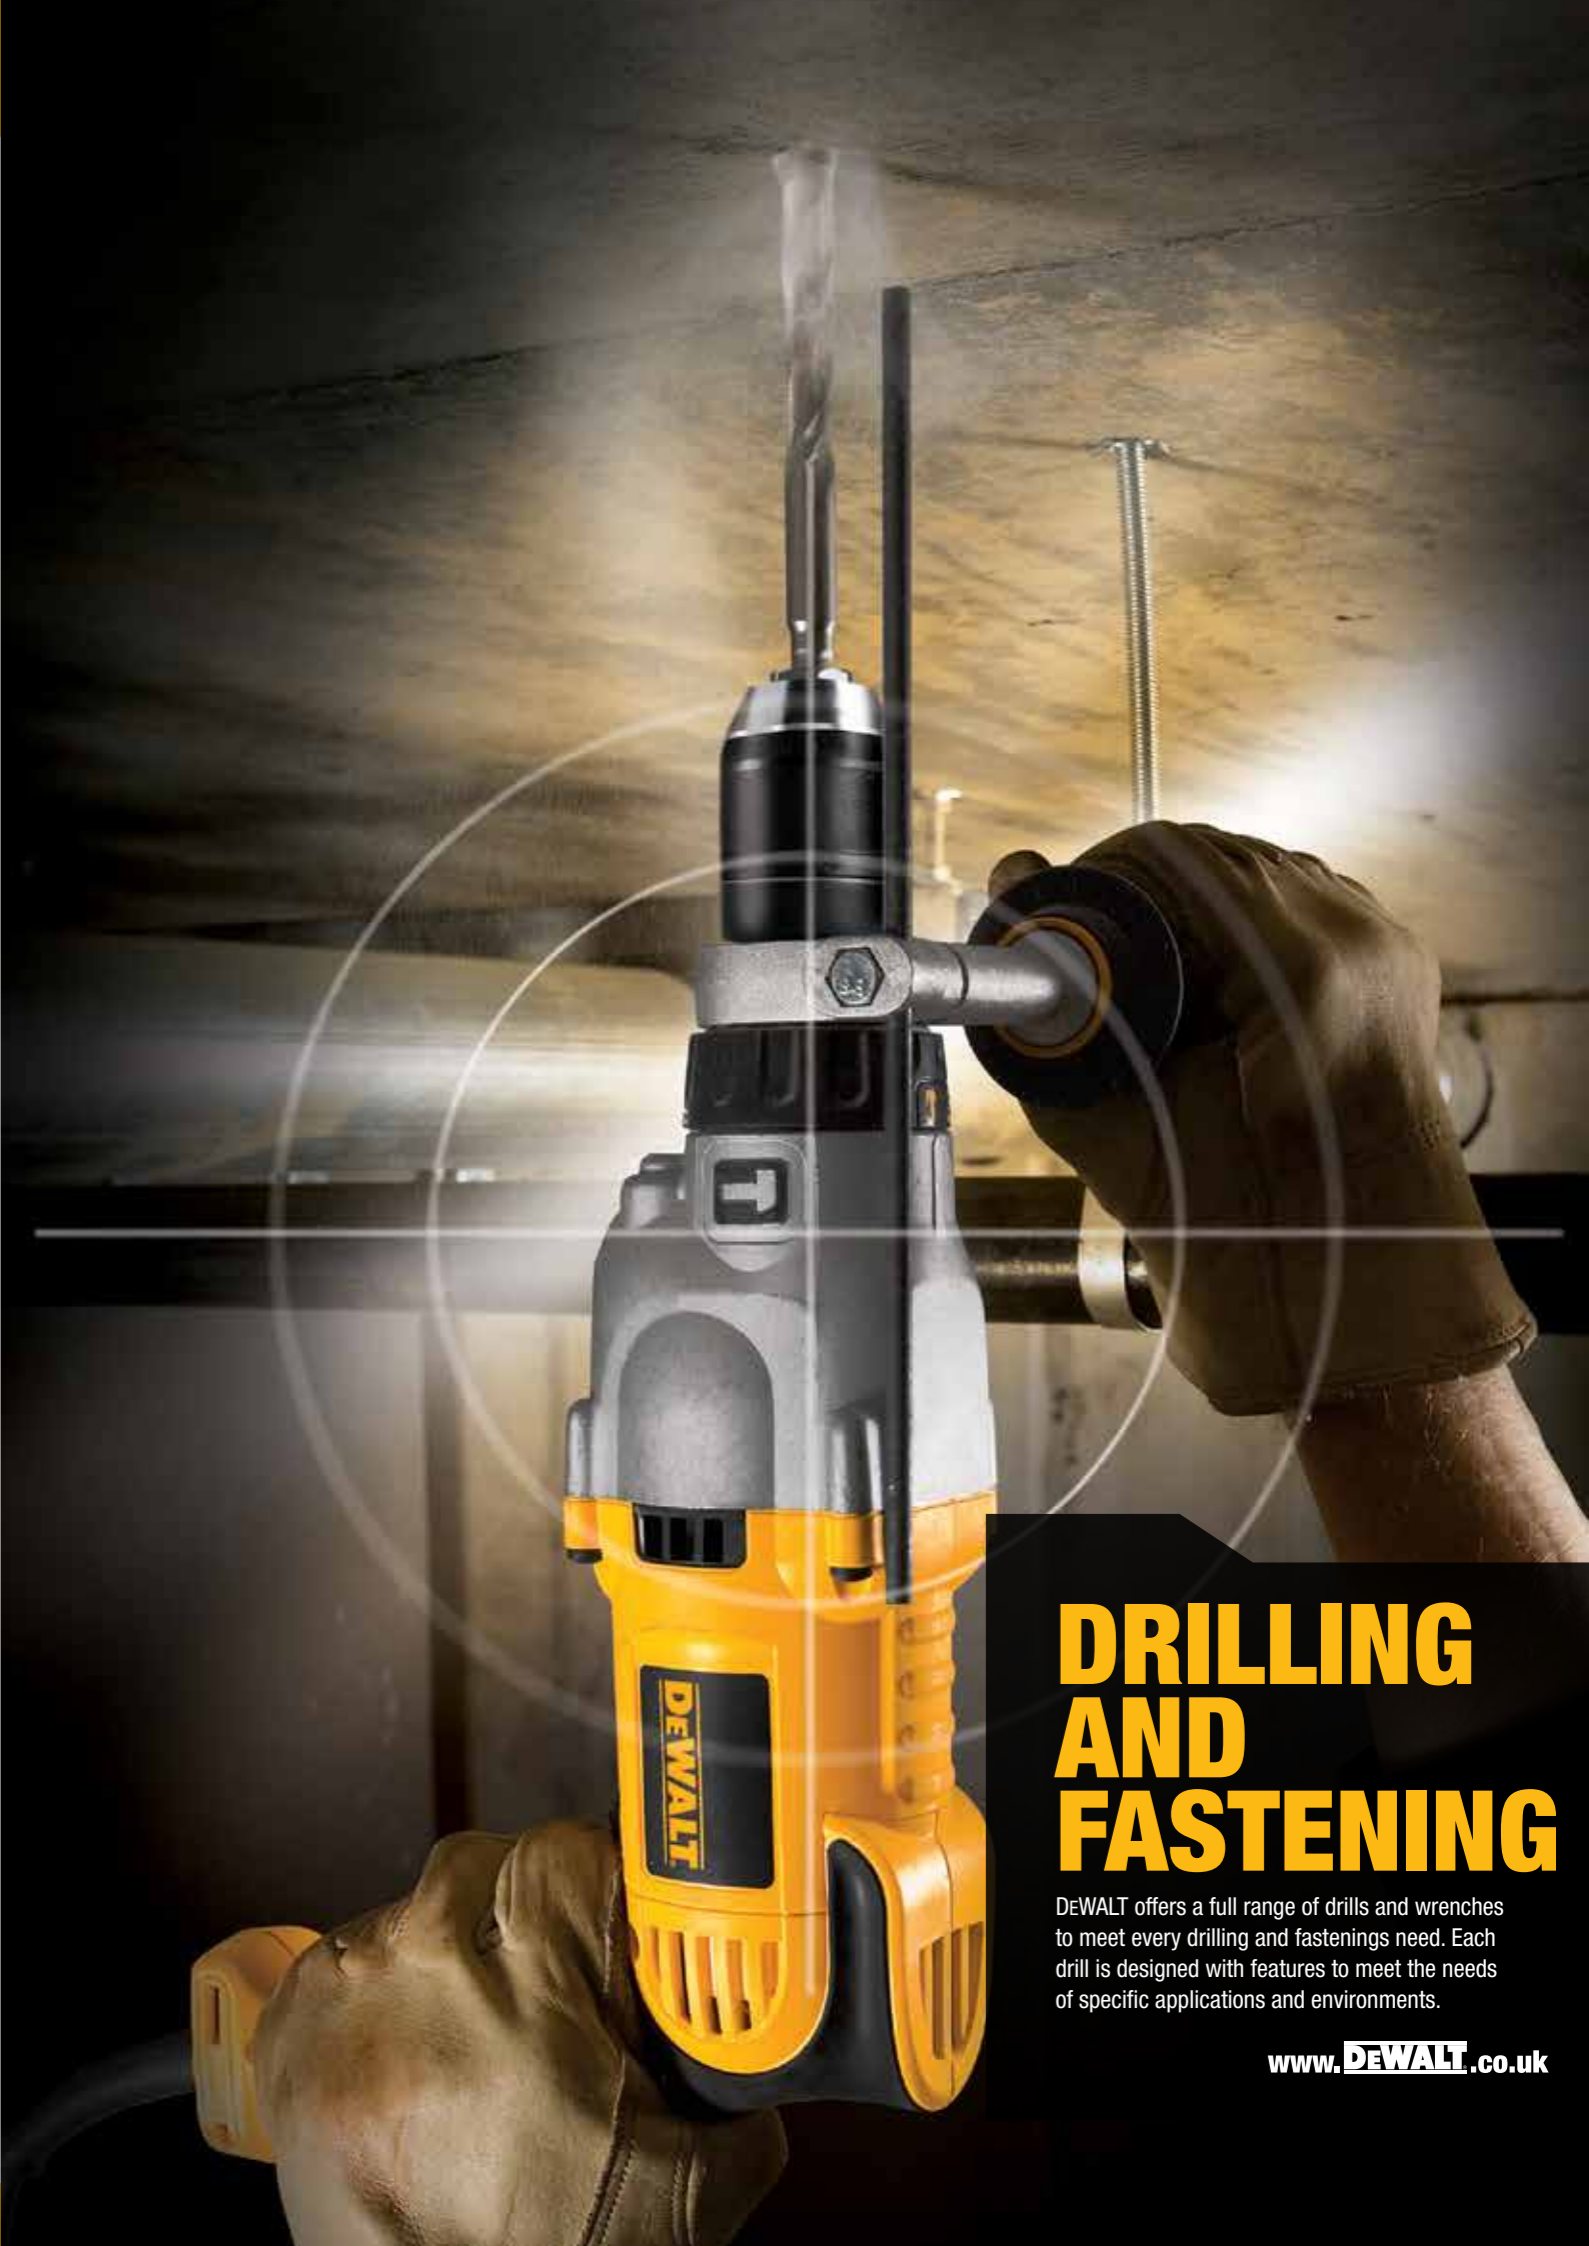

DRILLING AND FASTENING

DEWALT offers a full range of drills and wrenches to meet every drilling and fastenings need. Each drill is designed with features to meet the needs of specific applications and environments.

www.DEWALT.co.uk

PERCUSSION DRILL

DWD024K

Power Input	701W
No Load Speed	0 - 2800rpm
Max. Drilling Capacity Wood	25mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	16mm
Max. Torque	8.6Nm
Blows Per Minute	0 - 47600bpm



AVAILABLE IN 110V & 240V

PERCUSSION DRILL

DWD524KS

Power Input	1100W
No Load Speed	0 - 1250/3500rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	22mm
Max. Torque	40Nm
Blows Per Minute	0 - 56000bpm



AVAILABLE IN 110V & 240V

DIAMOND DRILL

D21570K

Power Input	1300W
No Load Speed	0 - 1250/3500rpm
Max. Drilling Capacity Masonry	127mm



AVAILABLE IN 110V & 240V

DIAMOND DRILL

D21580K

Power Input	1705W
No Load Speed	0 - 1110/2350rpm
Max. Drilling Capacity Masonry	152mm




AVAILABLE IN 110V & 240V D215821-XJ SMALL DRILLING STAND - 53MM COLLAR

IMPACT WRENCH

DW292

Power Input	710W
No Load Speed	0 - 2200rpm
Max. Torque	440Nm
Impacts Per Minute	2700ipm
Tool Holder	1/2"
Max. Bolt Diameter	M20



AVAILABLE IN 110V & 240V

IMPACT WRENCH

DW294

Power Input	710W
No Load Speed	0 - 2200rpm
Max. Torque	440Nm
Impacts Per Minute	2700ipm
Tool Holder	3/4"
Max. Bolt Diameter	M20



AVAILABLE IN 110V



DUST MANAGEMENT Advanced Dust Extraction Solutions.

The Perform & Protect dust certification logo guarantees that the risks of dust inhalation are considerably reduced, to work in a cleaner and more secure environment.

www.DEWALT.co.uk

L-CLASS DUST EXTRACTOR

DWV901L

Power Input	1400W
Max Airflow	68L/Sec (240V) 64L/Sec (110V)
Capacity	30l
Max Power	3000W (240V) 1840W (110V)
Wet/Dry	Yes
IP Rating	IPX4
Sound Pressure	80dB(A)
Sound Power	93dB(A) (240V) 94dB(A) (110V)
Hose Length/Diameter	4.1m/32mm



AVAILABLE IN 110V & 240V

M-CLASS DUST EXTRACTOR

DWV902M

Power Input	1400W
Max Airflow	68L/Sec (240V) 64L/Sec (110V)
Capacity	38l
Max Power	3000W (240V) 1840W (110V)
Wet/Dry	Yes
IP Rating	IPX4
Sound Pressure	75dB(A)
Sound Power	88dB(A)
Hose Length/Diameter	4.1m/32mm



AVAILABLE IN 110V & 240V

DUST EXTRACTOR ACCESSORIES

Replacement Filter for DWV900, DWV901 and DWV902	DWV9340
Disposable Plastic Liner for DWV902M (Pack of 5)	DWV9400
Paper Bag for DWV902M (Pack of 5)	DWV9401
Fleece Bag for DWV902M (Pack of 5)	DWV9402
TSTAK™ Vac Rack Attachment	DWV9500
Safety Specs	D500910



AIRLOCK ATTACHMENTS

Airlock Tapered Adaptor	DWV9110
Airlock Stepped Adaptor	DWV9120
Airlock 35mm Adaptor	DWV9130
Airlock 35mm Angle Adaptor	DWV9150
Airlock Construction Kit	DWV9210
Airlock Woodworking Kit	DWV9220
Floor Cleaning Kit for DWV901L / DWV902M (Airlock)	DWV9350
Airlock Hose Clip	D279058CL



STORAGE

www.DEWALT.co.uk



Storage Solutions That Fit Every Situation.

Site Tough Flexible Storage System ToughSystem™



Unbeatable toughness, performance and protection:

- 4mm thick reinforced polypropylene plastic
- Heavy duty metal latches and metal hinges
- Dust tight and water jet resistant (IP65) to withstand the most severe weather conditions

A Mobile & Modular Storage System TSTAK™



Stack boxes in a variety of configurations:

- Strong, easy to use interlocking system
- Can be configured to your exact requirements
- Features such as metal latches and ball bearing slides provide reliability

Heavy Duty Bags and Pouches Soft Storage



Lightweight, convenient solutions that will stand up to everyday use in a heavy construction environment:

- Pockets compatible with DEWALT Organiser Cups
- 1200 Denier – strong and durable polyester fabric
- Rugged PVC Bottom cover – waterproof & protects from wear and tear
- Double reinforced front pockets

WHY TOUGHSYSTEM™?



Stacks together via side latches & via brackets



STACKING SIDE LATCHES

Allow any TOUGHSYSTEM™ products to be clipped together



SIDE BRACKETS

Brackets securely fix the boxes to the trolley/racking & allow access to each box individually without removing any boxes stored above

Transportation options to make your life easier

Built for the toughest working environments



IP65 RATED
Water & dust seal keep tools safe & dry in the toughest environments



HEAVILY REINFORCED METAL LATCHES
Offering unrivalled durability & product longevity



4.0MM REINFORCED POLYPROPYLENE BODY
Protecting the contents against knocks and drops on site

FROM STORING THE BOXES IN A WORKSHOP, TO CRASH TESTED VAN RACKING SOLUTIONS & TRANSPORTATION AROUND THE JOB SITE TOUGHSYSTEM™ HAS IT COVERED

More than just a storage solution

A System that grows with your tool storage needs

START WITH ONE BOX



ADD OTHER BOXES /MODULES WHEN REQUIRED



ALSO BOASTS A POWERFUL RADIO/CHARGER & COOLER, BOTH SEAMLESSLY INTEGRATE INTO THE TOUGHSYSTEM™ SOLUTION

TOUGHSYSTEM™ ACCESSORIES

DWST1-75694

Trolley	1-70-324
Spare Brackets	1-70-362
Foam Insert For DS150	DWST7-97150



DWST7-97150



1-70-362



DWST1-75694



1-70-324



TOUGHSYSTEM™ RADIO

DWST1-75663

Width	545mm
Height	155mm
Depth	360mm
IP Rating	54
Charges	14.4/18V XR batteries
Speakers	6 inc. 2 sub woofers
Screen	Orange & Black
Output	40W



Bluetooth, DAB+, FM, AM, 3.5mm AUX and USB
Rubber overmould for the toughest jobsites

TOUGHSYSTEM™ ORGANISER

DWST1-75522

Width	543mm
Height	100mm
Depth	350mm
IP Rating	65



TOUGHSYSTEM™ DS150

1-70-321

Width	550mm
Height	158mm
Depth	336mm
IP Rating	65
Weight Capacity	30kg



TOUGHSYSTEM™ DS280

DWST1-75654

Width	558mm
Height	277mm
Depth	330mm
Weight Capacity	20kg



TOUGHSYSTEM™ DS300

1-70-322

Width	550mm
Height	306mm
Depth	366mm
IP Rating	65
Weight Capacity	50kg



TOUGHSYSTEM™ DS400

1-70-323

Width	550mm
Height	408mm
Depth	366mm
IP Rating	65
Weight Capacity	50kg



TOUGHSYSTEM™ DS450

DWST1-75668

Width	480mm
Height	597mm
Depth	990mm
IP Rating	65
Weight Capacity (Box)	40kg
Weight Capacity (used as trolley)	70kg



TOUGHSYSTEM™ KIT

1-70-349

DS150	1-70-321
DS300	1-70-322
DS400	1-70-323
Trolley	1-70-324
IP Rating	65
Width	508mm
Height	1092mm
Depth	660mm
Weight Capacity (used as trolley)	120kg



TOUGHSYSTEM™ DS290 2 DRAWER

DWST1-80123

Width	554mm
Height	340mm



TOUGHSYSTEM™ DS404 COOLER BOX

DWST1-81333

Length	552mm
Width	368mm
Height	483mm
IP Rating	65
Insulation	Commercial grade
Ice Retention	Up to 5 days
Load Capacity	50Kg/25.5L



WORKSHOP RACKING

DWST1-75694

Width	650mm
Height	1800mm
Depth	330mm
Max Load	200kg



No TOUGHSYSTEM™ boxes are included



VAN RACKING SYSTEM - STANDARD/HIGH

DWST1-81042/DWST1-81045

Width	1040mm
Depth	100mm
Height (Standard/High)	1633mm/2143mm
Brackets (Standard/High)	3/4
Max. Load	70kg

Crash Tested Loading:
Crash-tested telescopic metal bars allow height adjustment to fit all types of vans. Reinforced brackets allow 20kg capacity per pair and fold in when not in use to allow for maximum space efficiency. Brackets fit all ToughSystem™ modules.



No TOUGHSYSTEM™ boxes are included

DWST81303-1 SPARE VAN RACKING BRACKETS

WHY TSTAK™?



TSTAK™ MOBILE STORAGE BOX
 A great starter module - a storage box and trolley in one



TSTAK™ CART
 Offering great flexibility when moving boxes on-site



TSTAK™ TROLLEY
 The ultimate option for transport to & from a site

Transportation options to make your life easier

Compatible with DEWALT accessory sets

A System that grows with your tool storage needs




TSTAK™ ACCESSORY SET CADDY

More than just a storage solution

Modular system all stacks together via side latches

ALL THE TSTAK™ MODULES / BOXES CLIP TOGETHER VIA THE SIDE LATCH

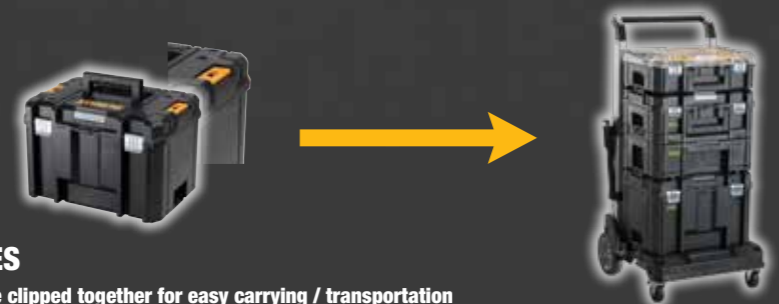

STACKING SIDE LATCHES
 Allows any TSTAK™ products to be clipped together for easy carrying / transportation

TSTAK™ CONNECTED RADIO



TSTAK™ ALSO BOASTS A POWERFUL CONNECTED RADIO/CHARGER, WHICH SEAMLESSLY INTEGRATES INTO THE TSTAK™ SOLUTION

TSTAK™ RADIO

DWST1-81079-GB



Width	465mm
Height	380mm
Depth	165mm
IP Rating	54
Battery Platform	10.8V/18V/54V XR batteries
Speakers	6 inc. 2 sub woofers
Screen	Colour
Output	45W



Bluetooth, DAB+, FM, AM, 3.5mm AUX and Fast Charge USB

TSTAK™ I

DWST1-70704

Width	400mm
Height	331mm
Depth	185mm
Weight Capacity	30kg



TSTAK™ II

DWST1-70703

Width	440mm
Height	331mm
Depth	176mm
Weight Capacity	30kg



TSTAK™ III

DWST1-70705

Width	440mm
Height	314mm
Depth	176mm
Drawer	Yes
Cups	Yes
Weight Capacity	30kg



TSTAK™ IV

DWST1-70706

Width	440mm
Height	314mm
Depth	176mm
Weight Capacity	7.5kg



TSTAK™ V

DWST1-71194

Width	440mm
Height	145mm
Depth	332mm
Weight Capacity	20kg



TSTAK™ VI

DWST1-71195

Width	440mm
Height	301mm
Depth	332mm
Weight Capacity	30kg



TSTAK™ COMBO

DWST1-70702

Width	440mm
Height	331mm
Depth	326mm
TSTAK™ II	DWST1-70703
TSTAK™ IV	DWST1-70706



TSTAK™ TOTE

DWST1-71228

Width	440mm
Height	275mm
Depth	320mm
Weight Capacity	10kg



TSTAK™ DEEP

DWST1-75774

Width	442mm
Height	380mm
Depth	323mm
Weight Capacity	30kg



TSTAK™ MOBILE STORAGE

DWST1-75799

Width	435mm
Height	1000mm
Depth	512mm



TSTAK™ CART

DWST1-71229

Width	486mm
Height	181mm
Depth	436mm
Weight Capacity	100kg



TSTAK™ ACCESSORIES

DWST1-71196

Width	490mm
Height	700mm
Length	285mm
Weight Capacity	100kg



TSTAK™ ACCESSORIES

DWST1-72364

Width	300mm
Length	430mm
TSTAK™ Foam Inlay	DWST1-72364



WHY DEWALT SOFT STORAGE?

DUFFLE BAG TOTE BAG OPEN MOUTH BAG ROUND TOP BAG BACKPACK MULTI PURPOSE



NAIL HAMMER & NAIL HAMMER BELT DRILL HOLSTER FULL TOOL RIG



TOTE BAG

1-79-208

Width	338mm
Height	323mm
Depth	380mm
Weight Capacity	25kg



RIGID OPEN MOUTH BAG

1-79-209

Width	500mm
Height	310mm
Depth	300mm
Weight Capacity	25kg



ROUND TOP BAG

1-79-211

Width	320mm
Height	330mm
Depth	310mm
Weight Capacity	25kg



WHEELED DUFFLE BAG

DWST1-79210

Width	305mm
Height	318mm
Length	699mm
Weight Capacity	25kg



TOOL BACKPACK

DWST81690-1

Width	23mm
Height	470mm
Length	340mm



MULTI PURPOSE

DWST1-75551

Width	270mm
Height	340mm
Depth	120mm



APRON

DWST1-75552

Width	120mm
Height	390mm
Depth	560mm



NAIL POUCH

DWST1-75650

Width	290mm
Height	360mm
Depth	180mm



TOOL BELT

DWST1-75651

Width	1390mm
Height	140mm
Depth	15mm



HAMMER & NAIL POUCH

DWST1-75652

Width	280mm
Height	370mm
Depth	170mm



DRILL HOLSTER

DWST1-75653

Width	170mm
Height	305mm
Depth	45mm



LEATHER BELT

DWST1-75661

Width	1409mm
Height	58mm
Depth	18mm



HAMMER LOOP

DWST1-75662

Width	125mm
Height	140mm
Depth	70mm



YEAR GUARANTEE UPON REGISTRATION
ANNI GARANZIA UPON REGISTRATION
JAHRE GARANTIE UPON REGISTRATION
ANS DE GARANTIE UPON REGISTRATION
XPONIA ERRYHEH UPON REGISTRATION
ANOS GARANTIA UPON REGISTRATION
JAAR GARANTIE UPON REGISTRATION
ANOS GARNTIA UPON REGISTRATION

The DEWALT 3 year guarantee is an extension of the standard 1 year warranty and offers security in case of manufacturing and material defects to DEWALT tools. To be eligible for the extended warranty you must register online within 4 weeks of purchase. Visit <http://MyDEWALT.DEWALT.co.uk/3/> for a full list of products eligible for the extended warranty and to register your tool today.

HOW DOES IT WORK?

1. Log in to MyDEWALT at <http://MyDEWALT.DEWALT.co.uk/3/>. Create an account if you do not already have an existing one.
2. Register your product by entering the Product Model Number found on the rating label on the tool itself, and select an option from the drop-down list. For kits or product bundles, each individual item must be registered separately.
3. Enter the Date Code (which is engraved inside the battery holder or on the underside of the product), followed by the Serial Number (which can be found on the tool's rating label). Finally enter your Reference (SKU) and the purchase location and date, and click 'Confirm'.
4. A summary page will appear, showing that your tool has been successfully registered on the MyDEWALT website. If the extended warranty is available, this will be indicated in green and you will be able to download your Warranty certificate.
5. If you ever need to claim on your extended warranty, you will be required to show your proof of purchase and printed Warranty certificate to your authorised DEWALT dealer prior to repair.



ONLINE SERVICES

www.2helpU.com

- AFTER SALES SOLUTIONS
- LOCATE A SERVICE AGENT
- INSTRUCTION MANUALS
- TECHNICAL SUPPORT
- SPARE PARTS



Visit our DEWALT service site for information on After Sales Services, including:

- Your nearest Authorized Repair Agent
- Frequently Asked Questions
- Technical Drawings
- Our Warranty Policy



You can also email us directly via the 'Ask a question' section.
www.2helpu.com is also available from www.DEWALT.co.uk. Click on the 'Services' tab.



NATIONAL SERVICE CENTRE



At our DEWALT National Service Centre, we repair in excess of 20,000 products per year, and with over 150 years of DEWALT repair experience between our professional team of technicians, we are committed to our promise of 5-star service of quality, convenience and speed.



QUALITY

Our professional team of technicians are aided by state of the art testing equipment, allowing for an accurate and quality repair. This enables us to consistently maintain a high standard. All work is also backed by our best in class 6 month repair warranty.



CONVENIENCE

We offer a collection and delivery service to make the repair process of your DEWALT tool as smooth and seamless as possible for you. Our fantastic Customer Service team will help you through the process, giving you peace of mind that your tool is in safe hands.



SPEED

Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 48 hours. For those smaller, urgent repairs we also provide an additional "while-u-wait" service.



GENUINE PARTS

Every part used in our repairs are genuine DEWALT spares, ensuring both the highest quality and a perfect fit every time. All of our genuine parts have the correct specification, and meet industry standards and regulations, guaranteeing optimum performance.



ONLINE SERVICES

Our Service website www.2helpU.com provides an additional wealth of information, easily accessible 24/7. Features includes FAQs, spare part details, technical information, our warranty policy and guides on recycling used tools.



FOR AFTER SALES SERVICE AND TO LOCATE YOUR NEAREST AUTHORISED SERVICE AGENT PLEASE VISIT:

www.2helpU.com

1-70-321	111	DCB548	16	DCG405P2	31	DCM5713X1	12	DCS391N	36	DE3471	82	DW096PK	68	DWS774	80
1-70-322	111	DCC018N	47	DCG412M2	31	DCM571N	12	DCS397N	11	DE3472	82	DW099S	66	DWS777	80
1-70-323	111	DCC1054N	13	DCG412N	31	DCM571X1	12	DCS397T2	11	DE3473	82	DW292	103	DWS778	80
1-70-349	112	DCC1054T2	13	DCG414N	11	DCM575N	13	DCS491N	41	DE3474	82	DW294	103	DWS780	81
1-79-208	120	DCD240N	13	DCG414T2	11	DCM575X1	13	DCS520NT	7	DE3491	82	DW331K	91	DWST1-70702	118
1-79-209	121	DCD240N	20	DCG426N	32	DCMW564P2	42	DCS520T2	7	DE3494	82	DW615	93	DWST1-70703	116
1-79-211	121	DCD240X2	13	DCG426P2	32	DCMW564RN	42	DCS551N	40	DE3495	82	DW625EK	94	DWST1-70704	116
D21570K	102	DCD470N	14	DCGG571M1	41	DCN660D2	34	DCS570N	36	DE3496	82	DW680K	92	DWST1-70705	117
D21580K	103	DCD701D2	54	DCH253M2	31	DCN660N	34	DCS570P2	36	DE6292	90	DW682K	95	DWST1-70706	117
D215821-XJ	103	DCD710D2	54	DCH253N	31	DCN660P2	34	DCS575N	6	DE7023	82	DW717XPS	81	DWST1-71194	117
D23700	89	DCD716D2	54	DCH254M2	31	DCN680D2	34	DCS575T2	6	DE7024	82	DW721KN	85	DWST1-71195	118
D24000	100	DCD740C1	30	DCH273N	30	DCN680N	34	DCS576N	6	DE7025	82	DW729KN	86	DWST1-71196	119
D25033K	70	DCD740N	30	DCH273P2	30	DCN681D2	34	DCS576T2	6	DE7027	82	DW733	85	DWST1-71228	118
D25133K	70	DCD791P2	27	DCH274P2	30	DCN681N	34	DCS577N	6	DE7028	82	DW743N	83	DWST1-71229	119
D25134K	70	DCD796D2	26	DCH283N	30	DCN682D2	35	DCS577T2	6	DE7029	82	DW745	83	DWST1-72364	119
D25303DH	74	DCD796P2	26	DCH283P2	30	DCN682N	35	DCS690N	8	DE7030	82	DW745-DE7450	84	DWST1-75522	110
D25304DH	74	DCD797D2B	23	DCH333NT	9	DCN6901	33	DCS690X2	8	DE7031	82	DW872	100	DWST1-75551	121
D25333K	71	DCD985M2	26	DCH333X2	9	DCN692N	33	DCS7485N	9	DE7033	82	DWD024K	102	DWST1-75552	121
D25334K	71	DCD991P2	27	DCH334N	10	DCN692P2	33	DCS7485T2	9	DE7035	82	DWD524KS	102	DWST1-75650	122
D25417KT	71	DCD996P2	26	DCH334X2	10	DCN694N	33	DCS777	78	DE7260	82	DWE305PK	91	DWST1-75651	122
D25601K	72	DCD997P2B	23	DCH481N	10	DCN694P2	33	DCS777N	8	DE7400	84	DWE315KT	88	DWST1-75652	122
D25733K	72	DCD997P2B-GB	26	DCH481X2	10	DCN701D2	35	DCS777T2	8	DHS780	79	DWE357K	91	DWST1-75653	122
D25810K	72	DCE040	24	DCH733N	10	DCN701N	35	DCS778	79	DHS780N	9	DWE397	92	DWST1-75654	111
D25899K	73	DCE074D1R	62	DCH733X2	10	DCN8901-XJ	32	DCS778N	8	DHS780T2	9	DWE4206	98	DWST1-75661	122
D25902K	73	DCE079D1G	62	DCH773N	11	DCN8902-XJ	32	DCS778T2	8	DRS18100-XJ	35	DWE4206K	98	DWST1-75662	122
D25951K	73	DCE0825D1G	63	DCH773Y2	11	DCN8903-XJ	32	DCT410D1	57	DT20652-QZ	12	DWE490	98	DWST1-75663	110
D25981	74	DCE088D1G	62	DCK2055T2T	20	DCN8904-XJ	32	DCT410N	57	DT20652-QZ	12	DWE492K	98	DWST1-75668	112
D259811	74	DCE089D1G	63	DCK2056T2T	20	DCN8905-XJ	32	DCT414N	57	DT20652-QZ	42	DWE550	88	DWST1-75676	86
D26200	93	DCE5601	41	DCK2057T2T	20	DCN890N	32	DCV100	43	DT20653-QZ	12	DWE560	88	DWST1-75694	110
D26203	94	DCE580N	41	DCK2062M2T	49	DCN890P2	32	DCV517N	44	DT20653-QZ	12	DWE560K	88	DWST1-75694	113
D26204K	94	DCF601D2	56	DCK2110L2T	58	DCP580N	39	DCV584L	44	DT20654-QZ	12	DWE575K	89	DWST1-75774	118
D26411	96	DCF610D2	56	DCK211D2T	59	DCP580P2	39	DCV5861-XJ	14	DT20654-QZ	12	DWE576K	89	DWST1-75799	119
D26414	96	DCF6201	29	DCK218D2T	58	DCR002	45	DCV586MT2	14	DT20655-QZ	12	DWE6005	93	DWST1-79210	121
D26430	95	DCF620D2K	29	DCK229P2T	50	DCR011	45	DCV586N	14	DT20655-QZ	12	DWE6411	95	DWST1-80123	112
D26500K	92	DCF620N	29	DCK2500P2B	24	DCR020	44	DCV9401-XJ	14	DT20656-QZ	12	DWE6423	96	DWST1-81042	113
D27300	85	DCF620P2K	29	DCK266D2	49	DCS310D2	57	DCV9402-XJ	14	DT20656-QZ	12	DWE74911	84	DWST1-81045	113
D279058CL	106	DCF622N	29	DCK266P2	49	DCS331M2	37	DCW210N	40	DT20656-QZ	42	DWE74912	84	DWST1-81079-GB	116
D28730	99	DCF622P2	29	DCK276P2	50	DCS331N	37	DCW604NT	39	DT20658	12	DWE7492	84	DWST1-81333	113
D500910	106	DCF801D2	55	DCK623P3	52	DCS334N	37	DE0730	67	DT20658-QZ	42	DWH050	75	DWST81303-1	113
DCB090	48	DCF813D2	56	DCK665P3T	51	DCS334P2	37	DE0730G	67	DT20660-QZ	13	DWH051	75	DWST81690-1	121
DCB104	17	DCF815D2	55	DCK694P3	51	DCS335N	37	DE0733	68	DT20661-QZ	13	DWH052-XJ	75	DWV901L	106
DCB115	48	DCF880M2	28	DCL040	45	DCS350N	40	DE0734	68	DT20662-QZ	13	DWH079D	76	DWV902M	106
DCB118	17	DCF880N	28	DCL043	46	DCS355D2	39	DE0735	67	DT20662-QZ	43	DWH201D	76	DWV9110	106
DCB119	48	DCF887D2	27	DCL050	46	DCS355M2	39	DE0736	67	DT20663-QZ	13	DWP352VS	96	DWV9120	106
DCB124-XJ	59	DCF887N	27	DCL060	46	DCS355N	39	DE0737	68	DT20664-QZ	13	DWP849X	99	DWV9130	106
DCB132	17	DCF887P2	27	DCL079	47	DCS365	78	DE0741G	67	DT20665-QZ	43	DWS5021	90	DWV9150	106
DCB182	47	DCF888D2B	25	DCL510N	59	DCS365M2	35	DE0772	65	DT20666-QZ	43	DWS5022	90	DWV9210	106
DCB183	48	DCF894N	28	DCM561P1S	42	DCS365N	35	DE0881T-XJ	67	DT20676-QZ	43	DWS5023	90	DWV9220	106
DCB183B	22	DCF894P2	28	DCM561PBS	42	DCS367N	38	DE0882	68	DW03050	66	DWS5025	90	DWV9340	106
DCB184	47	DCF897N	29	DCM562P1	42	DCS371N	38	DE0892	64	DW03101	66	DWS5026	90	DWV9350	106
DCB184B	22	DCF899HN	28	DCM562PB	42	DCS373N	36	DE0892G	64	DW033	65	DWS5029	90	DWV9390	39
DCB189	48	DCF899N	28	DCM563P1	43	DCS380M2	38	DE2650	92	DW083K	65	DWS5030	90	DWV9400	106
DCB500-GB	15	DCF899P2	28	DCM563PB	43	DCS380N	38	DE3454	82	DW088CG	63	DWS5031	90	DWV9401	106
DCB500-LX	15	DCF902D2	55	DCM565N	43	DCS388N	7	DE3460	82	DW088K	63	DWS5032	90	DWV9402	106
DCB546	15	DCG405FN	31	DCM565P1	43	DCS388T2	7	DE3461	82	DW088KD	63	DWS5100-XJ	7	DWV9500	106
DCB547	15	DCG405N	31	DCM5713N	12	DCS391M2	36	DE3462	82	DW089K	64	DWS520KT	90		



These conditions are written mainly in plain English. In these conditions "we" means Stanley Black & Decker UK Limited or Stanley Black and Decker Ireland, subsidiaries of Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland, and "you" means the person who accepts a quotation for the sale of the goods and whose order for the goods is accepted by Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland.

CATALOGUE ITEMS

1. Quotations and Orders
 - a) All quotations are made and orders accepted under the following conditions. We must give written agreement to new or altered conditions. All orders accepted by us are under these conditions and not your conditions.
 - b) Orders must be for boxes or cartons of items. We can vary order quantities to meet this condition.
 - c) You cannot return any goods unless you have our permission, and only with an approved Returns Material Authority number.
 - d) Each order will be delivered to one address. We will only deliver to your address and not a third party.
 - e) Once we have processed an order you cannot cancel or change it. As we continuously improve our products we can alter specifications without telling you and in these circumstances you have no right to cancel any order to claim damages. Made to order goods cannot be cancelled under any circumstances once the order has been accepted.
 - f) The price we charge you for the goods is the price of them on the date of your order. We will add V.A.T. to our prices at the proper rate on the date we send the goods.
 - g) Any goods shall be sold subject only to these terms and conditions and, for the avoidance of doubt, shall not be sold upon any sale or return basis.
2. Delivery
 - a) We will try to meet all delivery dates, but we are not legally liable for any delay in delivering or any losses caused by a delay. Time shall not be of the essence for delivery.
 - b) Standard terms of delivery are DAP (Delivered at Place) unless otherwise stated.
 - c) Unless we agree otherwise we will deliver goods by our standard delivery service choosing the most convenient and economical method available at the time of delivery. We will only make deliveries by other means if you ask us to and you pay.
 - d) We will deliver and collect goods in normal working hours unless we have agreed otherwise. If this is inconvenient and you ask us to deliver or collect goods at a different time there will be a charge.
 - e) Carriage charges are paid on all orders of a minimum net value. No orders, apart from spare parts will be accepted below this value.
3. Risk of Loss
 - a) Once the goods have been delivered to your premises you are responsible for any loss or damage caused to the goods after you have received them.
 - b) You must examine the goods immediately when they are delivered and tell us about any damage to, or shortages of, boxes and / or cartons within two working days. If the contents of any cartons are missing or damaged you should tell us within fifteen working days of the date of the invoice. When the goods are delivered you must also write details of any visible damage to the goods on the carrier's delivery sheet.
4. Accepting Goods

We will assume you have accepted the goods fifteen business days after they have been delivered unless you tell us about any complaints within that period. Also, if you, your agents, employees or licensees have used the goods, we will count this as accepting the goods.
5. Guarantees
 - a) We only guarantee that when we deliver the goods they will not be damaged or have any faults. We are not liable for fair wear and tear.
 - b) If you think that the goods are faulty you should tell us and wait for an instruction to either return the goods to a place we tell you or keep the goods for us to inspect. If we accept that there is a fault we will either repair or replace the faulty part or parts or refund the original price of the goods.
 - c) The situation described in 5 (b) above shall not apply to the following:
 - 1) any goods which have been repaired or altered by somebody who isn't an employee of ours.
 - 2) goods which have been mixed with other goods or used to create other products.
 - 3) any goods which, in our opinion, have been subject to any accident or to damage or which have been improperly stored, maintained or used.
 - d) We are not liable for the following:
 - 1) any direct loss or damage except the liabilities we have already mentioned.
 - 2) any indirect, consequential or incidental loss or damage of any kind (including loss of profits, revenue or contracts) or for any damage to or destruction of any property.
 - 3) injury to, or the death of, any person unless that injury or death is caused by our carelessness or that of our employees.
 - e) Our only guarantees, conditions and liabilities are those given in this document.
 - f) You must indemnify us against all claims, actions, costs, losses, damages or expenses caused by or in connection with the goods unless we are liable under these conditions.
 - g) If we repair or replace any goods under 5(b) we will take the date that the repair is finished or the goods are replaced to be the date on which the goods were delivered.
6. 'Force Majeure'

Without prejudice to any other terms of this agreement we are not liable for any act or omission or if we do not enforce, or we delay enforcing any condition in this Agreement because of any circumstances or causes beyond our control.
7. Payment
 - a) Payment is due at the end of the following month from the date of Invoice unless otherwise advised.
 - b) If you delay paying for no good reason we may choose to suspend all deliveries to you until we have received all payments which are due.
 - c) If you do not pay within our terms we reserve the right to charge interest in accordance with the provisions and rates provided in The Late Payment of Commercial Debts (Interest) Act 1998.

- d) If you disagree with an invoice you must tell us about this within 7 days of receiving the goods, and that if our investigation confirms that your query is justified you do not need to pay for the amounts disputed on the invoice or any interest due.
8. Owning the Goods

Ownership and title to the Goods shall remain with Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland until

 - a) You have paid in full for the goods.
 - b) You have made full payment for any other goods or products supplied under any contracts or on any account whatsoever between Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland and all other sums whatever due from you to Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland have been paid in full.
 - c) If you pay by cheque, bill of exchange or promissory note, we own the property until the same has been honoured. We may apply any payments you make to any of your invoices which we see fit.
 - d) Until you have paid for the goods you will be acting as our fiduciary agent and bailee. You must keep records of the goods and store the goods in a way that makes them clearly identifiable as being our property. These goods should be insured by you or as part of your general insurance cover. We will assume that any goods you have which we supplied belong to us (unless you can prove otherwise)
 - e) If you:
 - 1) make any arrangement with your creditors;
 - 2) go into liquidation;
 - 3) appoint a receiver to manage all or part of your assets;
 - 4) fail to make payment for the goods; or
 - 5) cannot, in our opinion pay your debts; then, we have the following rights:
 - 1) to enter any property and repossess the goods without giving you notice.
 - 2) to give you written notice that you must not sell or get rid of the goods until we have received full payment for them.
 - 3) to cancel any undelivered goods and stop any goods that are being transported to you.
 - f) At any time we may give you the ownership of the goods if we give you notice of our intention to do so. Under condition 8 (c) ownership of the goods will pass to you when you sell or get rid of goods which we own immediately before you sold or got rid of them.
 - g) We may sue you for the price of the goods when the payment is due even though the ownership of the goods may not have passed to you.
 - h) In any circumstances prevailing under clause 8e) (1)-(5) then we shall in respect of any rebate arrangement with you exercise our unfettered right to offset any sums due from you against any amount on our accounts receivable ledger by way of credit note under any rebate arrangement, in full or part satisfaction of any sum due to the Company by you.
 - i) In respect of clause 8h) you the Customer undertake to keep us informed upon written 14 day notice of any event or circumstance that places your business in a precarious financial position which may lead to an administration order bankruptcy or liquidation and we undertake to provide you with written 7 day notice of our intention to exercise our rights by way of right of offset.
9. We may impose restrictions on the reselling of goods, subject to U.K. and E.E.C. trading laws.
10. If any condition or part of condition in this Agreement is not valid or cannot be enforced this will not affect any part of the condition or Agreement.
11. If the ownership of your company changes we will automatically cancel this Agreement and negotiate a new one.
12. These conditions of sale only apply to your company and your own branch companies which carry out similar trade. They are not offered to your associate companies, either within or outside its trade unless we agreed this when we were negotiating this Agreement.
13. You shall and shall procure that your officers, employees, agents, sub-contractors and any other persons who perform services for or on behalf of you in connection with this Agreement shall:
 - a) not commit any act or omission which causes or could cause it or Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland to breach or commit an offence under any laws relating to anti-bribery or anti-corruption;
 - b) comply with Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland anti-corruption policy as updated from time to time, a current copy of which is available upon request;
 - c) keep accurate and up to date records showing all payments made and received and all other advantages given and received by it in connection with this Agreement and the steps it takes to comply with this condition and permit Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland to inspect those records as required.
 - d) promptly notify Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland of any request or demand for any financial or other advantage received by it; and any financial or other advantage it gives or intends to give whether directly or indirectly in connection with this Agreement; and
 - e) promptly notify Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland of any breach of this condition. Stanley Black & Decker UK Limited or Stanley Black & Decker Ireland may terminate this Agreement immediately by giving notice to that effect to you if you are in breach of condition 13.

Governing Law
 This Agreement, for all purposes, is governed and construed by the laws of England and Wales and both parties agree to submit to the exclusive jurisdiction of the Courts of England and Wales.

Unless we have agreed otherwise in writing, our standard conditions of sale also apply.



DEWALT UK®
210 Bath Road, Slough,
Berkshire SL1 3YD
Customer Service Phone:
01753 567055
Fax: 01753 572112

dewalt.com

 dewaltuk

 @dewalt_uk

 dewalt

 dewalttoolsuk

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent.

To the best of our knowledge, all descriptions and illustrations contained in this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification.

© DEWALT® 2019.

