



T16504



Contact Us

To receive more information on **Dulux Trade** products register online at duluxtrade.co.uk

You can also request information, technical advice and help with product specification by calling **0333 222 7070**
Email: duluxtrade.advice@akzonobel.com

Or write to: **Trade Technical Advice Centre, AkzoNobel, Wexham Road, Slough SL2 5DS**

Interact with **Dulux Trade**



#Courses are free for members of the **Dulux Select Decorators** scheme to attend, for other painters and decorators a fee may apply, please see website for details. Specialist courses will also be made available and fees will apply.

†Fees can be paid annually or in monthly instalments. Prices are correct at time of publication, this is subject to change. Monthly direct debits are subject to an administration fee.

*This figure is based on theoretical calculations on pairs of bare rooms of dimensions 4x3x2.4m where the light incident on all surfaces is averaged. The rooms all have the same mid-grey floor colour (LRV 50). They have a white ceiling and a colour on the walls. In one of each pair, the colour used is from the **Light & Space** range. In the other, the colour used is from conventional products. The **Light & Space** and conventional colours have similar hue (colour family) and chroma (intensity of colour). The energy savings will not always equate to 22%. They will vary depending on the contents, dimensions and floor colour of the room and will differ if lighting in particular areas needs to be controlled. The calculated figure varies from 14% to 28% depending on the wall colour chosen. The actual light energy savings achieved in practice may differ from the calculations.

‡Compared with **Dulux Trade Vinyl Matt 2011** formulation.

**Whilst leading-edge technology has been used in the development of this product, the nature of solvent-based paints means that they will discolour over time. The rate of discolouration is faster in areas with no or low natural or UV light.

*****Dulux Trade Mouldshield** Fungicidal Eggshell and **Dulux Trade Mouldshield** Fungicidal Matt contain 3-iodo-2-propynyl-n-butylcarbanate. **Dulux Trade Aquatech** Preservative Basecoat[®] and **Dulux Trade Weathershield** Preservative Primer[®] contain propiconazole and IPBC. USE BIOCIDES SAFELY. ALWAYS READ THE LABEL AND PRODUCT INFORMATION BEFORE USE.

AkzoNobel, the AkzoNobel logo, the flourish logo, Dulux, Dulux Trade, Brighter Futures, Dulux Trade Contract Partnership, Dulux Select Decorators, Ecosure, Weathershield, Weathershield All Seasons, Aquatech, Polycell, Polycell Trade, Polyfilla, Woodflex Polyfilla, Metalshield, Sterishield, Mouldshield, Dulux Dry Fall, Cladshield, Pyroshield, Floorshield, Diamond Glaze, Light & Space, Lumitec, Planet Possible and Dulux Trade Colour Palette are trade marks of the AkzoNobel group. © AkzoNobel 2015.



DE_01118_270515

BRIGHTER FUTURES >

PROFESSIONAL PRODUCT GUIDE



AkzoNobel

BRIGHTER FUTURES START WITH DULUX TRADE

When you choose to use **Dulux Trade**, it's not just about choosing high quality paints and varnishes which you can trust to give you the finish you deserve, but it is also a ripple effect of better things, that help to create **Brighter Futures** for you, your customers and the decorating industry.

BRIGHTER PLACES

Our innovative products and beautiful colour ranges help you to create desirable living spaces for all to enjoy and flourish in.

BRIGHTER BUSINESS

Our tools and services such as the **Dulux Trade** website and **Dulux Trade** Paint Expert app support you and your business so you always have the edge.

BRIGHTER SKILLS

We help decorating professionals get ahead in the industry, through training via our elite networks **Dulux Select Decorators** and **Dulux Trade Contract Partnership**.

BRIGHTER PLANET

We work with our customers to reduce waste and do more with the resources we have, so together we can create a better future for our planet.



“ From experience
it's reliable...
you can guarantee
the covering ”

Nigel Cluskey
Professional Decorator













PRODUCT AREAS

Primers	6
Walls and Ceilings	16
Trim Products	24
Exterior Products	34
Specialist Products	44
Woodcare	56
Pre-decorative	66

ADDITIONAL INFORMATION

Services	76
Quick Reference Guide	78

SYMBOLS EXPLAINED

	Roller		Tube		Cartridge
	Conventional Spray		Knife		Skimming Knife
	Brush		Airless Spray		Aerosol
	Recently Updated Product		New Product		Light & Space

PLEASE NOTE: All quoted touch dry times and recoat times are dependent upon temperature and humidity. Exterior masonry paint coverage figures are only an approximate guide due to the variation of different building surfaces and may be reduced.

DOING MORE WITH LESS AND DEVELOPING LOWER ENVIRONMENTAL IMPACT PRODUCTS

At **Dulux Trade** we're committed to **Planet Possible**. That's what we call the global **AkzoNobel** initiative to create a better future by delivering more value from fewer resources.

PRACTICAL SUSTAINABILITY

Planet Possible is designed to drive innovation and promote the efficient use of resources, allowing us all to reach our sustainability goals together. At **Dulux Trade**, we offer positive sustainable solutions, as well as reducing the environmental impact of our products.



"As a brand leader we have a critical role to play in reducing the environmental footprint associated with the use of our products and delivering innovations that allow our customers to work more sustainably"

Susan Kendall
Sustainability Director,
AkzoNobel Decorative Paints
UK & Ireland

Water-based is the future

Replacing solvent-based paints with water-based is just one of the ways we're providing our customers with more sustainable solutions. It's a breath of fresh air for everyone.

Less is more

We're working hard to make longer lasting, lower maintenance finishes, so less paint is needed on the job and redecorating happens less often.

Brighter lives

Planet Possible is also about making people's lives brighter. All over the world we create colourful communities through our **Let's Colour** projects, and we work to unlock the potential of the next generation.

Planet possible symbols explained

Helping everyone reach their sustainability goals

We have used the following symbols to help you quickly identify our products which will help you achieve your sustainability goals.

Chemical Resistant	Water-Based	Durability	Flame Retardant
Quick Drying	Lower Embodied Carbon	Extra Durability	Anti-bacterial

Want to find out more? Check out duluxtrade.co.uk/pp

PRIMERS

Dulux Trade Primers offer the highest quality products to solve all your decorating problems, so you can achieve a truly professional, long-lasting finish.

Wood Products

	Place of application – Interior and Exterior Wood Surfaces					Recoatable	Water/ Solvent-based
	Hardwoods	Softwoods	Resinous Woods	Creosote/Bitumen Coated Wood	MDF		
Quick Dry Wood Primer Undercoat	✓	✓				2-4 hours	Water-based
Wood Primer	✓	✓				16-24 hours	Solvent-based
Aluminium Wood Primer			✓	✓		16-24/48 hours	Solvent-based
Quick Dry MDF Primer Undercoat					✓	2 hours	Water-based
All Purpose Primer	✓	✓				6 hours	Solvent-based

Metal Products

Metal Products	Place of application – Interior and Exterior Metal Surfaces								Recoatable	Water/ Solvent-based
	Iron		Steel		Other Non-Ferrous Metals		Galvanised Steel			
	Weathered but clean	New	Weathered but clean	New	Weathered but clean	New	Weathered	New		
Metalshield Quick Dry Metal Primer					✓	✓	✓	✓	4-6 hours	Water-based
Metalshield Zinc Phosphate Primer	✓	✓	✓	✓			✓	✓	3 hours	Solvent-based
Mordant Solution								✓	Within 48 hours	Water-based
All Purpose Primer	✓	✓	✓	✓	✓	✓	✓		6 hours	Solvent-based

Walls and Ceilings Products

	Place of application – Interior Wall and Ceiling Surfaces					Recoatable	Water/ Solvent-based
	New & bare plaster	Limewash	Distemper	Masonry	Problem surfaces e.g. ceramic tiles		
Alkali Resisting Primer	✓			✓		16-24 hours	Solvent-based
Drywall Primer Sealer	✓					2-4 hours	Water-based
Stain Block Primer		✓	✓	✓		6-8 hours	Water-based
Super Grip Primer					✓	4-8 hours	Water-based
Ultra Grip Primer					✓	16 hours	Water-based
All Purpose Primer	✓			✓		6 hours	Solvent-based

Dulux Trade
Quick Dry Wood Primer Undercoat

A quick drying dual-purpose primer undercoat suitable for interior and exterior use

WATER-BASED

DATA SHEET 202



Key Benefits

Primes and undercoats in one. For soft and hardwoods. Provides excellent adhesion

Water-Based

Quick Drying



Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour, dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 13m ² per litre on most surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used with the **Dulux Trade** range of quick drying water-based finishes to offer a complete water-based system

Dulux Trade
Aluminium Wood Primer

An aluminium pigmented primer for use on all types of wood and aged creosoted or bitumen coated surfaces

SOLVENT-BASED

DATA SHEET 204



Key Benefits

For outstanding sealing properties. For resinous and creosoted wood



Colour range	Silver
Pack sizes	1L, 2.5L, 5L
Touch dry	3-4 hours
Recoatable	After 16-24 hours. Allow 48 hours between coats for aged creosoted or bitumen coated surfaces
Coverage	Up to 17m ² per litre on most surfaces
Thinning	This product should not be thinned

- For interior and exterior use on wood or surfaces that are liable to bleed through a newly applied paint system
- An ideal primer for use on fire damaged wood after thorough washing down
- Can be used as a first coat when using **Dulux Trade** Aluminium Paint

Dulux Trade
Wood Primer

A general purpose solvent-based primer for use on interior and exterior wood

SOLVENT-BASED

DATA SHEET 201



Key Benefits

Seals the surface to provide excellent adhesion. For softwoods and hardwoods



Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 15m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

Dulux Trade
Quick Dry MDF Primer Undercoat

Dual purpose primer and undercoat

WATER-BASED

DATA SHEET 205



Key Benefits

Interior & exterior use. Primes and undercoats in one. For MDF surfaces

Water-Based

Quick Drying



Colour range	White
Pack sizes	2.5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2 hours
Coverage	Up to 13m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For interior and exterior use
- Low odour
- Primes and undercoats in one

Dulux Trade Metalshield Quick Dry Metal Primer

WATER-BASED
DATA SHEET 510

For interior and exterior use on new bright or weathered galvanized metal



Key Benefits

8 year protection*. For non ferrous metal.
Provides excellent adhesion

Water-Based

Quick Drying



Colour range	White
Pack sizes	1L, 5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 18m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- No pre-treatment required for new surfaces
- Ensure all surfaces are sound, dry and free from grease, wax and oil
- Not recommended for use on heated surfaces, at temperatures below 10°C or in areas of high humidity or condensation

*Applying our straight-forward, single pack system – an appropriate **Metalshield** Primer plus 2 coats of **Metalshield** Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade Mordant Solution

WATER-BASED
DATA SHEET 509

Chemically etches the surface of new, bright galvanized metal to provide adhesion for subsequent paint systems



Key Benefits

For preparation of new galvanized metal.
Chemically etches and prepares surfaces



Colour range	Blue/Green
Pack sizes	2.5L
Recoatable	Pre-treated surface should be overcoated with appropriate Dulux Trade metal primer within 48 hours

Dulux Trade Metalshield Zinc Phosphate Primer

SOLVENT-BASED
DATA SHEET 511

High performance, high build primer with excellent rust inhibiting performance, suitable for interior and exterior use



Key Benefits

8 year protection*. For ferrous metal.
Provides excellent corrosion resistance



Colour range	Buff
Pack sizes	1L, 5L
Touch dry	2-3 hours
Recoatable	3 hours
Coverage	Up to 7m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- High build protection: 50-65 microns dry film thickness
- Can be used on heated surfaces up to 90°C
- Suitable for use over hand cleaned iron and steel, blast clean surfaces, weathered or pre-treated galvanized steel

*Applying our straight-forward, single pack system – an appropriate **Metalshield** Primer plus 2 coats of **Metalshield** Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade All Purpose Primer

SOLVENT-BASED
DATA SHEET 303

A general purpose primer for interior and exterior use on most wood, metal and plaster surfaces



Key Benefits

For wood, metal and masonry.
Provides good adhesion



Colour range	Grey
Pack sizes	1L, 2.5L
Touch dry	6 hours
Recoatable	After 6 hours
Coverage	Wood: up to 8m ² per litre. Metal: up to 11m ² per litre. Plaster: up to 7m ² per litre
Thinning	Thinning not generally required

- Penetrates bare wood to protect and seal
- Contains a rust inhibitor to protect metal surfaces against corrosion

Dulux Trade
Alkali Resisting Primer

SOLVENT-BASED

DATA SHEET 301

For use on interior and exterior masonry surfaces that may contain alkalis



Key Benefits

For plaster and masonry surfaces. Seals fresh, alkaline surfaces. Blocks stains such as nicotine and fire damage



Colour range	Off White
Pack sizes	1L, 5L
Touch dry	8-12 hours
Recoatable	16-24 hours
Coverage	Up to 9m ² per litre on most surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Seals tobacco stains and smoke damage
- Can be used as a primer on new, dry, interior plaster and masonry
- Holds back tobacco tar stains or smoke damage after thorough cleaning

Dulux Trade
Stain Block Primer

WATER-BASED

DATA SHEET 307

A 2-in-1 problem solving primer that seals and binds surfaces and blocks common stains



Key Benefits

For interior walls and ceilings. For water damage and other light, common stains



Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	After 6-12 hours. Note – this product can usually be recoated within 6-8 hours – but on very porous surfaces a longer drying time may be required
Coverage	Up to 14m ² per litre. 2 coats may be required on severely stained surfaces
Thinning	This product should not be thinned

- Effective treatment for stains caused by water-based and solvent-based inks, crayon, biro, coffee, scuff marks, water and nicotine

Dulux Trade
Drywall Primer Sealer

WATER-BASED

DATA SHEET 548

A high quality, water-based wall paint primer sealer



Key Benefits

Seals the surface to help even out surface porosity on drywall and promote a good opacity finish



Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 15m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Ideal for new plaster boards

Dulux Trade
Super Grip Primer

WATER-BASED

DATA SHEET 309

An adhesion promoting primer for interior and exterior use



Key Benefits

Provides good adhesion on problem surfaces. For surfaces such as ceramic tiles, laminates and glass



Colour range	White
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent upon temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 18m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on surfaces such as ceramic tiles, melamine, glass, anodised aluminium, aged gloss paint, stove enamel and powder-coated metal

PRIMERS

Dulux Trade Ultra Grip Primer

A two-pack primer formulated to provide excellent adhesion to both interior and exterior surfaces

WATER-BASED

DATA SHEET 308



Key Benefits

Provides excellent adhesion on problem surfaces. For surfaces such as stove enamels, laminates and glass. Two pack primer

Water-
Based



Colour range	White
Pack sizes	1L when mixed (0.8L Base 0.2L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours and maximum 7 days. Hard dry after 16 hours. Recoat within 7 days for optimum intercoat adhesion
Coverage	Up to 10m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- For use on ceramic wall tiles, anodised aluminium, powder-coated metal etc.
- Suitable for interior and exterior use

AkzoNobel

EVERY JOB REFLECTS YOUR GOOD NAME. THAT'S WHY YOU DESERVE THE BEST

Visit your local merchant
and ask for Dulux Trade

Dulux TRADE

VINYL MATT

BEST EVER

IT'S YOUR REPUTATION

duluxtrade.co.uk

Dulux TRADE

BRIGHTER FUTURES >

WALLS AND CEILINGS

Dulux Trade decorative finishes offer the highest quality products delivering a variety of best in class properties, such as durability, coverage or spreading rate, to assist you in your internal decoration projects.

Walls and Ceilings Products

Walls and Ceilings Products	Place of application – Interior Surfaces											Recoatable	Water/ Solvent-based	
	General use	High traffic areas	Plaster Board		Plaster		Woodchip		Blown vinyl wall coverings		Masonry			
			Old	New	Dry	Not fully dry	Old	New	Old	New	Old (Primed & Sealed)			New
Supermatt				✓	✓	✓		✓		✓		✓	2-4 hours	Water-based
Fast Matt			✓	✓	✓		✓	✓	✓	✓	✓	✓	2-4 hours	Water-based
Ultra Matt			✓	✓	✓		✓	✓	✓	✓	✓		4 hours	Water-based
Vinyl Matt	✓		✓	✓	✓		✓	✓	✓	✓	✓		2-4 hours	Water-based
Vinyl Silk	✓		✓	✓	✓		✓	✓	✓	✓	✓		2-4 hours	Water-based
Vinyl Soft Sheen	✓		✓	✓	✓		✓	✓	✓	✓	✓		2-4 hours	Water-based
Ecosure Matt	✓		✓	✓	✓		✓	✓	✓	✓	✓		2-4 hours	Water-based
Durable Flat Matt	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓		2-4 hours	Water-based
Diamond Matt	✓	✓	✓	✓	✓		✓	✓			✓		4-6 hours	Water-based
Diamond Eggshell	✓	✓	✓	✓	✓		✓	✓			✓		4-6 hours	Water-based
Diamond High Performance Eggshell		✓	✓	✓	✓		✓	✓	✓	✓	✓		4-6 hours	Water-based



"I always recommend Dulux Trade, there's a big difference."

Phil Burandt
Professional Decorator



WALLS AND CEILINGS

Dulux Trade Supermatt

A matt emulsion paint for use on interior walls and ceilings that are not fully dry

WATER-BASED
DATA SHEET 410



Key Benefits

High opacity. Good coverage & application. Ideal for new plaster



Colour range	White, Magnolia and 150 tinted colours. Almond White and Gardenia are also available in ready mixed as 10L
Pack sizes	5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Ideal for use on new or skimmed interior plaster and interior masonry surfaces

WALLS AND CEILINGS

Dulux Trade Ultra Matt

A matt emulsion paint ideal for use on ceilings

WATER-BASED
DATA SHEET 549



Key Benefits

Excellent touching-in properties, providing near invisible touch-up for areas in critical lighting



Colour range	White
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	Thinning not generally required. Please refer to data sheet for details

- Specially formulated to provide a dead matt, non-reflective finish in all angles
- Ideal for hiding surface imperfections

Dulux Trade Fast Matt

A ready-for-use flat matt emulsion that is ideal for use on plasterboard

WATER-BASED
DATA SHEET 515



Key Benefits

Ready for use. Easy application and low splatter. Suitable for dry lining



Colour range	White, Magnolia and 150 tinted colours
Pack sizes	10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Low sheen of product makes touch-in easy and gives an excellent finish

Dulux Trade Vinyl Matt

A matt emulsion paint for use on interior walls and ceilings

WATER-BASED
DATA SHEET 411/536



Key Benefits

Best ever formulation*. Excellent opacity. Tough wipeable finish



Colour range	PBW, White, Magnolia, Black, Gardenia, Jasmine White, White Cotton, Natural Colico, Natural Hessian, Nutmeg White, Chic Shadow, Polished Pebble and over 14,000 colours, including Colour Palette , NCS2 and BS colours. Also available in the full Light & Space colour range*
Pack sizes	1L**, 2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Ideal for use on woodchip, dry plaster and a range of building boards
- Provides a durable finish that withstands everyday living

**Tinted base only. #5L only.

*Compared to pre - March 2014 formulation, Vinyl Matt Light & Space has not been upgraded.

WALLS AND CEILINGS

Dulux Trade Vinyl Silk

A silk emulsion paint for use on interior walls and ceilings

WATER-BASED
DATA SHEET 414



Key Benefits

Tough, washable finish. High opacity. Coverage up to 16m² per litre



Colour range	PBW, White, Magnolia and over 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Enhances low relief wall coverings and textured plaster
- Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms

WALLS AND CEILINGS

Dulux Trade Ecosure Matt

An environmentally focused[®] matt finish for interior walls and ceilings

WATER-BASED
DATA SHEET 526/538



Key Benefits

Lower embodied carbon^{*}. Excellent hiding and coverage. Coverage up to 17m² per litre



Colour range	PBW and over 14,000 colours, including Colour Palette , NCS2 and BS colours. Also available in Light & Space Absolute White ^{**}
Pack sizes	5L, 10L [†]
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Reduced VOC content
- 20% less embodied carbon[®]

^{*}PBW and some light colours only. Trace amounts of compounds may be found in components used in the paint such as colourants. ^{**}SL only. [†]PBW only. [‡]Up to 25% less embodied carbon than Dulux Trade Vinyl Matt (April 2014 formulation)

Dulux Trade Vinyl Soft Sheen

A fashionable mid-sheen emulsion paint for use on interior walls and ceilings

WATER-BASED
DATA SHEET 413



Key Benefits

Tough, washable finish. Fashionable mid-sheen finish. Coverage up to 16m² per litre



Colour range	PBW, Magnolia and over 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L*, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Ideal for use where a 'Satin' finish is required
- Not suitable for areas subject to heavy condensation, such as kitchens and bathrooms

*Not all colours available in 1L.

Dulux Trade Durable Flat Matt

A highly durable, flat matt finish for use on walls and ceilings

WATER-BASED
DATA SHEET 440/523



Key Benefits

Excellent durability. Flat matt finish. High opacity



Colour range	White and over 14,000 colours, including Colour Palette , NCS2 and BS colours. Also available in Light & Space Absolute White ^{**}
Pack sizes	2.5L [†] , 5L
Touch dry	Dependent on temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Ideal for period and contemporary properties
- Perfect at hiding imperfections and uneven wall surfaces

^{*}5L only. [†]Only available in Flat Matt. [‡]White only.

WALLS AND CEILINGS

Dulux Trade Diamond Matt

A tough, washable matt emulsion with superior durability

WATER-BASED
DATA SHEET 447/524



Key Benefits

Superior durability. Repeatably wipeable matt finish. Stain resistant

Durability



Colour range	PBW, Magnolia and over 11,500 colours*, including Colour Palette , NCS2 and BS colours. Also available in the full Light & Space colour range*
Pack sizes	2.5L, 5L, 10L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Even flatter, matt finish, perfect for hiding surface imperfections
- Tough and wipeable

*For availability in very deep colours, please contact the **Dulux Trade** Technical Advice Centre. #5L only.

**10L available in white and light base.

Dulux Trade Diamond Eggshell

For use on interior walls, ceilings and woodwork

WATER-BASED
DATA SHEET 408/537



Key Benefits

Superior durability. Repeatably wipeable eggshell finish. Stain resistant

Durability



Colour range	PBW, Magnolia* and over 14,000 colours, including Colour Palette , NCS2 and BS colours. Also available in the full Light & Space Colour range*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- 10 times tougher than **Dulux Trade** Vinyl Silk
- Tough, mid-sheen finish resistant to common household stains

*5L only.

WALLS AND CEILINGS

Dulux Trade Diamond High Performance Eggshell

For use on super high traffic areas including stairwells, corridors, waiting rooms, reception areas, retail interiors, gyms and changing rooms

WATER-BASED
DATA SHEET 545



Key Benefits

Super scuff resistant. Repeatably scrubbable eggshell finish. 5 x tougher than Diamond Eggshell

Extra Durability



Colour range	PBW, Magnolia and over 3,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- 5 times tougher and 43% more scuff resistant than standard **Dulux Trade** Diamond Eggshell
- Scrubbable mid-sheen finish



TRIM PRODUCTS

Whether revitalising interior trim or painting from new, Dulux Trade offers the highest quality paints to assist you in achieving a beautiful lasting finish.

Trim Products	Place of application								Recoatable	Water/ Solvent-based
	Interior Surfaces						Exterior Surfaces			
	Masonry	Wood		Metal		Heated Surfaces (e.g. radiators)	Wood	Metal		
		General use	New	General use	New					
Ecosure Undercoat		✓	✓	✓	✓				6 hours	Water-based
Ecosure Gloss		✓	✓	✓	✓				6 hours	Water-based
Undercoat	✓	✓	✓	✓	✓	✓	✓	✓	6-16 hours	Solvent-based
High Gloss	✓	✓	✓	✓	✓	✓	✓	✓	16-24 hours	Solvent-based
Satinwood		✓	✓	✓	✓				16-24 hours	Solvent-based
Eggshell		✓	✓	✓	✓				16-24 hours	Solvent-based
New Work Undercoat			✓		✓				6-16 hours	Solvent-based
New Work Gloss			✓		✓				16-24 hours	Solvent-based
Quick Dry Undercoat		✓	✓	✓	✓				4-5 hours	Water-based
Quick Dry Gloss		✓	✓	✓	✓				6 hours	Water-based
Quick Dry Satinwood		✓	✓	✓	✓				6 hours	Water-based



“Good finished quality and easier to work with”

Craig Smith
Professional Decorator



Dulux Trade Ecosure Undercoat

A professional quality, durable and quick drying undercoat with good opacity and adhesion properties

WATER-BASED
DATA SHEET 528



Key Benefits

Lower embodied carbon[^]. Excellent opacity, flow and adhesion. Quick drying

Water-Based

Lower Embodied Carbon[^]



Colour range	PBW plus 18 tinted colours
Pack sizes	2.5L, 5L*
Touch dry	Dependent on temperature and humidity
Recoat	6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Suitable for interior wood and metal
- 30% less embodied carbon when undercoat and gloss used as a system[^]

TIP

To get the best from the **Ecosure** Gloss system, lightly dampen both a synthetic brush and the surface before application to increase the flow out.

*PBW only. [^]Compared with **Dulux Trade** solvent-based system (High Gloss and Undercoat)

Dulux Trade Undercoat

The ideal foundation for **Dulux Trade** High Gloss

SOLVENT-BASED
DATA SHEET 404



Key Benefits

Excellent opacity. Great flow. Coverage up to 17m² per litre



Colour range	PBW, White, Dark Grey and 17 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2-6 hours
Recoat	After 6-16 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Provides a low-sheen finish with excellent flow out of brush marks
- Retains good 'cling' to sharp edges
- Can also be used with **Dulux Trade** Eggshell and Satinwood to provide surface obliteration over strong colours or poor surfaces

Dulux Trade Ecosure Gloss

A professional quality, quick drying and high sheen finish with good flow and application properties

WATER-BASED
DATA SHEET 527



Key Benefits

Lower embodied carbon[^]. Excellent flow and opacity. High gloss

Water-Based

Lower Embodied Carbon[^]



Colour range	PBW and more than 5,000 colours, including Colour Palette and BS colours
Pack sizes	2.5L, 5L*
Touch dry	Dependent on temperature and humidity
Recoat	6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- Excellent flow and application
- Non-yellowing
- 30% less embodied carbon when undercoat and gloss used as a system[^]

TIP

To get the best from the **Ecosure** Gloss system, lightly dampen both a synthetic brush and the surface before application to increase the flow out.

*PBW only. [^]Compared with **Dulux Trade** solvent-based system (High Gloss and Undercoat)

Dulux Trade High Gloss**

For general use on interior wood and metal

SOLVENT-BASED
DATA SHEET 403



Key Benefits

Tough, durable finish. Excellent flow and opacity. Coverage up to 18m² per litre



Colour range	PBW, White and Black and more than 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoat	16-24 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Tough, durable finish with excellent flow out of brushmarks
- Resistant to repeated washing and mild chemical fume attack
- Can be used on heated surfaces, e.g. hot water pipes and radiators although this may increase the speed of yellowing

See back page. For long-lasting whiteness, we recommend the use of a water-based formulation such as **Dulux Trade Ecosure Gloss.

Dulux Trade Satinwood**

For use on interior wood and metal

SOLVENT-BASED

DATA SHEET 406



Key Benefits

Tough, durable finish. Self undercoating.
Dirt resistant



Colour range	PBW and more than 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	After 4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Will withstand repeated washing

See back page. For long-lasting whiteness, we recommend the use of a water-based formulation such as **Dulux Trade Quick Dry Satinwood.

Dulux Trade New Work Undercoat

Specifically formulated for the demanding requirements of new substrates

SOLVENT-BASED

DATA SHEET 422



Key Benefits

Ideal for new surfaces. Superb opacity.
Excellent filling properties



Colour range	White only
Pack sizes	5L
Touch dry	After 2-6 hours
Recoatable	6-16 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- The ideal partner for **Dulux Trade New Work Gloss**
- Superb obliteration and edge coverage

Dulux Trade Eggshell**

A tough, durable, mid-sheen finish for interior wood and metal

SOLVENT-BASED

DATA SHEET 405



Key Benefits

Tough, durable finish. Self undercoating.
Coverage up to 17m² per litre



Colour range	PBW, White and more than 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L*, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	After 16-24 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please see data sheet for details

- Will withstand repeated washing
- Tough, durable finish with mild chemical resistance

*only available in bases

See back page. For long-lasting whiteness, we recommend the use of a water-based formulation such as **Dulux Trade Diamond Eggshell.

Dulux Trade New Work Gloss**

Specifically formulated for the demanding requirements of new substrates

SOLVENT-BASED

DATA SHEET 424



Key Benefits

Ideal for new surfaces. Excellent opacity and sharp edge cling. Coverage up to 18m² per litre



Colour range	White only
Pack sizes	5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please see data sheet for details

- Excellent intercoat adhesion to **Dulux Trade New Work Undercoat**
- Excellent opacity with good flow of brush marks

See back page. For long-lasting whiteness, we recommend the use of a water-based formulation such as **Dulux Trade Ecosure Gloss.

Dulux Trade Quick Dry Undercoat*

The ideal foundation for **Dulux Trade Quick Dry Gloss**

WATER-BASED

DATA SHEET 552



Key Benefits

Excellent coverage. Advanced water-based technology. Perfect for **Dulux Trade Quick Dry Gloss**

Quick
Drying

Water-Based



Colour range	White and more than 14,000 colours including Colour Palette , NCS2 and BS colours*
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-5 hours
Coverage	Up to 10m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Can be used on all interior wood and metal
- Excellent opacity and coverage
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints

TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Dulux Trade Quick Dry Satinwood

An advanced water-based, satin finish

WATER-BASED

DATA SHEET 551



Excellent satin finish. Advanced water-based technology. Tough, durable finish

Quick
Drying

Water-Based



Colour range	PBW and more than 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- A smooth, durable top coat for use on interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints

TIP

To get the best from Quick Dry Satinwood, lightly dampen a synthetic brush and the surface before application to increase the flow out.

Dulux Trade Quick Dry Gloss

An advanced water-based, high gloss finish

WATER-BASED

DATA SHEET 550



Key Benefits

High gloss finish. Advanced water-based technology. Tough and durable

Quick
Drying

Water-Based



Colour range	PBW and more than 14,000 colours, including Colour Palette , NCS2 and BS colours
Pack sizes	1L, 2.5L, 5L
Touch dry	Dependent on temperature and humidity
Recoatable	6 hours
Coverage	Up to 12m ² per litre
Thinning	This product can be thinned. Please refer to datasheet for details

- A smooth, durable top coat for use on both interior wood and metal
- For best results use a good quality synthetic (nylon polyester) brush or a short pile synthetic/mohair roller designed for the application of water-based paints

TIP

To get the best from the Quick Dry system, lightly dampen a synthetic brush and the surface before application to increase the flow out.

SWITCH TO THE DULUX TRADE QUICK DRY RANGE AND DELIVER GREATER VALUE

With more and more decorators switching from solvent-based trim products to water-based, the **Dulux Trade** Quick Dry range allows you to stay ahead in a changing market by delivering a professional finish to be proud of. Designed to be exceptionally durable, the products within the **Dulux Trade** Quick Dry range keep trim surfaces looking good for longer, representing a credible water-based alternative.

DULUX TRADE QUICK DRY OFFERS A WIDE RANGE OF BENEFITS:

- Fast drying times, allowing you to save time on the entire job
- Spraying application, enhancing your productivity and delivering a smooth finish
- Lower VOC, ensuring virtually no odour for a safer work environment
- Durable finish to withstand everyday wear and tear



“My customers expect a really nice, high sheen finish. This is like glass.”

Darren Whitfield
Whitfields Painters & Decorators

DULUX TRADE QUICK DRY UNDERCOAT AND GLOSS SYSTEM

Used as a system, **Dulux Trade** Quick Dry Undercoat and Gloss deliver ultimate performance. You can expect similar flow-out and high sheen levels as a solvent-based system combined with faster drying times and longer lasting whiteness.



DULUX TRADE QUICK DRY SATINWOOD

Dulux Trade Quick Dry Satinwood gives a fashionable mid-sheen finish. Its high durability and flexibility, make it suitable for high traffic areas. Its fast drying times and undercoating properties means increased productivity and a faster job overall.



For more information and tips on how to get the most out of our water-based products visit

duluxtrade.co.uk/maketheswitch

EXTERIOR PRODUCTS

By using the Weathershield range, you can be confident that you have the ultimate exterior protection, with durability that lasts up to 15 years for exterior masonry paints and up to 8 years on exterior woodwork.

Exterior Products

Exterior Products	Place of application							Touch Dry	Water/ Solvent-based
	Masonry		Render	Joinery		Smooth Planed Wood			
	Sound & Dry	Dry & Friable	Sound & Dry	General Use	New or Bare	General Use	New or Bare		
Smooth Masonry Paint	✓		✓					30 mins	Water-based
Textured Masonry Paint	✓		✓					1-2 hours	Water-based
Maximum Exposure Smooth Masonry	✓		✓					30 mins	Water-based
All Seasons Smooth Masonry	✓		✓					30 mins	Solvent-based
All Seasons Masonry Gloss	✓		✓					4 hours	Solvent-based
Quick Dry Exterior Undercoat				✓		✓		1-2 hours	Water-based
Quick Dry Exterior Gloss				✓		✓		2 hours	Water-based
Quick Dry Exterior Satin				✓		✓		1-2 hours	Water-based
Preservative Primer [†] (BP)					✓		✓	24 hours	Water-based
Exterior Flexible Undercoat				✓		✓		2-6 hours	Solvent-based
Exterior High Gloss				✓		✓		4-6 hours	Solvent-based
Stabilising Primer		✓						8-12 hours	Solvent-based
Exterior Flexible Filler	✓			✓		✓		2 hours	Water-based
Multi-Surface Fungicidal Wash	✓			✓		✓		n/a	Water-based

Dulux Trade Weathershield Smooth Masonry Paint

A quick drying water-based exterior masonry paint providing a smooth finish

WATER-BASED
DATA SHEET 418



Key Benefits

15 year all weather protection. Shower resistant within 30 minutes. Excellent opacity



Durability



Colour range	PBW, Magnolia, 5 ready mixed colours and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	2.5L, 5L, 10L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces of low porosity e.g. rendering: 14-16m ² per litre On textured surfaces of low porosity e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For smooth exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growth

Dulux Trade Weathershield Maximum Exposure Smooth Masonry

A smooth masonry paint offering excellent durability and protection even in harsh and demanding environments

WATER-BASED
DATA SHEET 522



Key Benefits

15 year all weather protection. For use in demanding environments. 5 x more flexible than standard **Dulux Trade** Masonry Paint

Chemical Resistant



Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	30 minutes
Recoatable	After 2-4 hours dependent on temperature and humidity
Coverage	On smooth surfaces: 12 -14m ² per litre. On textured surfaces: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Salt/chemical spray resistant
- Contains fungicide to help protect against the disfiguring effect of mould growth on its film
- Application from 7°C

TIP

Before applying **Weathershield** Maximum Exposure, check the weather conditions and the temperature of the substrate to ensure that the product will cure thoroughly. Remember, it can only cure properly at temperatures above 7°C.

Dulux Trade Weathershield Textured Masonry Paint

A quick drying water-based exterior masonry paint providing a textured finish

WATER-BASED
DATA SHEET 419



Key Benefits

10 year all weather protection. Helps bridge fine cracks. Coverage up to 8m² per litre



Colour range	PBW and 420 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 6-8m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 3-4m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For a textured finish on exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growth

Dulux Trade Weathershield All Seasons Smooth Masonry

A quick drying, smooth finish which helps to extend the outdoor decorating season on exterior masonry

SOLVENT-BASED
DATA SHEET 420



Key Benefits

15 year all weather protection. Shower resistant within 15 minutes. Can be applied down to 5°C

Durability



Colour range	PBW, Magnolia, Black and 225 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	4.5L, 5L*
Touch dry	30 minutes
Recoatable	After 1-2 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 14-16m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on exterior walls, including: blockwork, concrete, stonework, cement rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide and algicide to help protect against the disfiguring effect of surface growths

*Ready-mixed colours only.

Dulux Trade Weathershield
All Seasons Masonry Gloss

A quick drying, high-sheen finish helps to extend the outdoor decorating season on exterior walls

SOLVENT-BASED

DATA SHEET 429



Key Benefits

10 year all weather protection. Can be applied down to 5°C. High sheen finish

Durability



Colour range	PBW, Magnolia, Gardenia and 225 lightfast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	4.5L, 5L*
Touch dry	4 hours
Recoatable	After 16 hours
Coverage	On smooth surfaces of low porosity, e.g. rendering: 14-16m ² per litre. On textured surfaces of low porosity, e.g. pebbledash: 4-6m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on exterior walls, including: blockwork, concrete, stonework, cement, rendering, roughcast, pebbledash and also brickwork (not common or fletton)
- Contains a fungicide to help protect against the disfiguring effect of mould growths on its film

*Ready-mixed colours only.

Dulux Trade Weathershield
Quick Dry Exterior Gloss

A durable water-based quick drying exterior gloss, giving up to 6 years protection

WATER-BASED

DATA SHEET 534



Key Benefits

6 year all weather protection. Tough and durable protection. Coverage up to 16m² per litre

Water-Based



Colour range	PBW and over 620 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2 hours
Recoatable	4 hours
Coverage	Up to 16m ² per litre
Thinning	This product should not be thinned

- Quick drying, easy clean up
- Excellent flowout of brush marks
- Contains a fungicide to help protect against the disfiguring effect of mould and growth

Dulux Trade Weathershield
Quick Dry Exterior Undercoat

A quick drying, water-based undercoat for exterior trim and woodwork

WATER-BASED

DATA SHEET 531



Key Benefits

6 year all weather protection. Flexible formulation. Coverage up to 16m² per litre

Water-Based



Colour range	PBW and 18 tinted colours
Pack sizes	1L, 2.5L, 5L*
Touch dry	1-2 hours dependent on temperature and humidity
Recoatable	2-4 hours dependent on temperature and humidity
Coverage	Up to 16m ² per litre on most surfaces
Thinning	Thinning not generally required

- Provides excellent opacity
- Quick drying easy clean up
- Great flexibility to help absorb the natural movement of wood

*PBW only.

Dulux Trade Weathershield
Quick Dry Exterior Satin

A trim product that has the flexibility and durability of the Weathershield system

WATER-BASED

DATA SHEET 428



Key Benefits

6 year all weather protection. Tough and durable protection. Coverage up to 20m² per litre

Water-Based



Colour range	PBW and over 620 tinted colours
Pack sizes	1L*, 2.5L, 5L**
Touch dry	1-2 hours
Recoatable	After 2-4 hours
Coverage	Up to 20m ² per litre on most surfaces
Thinning	This product should not be thinned

- Contains a fungicide to help protect against the disfiguring effect of mould growth on its film

*Tinted colours only.

**PBW only.

Dulux Trade Weathershield Preservative Primer^{+(BP)†}

WATER-BASED
DATA SHEET 540

A water-based preservative basecoat for use as part of the **Weathershield** Exterior Gloss System (WEGS)



Key Benefits

8 year all weather protection*. Penetrates and seals new bare wood. Protects from decay and blue stain fungi



Durability



Colour range	Light green tint
Pack sizes	1L, 2.5L, 5L
Touch dry	Up to 24hrs
Recoatable	Allow the previous coat to soak in before applying the next
Coverage	4-5m ²
Thinning	This product should not be thinned

- Provides a sound basecoat for **Weathershield** Exterior Flexible Undercoat and High Gloss

TIP

This primer is water-based, protects from decay as well as blue stain and it is better for the environment. It also has green tint to help visualise treated areas.

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years.
†see back page for details

Dulux Trade Weathershield Exterior High Gloss

SOLVENT-BASED
DATA SHEET 401

For general use on exterior joinery and smooth planed wood. Part 3 of the **Weathershield** Exterior Gloss System (WEGS)



Key Benefits

8 year all weather protection*. Tough and durable production. Coverage up to 18m² per litre



Durability



Colour range	PBW, Black and more than 4000 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 18m ² per litre on most surfaces
Thinning	This product should not be thinned

- Provides an excellent high gloss finish
- Can also be used on plastic gutters, pipes and primed metal such as garage doors
- Contains a fungicide to help protect against the disfiguring effect of mould growths on its film

TIP

To get up to 8 years weather protection, you should always use the recommended system. For previously painted surfaces, apply one coat of undercoat and two coats of the gloss for a perfect gloss finish.

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years.

Dulux Trade Weathershield Exterior Flexible Undercoat

SOLVENT-BASED
DATA SHEET 402

A flexible exterior undercoat for use with **Weathershield** Exterior High Gloss. Part 2 of the **Weathershield** Exterior Gloss System (WEGS)



Key Benefits

8 year all weather protection*. Excellent flexibility and adhesion. Coverage up to 16m² per litre



Durability



Colour range	Brilliant White, Dark Grey and 17 tinted colours
Pack sizes	1L, 2.5L, 5L
Touch dry	2-6 hours
Recoatable	Brilliant White and Dark Grey: 6-8 hours; all other colours: 16-24 hours
Coverage	Up to 16m ² per litre on most surfaces
Thinning	This product should not be thinned

- Provides good build and excellent opacity
- Can also be used on primed metal such as fences, pipes and garage doors
- For the best results, you should always use the correct system to ensure maximum durability

*Our WEGS system is accredited by the British Board of Agrément. In normal conditions WEGS will have good colour stability and perform satisfactorily for up to 8 years.

Dulux Trade Weathershield Stabilising Primer

SOLVENT-BASED
DATA SHEET 304

A ready-to-use sealer for use with the **Weathershield** range of masonry paints



Key Benefits

Seals and stabilises. For powdery masonry surfaces. Ready for use



Colour range	Clear
Pack sizes	5L
Touch dry	8-12 hours dependent on temperature and humidity
Recoatable	16-24 hours
Coverage	Up to 12m ² per litre on most surfaces
Thinning	This product should not be thinned

- Use only on dry exterior masonry that remains powdery and friable after thorough preparation
- Do not seal sound, new or bare surfaces

EXTERIORS

Dulux Trade Weathershield Exterior Flexible Filler

An exterior filler for filling in open joints, splits and minor cracks in wood and masonry surfaces

WATER-BASED

DATA SHEET 802



Key Benefits

Superior flexibility. Resists shrinking and cracking. Easy to sand



Colour range	Light Grey
Pack sizes	450g
Touch dry	2 hours depending on depth of the repair
Thinning	This product should not be thinned, but can be made easier to apply by adding a few drops of water

- Can be used with most **Dulux Trade** interior finishes
- Not suitable for use with varnish systems or woodstains
- Not to be used as a fine surface filler or for major repairs

Dulux Trade Weathershield Multi-Surface Fungicidal Wash

A fungicidal wash for cleaning wood and masonry surfaces

WATER-BASED

DATA SHEET 803



Key Benefits

Ready for use. Kills algae and mould growth. For wood and masonry surfaces



Colour range	Clear
Pack sizes	5L
Coverage	Up to 25m ² per litre
Thinning	This product should not be thinned

- Registered with the HSE* as a registered pesticide
- Can be used both inside and out with most **Dulux Trade** and **Weathershield** decorative paint systems, to give improved performance in areas subject to attack from surface growths

*Registered pesticide.



SPECIALIST PRODUCTS

In demanding commercial environments, the innovative range of specialist products from Dulux Trade offers you high performing solutions to extend maintenance cycles.

Specialist Products	Place of application						Recoatable	Water/ Solvent-based	
	Interior Walls and Ceilings	Interior Concrete Walls	Exterior Concrete Walls		Cladding	Metal			Floors e.g. Wood, Concrete, Steel etc.
			Bare	Painted					
Sterishield Diamond Matt	✓						2-4 hours	Water-based	
Sterishield Diamond Eggshell	✓						2-4 hours	Water-based	
Dry Fall Eggshell	✓						2 hours	Water-based	
Blockfiller Plus	✓	✓					4 hours	Water-based	
Cladshield					✓		4-6 hours	Water-based	
Pyroshield Basecoat	✓						12 hours	Water-based	
Pyroshield Durable Matt	✓						2-4 hours	Water-based	
Pyroshield Durable Eggshell	✓						2-4 hours	Water-based	
Metalshield Gloss						✓	4-6 hours	Solvent-based	
Metalshield Satin						✓	4-6 hours	Solvent-based	
Floorshield							✓	12-16 hours	Solvent-based
High Performance Floor Paint							✓	16-24 hours	Water-based
Line Marking Paint							✓	1 hour	Solvent-based
Anti-Graffiti Primer	✓	✓	✓	✓			16 hours	Water-based	
Anti-Graffiti Clearcoat	✓	✓	✓	✓			16 hours	Water-based	
Mouldshield Fungicidal Matt	✓						4-6 hours	Water-based	
Mouldshield Fungicidal Eggshell	✓						4-6 hours	Water-based	
Cellar Paint	✓						2-16 hours	Solvent-based	

Dulux Trade Sterishield Diamond Matt#

WATER-BASED
DATA SHEET 519

A quick drying water-based matt emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal interior wall and ceiling surfaces



Key Benefits

Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide

Durability

Anti-Bacterial



Colour range	More than 10,000 colours, including Colour Palette , NCS2 and BS colours*
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 16m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable matt finish

*For availability in very deep colours please contact the **Dulux Trade** Technical Advice Centre.
#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

Dulux Trade Dry Fall Eggshell

WATER-BASED
DATA SHEET 444

A mid-sheen emulsion paint for use on commercial ceilings and walls



Key Benefits

Covers all substrates. Excellent opacity and adhesion. Overspray dries to a dust*



Colour range	White
Pack sizes	10L
Touch dry	30 minutes
Recoatable	2 hours
Coverage	Up to 9m ² per litre
Application	This product is formulated for airless spray only
Thinning	Thinning not generally required

- Ideal for use on large areas which must be painted with minimum disruption
- Excellent finish, high opacity
- Very good adhesion, quick drying

*On a drop of 10 ft/3.3m at 25°C and 50% RH

Dulux Trade Sterishield Diamond Eggshell#

WATER-BASED
DATA SHEET 520

A quick drying water-based mid-sheen emulsion, containing an in-film bactericide which inhibits bacteria. Suitable for all normal interior wall and ceiling surfaces



Key Benefits

Anti-bacterial. Tough, scrubbable and stain resistant. Contains an active silver bactericide

Durability

Anti-Bacterial



Colour range	More than 10,000 colours, including Colour Palette , NCS2 and BS colours*
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2-4 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Formulated to reduce bacterial populations of MRSA, E-Coli and Pseudomonas Aeruginosa
- Silver bactericide actively inhibits bacteria
- Durable washable eggshell finish

#Sterishield from **Dulux Trade** is not a substitute for good hygiene practices.

*For availability in very deep colours please contact the **Dulux Trade** Technical Advice Centre.

Dulux Trade Blockfiller Plus

WATER-BASED
DATA SHEET 448

Fills minor imperfections and upgrades the appearance of concrete and concrete blocks to achieve a smooth finish



Key Benefits

Excellent filling properties. For use on concrete surfaces



Colour range	White
Pack sizes	10L
Touch dry	1 hour
Recoatable	4 hours
Coverage	5m ² per litre depending upon the porosity of the substrate
Application	Apply by airless spray then back roll to fill all voids and holes. May also be applied by brush or roller
Thinning	This product should not be thinned

- Can be top coated with a range of finishes
- Fast and effective spray and back rolling application

TIP

Take care to not achieve excessive filler build-up as it may cause the topcoat to peel.

Dulux Trade
Cladshield

WATER-BASED
DATA SHEET 532

A water-based mid-sheen formulation offering up to 8 years protection for cladding



Key Benefits

8 year protection. For previously painted, or weathered cladding. Highly durable



Colour range	PBW and 420 light fast optimised tinted colours from the Weathershield fandeck as well as a range of NCS2, RAL and BS colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Tough and durable
- Suitable for application over previously painted and weathered cladding

Dulux Trade
Pyroshield Durable Matt

WATER-BASED
DATA SHEET 539

A durable, matt, flame retardant formulation for upgrading the reaction to fire surface classification for moderate risk surfaces



Key Benefits

Flame retardant. Upgrades Class 3 surfaces to Class O, tested to BS476 part 6 & 7. Highly durable smooth finish



Colour range	White and approximately 3000 tinted colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Matt are required at a coverage of 12m ² per litre
Thinning	This product must not be thinned

- No antimony or brominated compounds
- Inhibits the spread of flame on previously painted wall and ceiling surfaces, and is proven to upgrade Class 3 substrates to Class O
- Suitable for all plaster-based interior wall and ceiling surfaces

Dulux Trade
Pyroshield Basecoat

WATER-BASED
DATA SHEET 450

A flame-retardant basecoat to be used as part of a system for upgrading the reaction to fire surface classification



Key Benefits

Flame retardant. Upgrades Class 4 Warrington blue board surface to Class O. For use over multi-layered paint systems



Colour range	White
Pack sizes	10L
Touch dry	2 hours
Recoatable	12 hours
Coverage	3 coats of Pyroshield are normally required to achieve a combined coverage of 0.46m ² per litre. Pyroshield Basecoat should be applied by roller to achieve a coverage of 1.4m ² per litre, per coat. A 10L container of Pyroshield Basecoat from Dulux Trade should cover no more than 14m ²
Thinning	This product should not be thinned, but must be stirred thoroughly in the can before use

- No antimony or brominated compounds. Water-based, quick drying formulation
- The thick film gives a slightly textured finish, which may be modified with appropriate texturing tools
- Overcoat **Pyroshield** Basecoat with an approved **Dulux Trade** decorative finish

Dulux Trade
Pyroshield Durable Eggshell

WATER-BASED
DATA SHEET 546

A durable, eggshell, flame retardant formulation for upgrading the reaction to fire surface classification for moderate risk surfaces



Key Benefits

Flame retardant. Upgrades Class 3 surfaces to Class O, tested to BS476 part 6 & 7. Highly durable smooth finish



Colour range	Available in a range of tinted colours
Pack sizes	5L
Touch dry	Dependent upon temperature and humidity
Recoatable	2-4 hours
Coverage	2 coats of Pyroshield Durable Eggshell are required at a coverage of 12m ² per litre
Thinning	This product must not be thinned

- No antimony or brominated compound
- Inhibits the spread of flame on previously painted wall and ceiling surfaces, and is proven to upgrade Class 3 substrates to Class O
- Suitable for all plaster-based interior wall and ceiling surfaces

Dulux Trade Metalshield Gloss

SOLVENT-BASED
DATA SHEET 512

A high performance metal coating formulated to provide long-lasting protection against corrosion



Key Benefits

8 year protection*. High performance protection for metal. For ferrous and non-ferrous

Durability



Colour range	White, Black, Silver, Gold and over 1,500 colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	Thinning not generally required

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive gloss finish available in a range of colours

*Applying our straight-forward, single pack system – an appropriate **Metalshield** Primer plus 2 coats of **Metalshield** Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade Floorshield

SOLVENT-BASED
DATA SHEET 507

A hard-wearing floor paint ideal for use in domestic, commercial and light industrial environments



Key Benefits

Hard wearing. Suitable for light to medium traffic areas. Mid-sheen finish



Colour range	Ash Grey and over 1,500 colours
Pack sizes	5L
Touch dry	2-4 hours
Recoatable	12-16 hours
Coverage	Up to 16m ² per litre
Thinning	This product can be thinned. Please refer to data sheet for details

- Withstands scuffing, repeated washing and mild chemical spillage
- Formulated for use on concrete, wood and steel
- Suitable for light to medium traffic areas

Dulux Trade Metalshield Satin

SOLVENT-BASED
DATA SHEET 541

A high performance metal coating formulated to provide long-lasting protection against corrosion



Key Benefits

8 year protection*. High performance protection for metal. For ferrous and non-ferrous

Durability



Colour range	White, Black and over 1,500 colours
Pack sizes	2.5L, 5L
Touch dry	1-2 hours
Recoatable	4-6 hours
Coverage	Up to 13m ² per litre
Thinning	Thinning not generally required

- Suitable for railings, garage doors, lift shafts, staircases and emergency exit routes
- Attractive satin finish available in a wide range of colours
- Wide choice of colours

*Applying our straight-forward, single pack system – an appropriate **Metalshield** Primer plus 2 coats of **Metalshield** Gloss or Satin – will deliver up to 8 years metal protection

Dulux Trade High Performance Floor Paint

WATER-BASED
DATA SHEET 533

A two pack water-based epoxy floor paint suitable for areas of high wear and commercial usage



Key Benefits

Optimum performance. Highly durable, 2 pack system. Suitable for use in heavy commercial environments



Colour range	Goosewing and Tideway
Pack sizes	5L when mixed (1.78L Base and 3.22L Activator)
Touch dry	4-6 hours
Recoatable	16-24 hours
Coverage	Up to 6m ² per litre
Thinning	Poor adhesion will result if thinned

- Highly durable mid-sheen finish
- Excellent abrasion resistance on concrete and metal floors

TIP

Supplied in correct proportions – add all of the Base to the Activator container and mix thoroughly for at least 5 minutes, until the product is smooth and even.

Dulux Trade Line Marking Paint

A hard-wearing, single pack, acrylated rubber line marking paint for interior and exterior use

SOLVENT-BASED

DATA SHEET 525



Key Benefits

Excellent scuff resistance. High build finish. Withstands mild chemical spillage and repeated washing



Colour range	White, yellow
Pack sizes	5L
Touch dry	30 minutes
Recoatable	1 hour
Coverage	Up to 10m ² per litre
Thinning	This product should not be thinned

- Excellent adhesion and durability
- Ideal for use in marking areas such as car parks and demarcation zones on concrete and asphalt surfaces

Dulux Trade Anti-Graffiti Clearcoat

Part 2 of a 2 part system. For use after primer on both previously painted and new surfaces

WATER-BASED

DATA SHEET 816



Key Benefits

Extra durability. For use on primed or previously coated surfaces. Interior and exterior use

Durability



Colour range	Clear
Pack sizes	5L when mixed (3.91L Base and 1.09L Activator)
Touch dry	6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 8m ² per litre

- Dries to a tough, gloss finish that has good impact and abrasive qualities
- Can be used in areas where a low odour finish is required, e.g. hospitals, school and public buildings

Dulux Trade Anti-Graffiti Primer

Part 1 of a 2 part system. For use on sound, previously painted surfaces or sealed, bare concrete

WATER-BASED

DATA SHEET 813




Key Benefits

Extra durability. For use on bare or sealed surfaces. Interior and exterior use



Colour range	White
Pack sizes	5L when mixed (4L Base and 1L Activator)
Touch dry	4-6 hours at 20°C
Recoatable	Minimum 16 hours, maximum 7 days. Hard dry after 16 hours
Coverage	Up to 10m ² per litre
Pot life	6 hours at 20°C

- Use as part of the anti-graffiti system
- For use on areas exposed to repeated graffiti
- Can also be used as a hygienic coating e.g. hospitals, industrial kitchens and food and drink processing industries

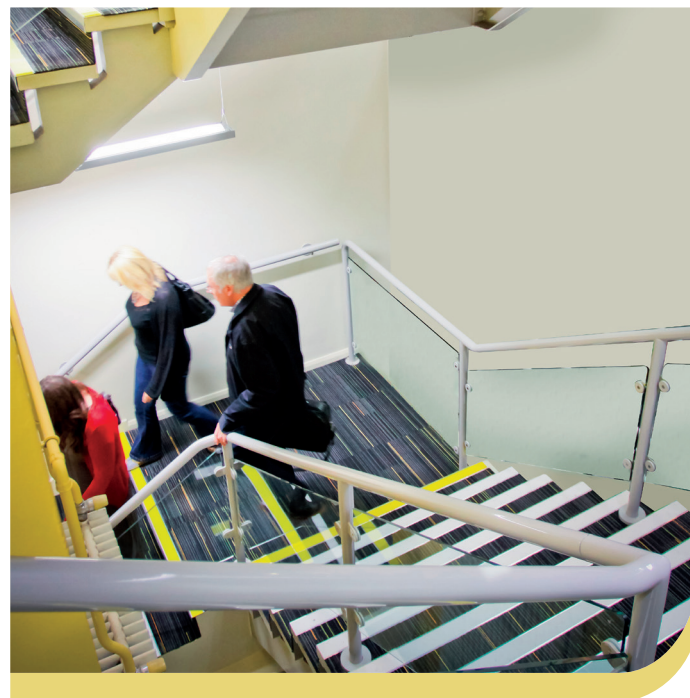

Dulux Trade
Mouldshield Fungicidal Matt##

A matt emulsion paint that contains a mild fungicide

WATER-BASED

DATA SHEET 412



Key Benefits

Antifungal. Inhibits mould and fungi growth on walls. Good adhesion and durability



Colour range	PBW and over 7,000 colours, including many Colour Palette , NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 17m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- For use on interior walls and ceilings where surface mould growths are a problem
- Ideal for use on woodchip, blown vinyl wall coverings etc., as well as dry plaster and a range of building boards

##See back page for details

Dulux Trade
Cellar Paint

A durable, solvent-based acrylic system unique to **AkzoNobel**

SOLVENT-BASED

DATA SHEET 503



Key Benefits

Tough and durable. Suitable for interior masonry in damp conditions. Discourages dirt retention



Colour range	PBW
Pack sizes	5L
Touch dry	1-5 hours
Recoatable	After 2-16 hours. The drying time will vary according to temperature and humidity, e.g. the drying times quoted will be significantly longer in cold, damp conditions
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	Thinning not generally required. Please refer to data sheet for details

- Contains a fungicide which inhibits mould growth on paint surface
- Can be applied to interior masonry surfaces (not common or fletton brickwork) that are slightly damp but not saturated, such as cellars, porches and conservatories

Dulux Trade
Mouldshield Fungicidal Eggshell##

An eggshell emulsion paint that contains a mild fungicide and is ideal for kitchens and bathrooms

WATER-BASED

DATA SHEET 409



Key Benefits

Antifungal. Inhibits mould and fungi growth on walls. Excellent adhesion and durability



Colour range	PBW and more than 7,000 colours, including many Colour Palette , NCS2 and BS colours
Pack sizes	5L
Touch dry	Dependent on temperature and humidity
Recoatable	4-6 hours
Coverage	Up to 16m ² per litre on sealed surfaces
Thinning	This product can be thinned. Please refer to data sheet for details

- More resistant to condensation than conventional emulsion paints
- For use on interior walls, ceilings and woodwork, where surface mould growth is a problem

##See back page for details

WOODCARE

To protect internal and external wood for the long term, Dulux Trade offers a wide range of professional woodcare products. Formulated for exceptional performance, each has been developed to deliver outstanding results for any job.

Exterior Products

Exterior Products	Place of application						Water/ Solvent-based
	Doors	Joinery	Fascias/Cladding	Product Finish			
				Semi-Transparent	Clear	Opaque	
Ultimate Woodstain	✓	✓	✓	✓			Solvent-based
Ultimate Opaque	✓	✓	✓			✓	Solvent-based
Quick Dry Woodstain	✓	✓	✓	✓			Water-based
Quick Dry Opaque	✓	✓	✓			✓	Water-based
Aquatech Preservative Basecoat ^{+(BP)}	✓	✓	✓	✓			Water-based
Classic Select Woodstain			✓	✓			Solvent-based
Yacht Varnish	✓				✓		Solvent-based

Interior Products

Interior Products	Place of application							Water/ Solvent-based
	Doors	Floors	Furniture	Trim	Joinery	Product Finish		
						Semi-Transparent	Clear	
Protective Woodsheen Woodstain	✓		✓	✓	✓	✓		Solvent-based
Danish Oil			✓		✓		✓	Solvent-based
Diamond Glaze Varnish	✓	✓	✓	✓	✓	✓	✓	Water-based
Quick Dry Varnish	✓		✓	✓	✓	✓	✓	Water-based
Polyurethane Varnish	✓	✓	✓	✓	✓		✓	Solvent-based

Dulux Trade Ultimate Woodstain

A high performance semi-transparent woodstain, ideal for exterior joinery and cladding

SOLVENT-BASED
DATA SHEET 623



Key Benefits

Exceptional durability – up to 10 years protection.
Excellent spreading rate of up to 20m² per litre

Durability



Colour range	Available in 21 natural wood colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Aquatech** Preservative Basecoat+ (BP)[†]

[†]See back cover for full details.

Dulux Trade Quick Dry Woodstain

A quick drying, high performance semi-transparent woodstain, ideal for exterior joinery and cladding

WATER-BASED
DATA SHEET 615



Key Benefits

Exceptional durability – up to 10 years protection.
Excellent spreading rate of up to 20m² per litre

Water-Based

Quick Drying



Colour range	Available in 21 natural wood colours
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible finish resists cracking, flaking and peeling
- Quick drying - recoatable in 2 hours

N.B. For new wood, use with **Aquatech** Preservative Basecoat+ (BP)[†]

[†]See back cover for full details.

Dulux Trade Ultimate Opaque

A high performance opaque finish, ideal for exterior joinery and cladding

SOLVENT-BASED
DATA SHEET 624



Key Benefits

Exceptional durability – up to 10 years protection.
Excellent spreading rate of up to 20m² per litre

Durability



Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
- Excellent water repellency

N.B. For new wood, use with **Aquatech** Preservative Basecoat+ (BP)[†]

[†]See back cover for full details.

Dulux Trade Quick Dry Opaque

A quick drying water-based opaque finish, ideal for exterior joinery and cladding

WATER-BASED
DATA SHEET 611



Key Benefits

Exceptional durability – up to 10 years protection.
Excellent spreading rate of up to 20m² per litre

Water-Based

Quick Drying



Colour range	Available in Black and White ready-mixed and 600 colours within the opaque range
Pack sizes	1L, 2.5L, 5L
Touch dry	1 hour
Recoatable	2 hours
Coverage	Smooth wood: Up to 20m ² /litre/coat (normally 2 coats)

- Highly flexible opaque finish resists cracking, flaking and peeling
- Quick drying - recoatable in 2 hours

N.B. For new wood, use with **Aquatech** Preservative Basecoat+ (BP)[†]

[†]See back cover for full details.

Dulux Trade
Aquatech Preservative Basecoat[†](BP)[†]

A quick drying water-based preservative basecoat, ideal for use on bare wood

WATER-BASED

DATA SHEET 614



Key Benefits

Preserves, penetrates and seals. Protects against blue stain, rot and UV rays

Water-Based



Pack sizes	1L, 2.5L
Touch dry	2 hours dependent on temperature and humidity
Recoatable	Up to 24 hours.
Coverage	Smooth wood: 4-5m ² /litre/coat (2 even coats)

- Provides a sound base for a variety of exterior woodcare top coat finishes

[†]See back cover for full details.

Dulux Trade
Classic Select Woodstain

A low build, matt, semi-transparent woodstain ideal for large areas such as cladding, facias and soffits

SOLVENT-BASED

DATA SHEET 609



Key Benefits

Offers up to 4 years exterior protection. Deep penetrating woodstain which will not blister or flake



Colour range	Available in 21 natural wood and 18 designer colours including 4 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 14m ² /litre/coat (normally 2 coats). Rough sawn wood: up to 8m ² /litre/coat

- Suitable for smooth planed wood and rough sawn timber

NB. For new wood, use with **Aquatech Preservative Basecoat[†](BP)[†]**

[†]See back cover for full details.

Dulux Trade
Yacht Varnish

A durable, solvent-based clear varnish ideal for hardwood doors

SOLVENT-BASED

DATA SHEET 608



Key Benefits

Up to 3 years protection. Durable and flexible film which resists flaking and peeling.



Colour range	Clear gloss
Pack sizes	1L, 2.5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m ² /litre/coat (normally 2-3 coats on new/bare wood)

- Contains UV filters which protect against strong sunlight

N.B. For new wood, use with **Aquatech Preservative Basecoat[†](BP)[†]**

[†]See back cover for full details.



Dulux Trade
Protective Woodsheen Woodstain

A semi-transparent woodstain, ideal for interior joinery and doors

SOLVENT-BASED
DATA SHEET 605



Key Benefits

Durable – offers up to 4 years protection for interior doors, trim and joinery. Stain resistant finish



Colour range	Available in 21 natural wood and 18 designer colours including 5 ready-mixed colours
Pack sizes	1L, 2.5L, 5L
Touch dry	4-6 hours
Recoatable	16 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 2 coats)

- Suitable for hardwoods and softwoods
- Provides a durable finish to resist wear-and-tear

Dulux Trade
Diamond Glaze Varnish

A water-based lacquer for maximum durability, ideal for floors, doors, trim, furniture and joinery

WATER-BASED
DATA SHEET 616



Key Benefits

For all high wear interior wood surfaces, especially floors. Up to 10 times tougher than conventional varnish*. Water-based and quick drying - recoat in 2-4 hours

Durability



Colour range	Clear gloss and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)**
Pack sizes	1L, 2.5L, 5L
Touch dry	1-2 hours ^o
Recoatable	2-4 hours
Coverage	Smooth wood: up to 25m ² /litre/coat (normally 2-3 coats on new/bare wood)

- Resistant to common chemicals, alcohol and water

*10 times tougher than conventional varnish, based on hardness tests undertaken with the use of Research Equipment London (REL) testing equipment. ** Depth of colour: Clear finish: Apply three finishing coats of clear satin or gloss Translucent Colour: Apply one coat of clear gloss followed by one coat of colour followed by one coat of clear (satin or gloss). Deeper colour: Apply one coat of clear gloss followed by two coats of colour.

^o Light foot traffic is possible after 24 hours but to prevent possible damage to the floor while the full mechanical resistance develops, avoid heavy wear and do not replace carpet or rugs or move furniture for at least 7 days after application.

Dulux Trade
Danish Oil

A natural oil that permeates the wood surface, ideal for interior and exterior furniture and joinery

SOLVENT-BASED
DATA SHEET 620



Key Benefits

Water-resistant, clear matt finish. Suitable for both internal and external hardwoods and softwoods



Colour range	Clear
Pack sizes	1L, 2.5L
Touch dry	2-4 hours
Recoatable	Min. 6 hours
Coverage	Up to 6m ² /litre depending on porosity of the wood

- Application with brush or cloth



WOODCARE

Dulux Trade Quick Dry Varnish

A quick drying interior varnish, ideal for doors, trim, furniture and joinery

WATER-BASED
DATA SHEET 604



Key Benefits

Contains Polyurethane. Touch dry in 30 minutes, recoat in 2 hours

Water-Based

Quick Drying



Colour range	Clear gloss, matt and satin finishes. Also available in 21 natural wood and 18 designer colours (colours only available in satin finish)
Pack sizes	1L, 2.5L
Touch dry	30mins
Recoatable	2 hours
Coverage	Smooth wood: up to 20m ² /litre/coat (normally 1-2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

Dulux Trade Polyurethane Varnish

A high-build interior varnish, ideal for doors, trim, furniture, joinery and floors*

SOLVENT-BASED
DATA SHEET 607



Key Benefits

Clear solvent-based finish. Withstands knocks, scuffs and spills



Colour range	Clear gloss, matt and satin finishes
Pack sizes	1L, 2.5L, 5L
Touch dry	6-8 hours
Recoatable	16-24 hours
Coverage	Smooth wood: up to 16m ² /litre/coat (normally 1-2 coats)

- Can be used on bare or previously varnished surfaces or over wood dye

*Light wear only.

4
YEAR
PROTECTION



BRING OUT THE BEST WITH 4 READY-MIXED COLOURS

LIGHT
OAK

TEAK

RICH
MAHOGANY

ROSEWOOD



Trust Dulux Trade for Woodcare
TRY IT TODAY

IT'S YOUR REPUTATION

AkzoNobel

PRE-DECORATIVE PRODUCTS

Polycell Trade is a comprehensive range of trade formulated pre-decorative products, created to help professionals get the sure foundation you need for high quality paint and wallpaper finishes, as well as being practically designed for everyday use.

Pre-decorative Products	Place of application					Paintable	Composition	
	Level of Damage to Surface				Problem Areas			
	Minor Imperfections (Interior Only)	Medium Sized Imperfections		Large or Deep Imperfections				Stained Surfaces
		Interior	Exterior	Interior	Exterior			
Polyfilla Easy Sand Interior Filler		✓				Up to 24 hours	Powder	
Polyfilla Exterior Filler			✓			Up to 24 hours	Powder	
Polyfilla All Purpose		✓	✓			Up to 24 hours	Powder/ Ready-mixed	
Polyfilla Deep Hole				✓	✓	30 minutes	Ready-mixed	
Polyfilla One Fill				✓	✓	From 15 minutes	Ready-mixed	
Polyfilla Fine Surface	✓					1 hour	Ready-mixed	
Polyfilla Quick Drying Filler	✓					10 minutes	Ready-mixed	
Polyfilla Woodflex		✓	✓			Up to 24 hours	Ready-mixed	
Polyfilla Decorators Caulk		✓	✓			1 hour	Ready-mixed	
Polyfilla Expanding Foam				✓	✓	4 hours	Ready-mixed	
Polycell Stain Block					✓	10 mins/ 12 hours	Solvent-based	

PRE-DECORATIVE PRODUCTS

Polyfilla Easy Sand Interior Filler

POWDER

DATA SHEET 119/120

For indoor repairs to plaster, plasterboard, wood, brick, stone and most other building materials



Key Benefits

Easy to apply and long working time.
Easy to sand to a very smooth finish



Pack sizes	2kg, 5kg, 10kg
Paintable	Up to 24 hours
Set time	2.5 hours depending on surface, temperature, relative humidity and depth of fill.
Working time	90 minutes
Mix ratio	2 parts filler to 1 part water

- Sands down easily in a fraction of time, so jobs can be finished more quickly and with a perfect result
- Ideal for painting because it's resistant to flashing and grinning
- Accepts nails and screws

PRE-DECORATIVE PRODUCTS

Polyfilla All Purpose

POWDER &
READY-MIXED

DATA SHEET 112/113

For indoor and outdoor repairs to most building materials



Key Benefits

Smooth, easy to sand. Dries white,
will not shrink or crack



Pack sizes	Ready-Mixed: 1kg, 2kg Powder: 2kg, 5kg, 10kg
Paintable	Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. Ready Mixed 1cm layers will be surface dry in about 1 hour
Set time	Up to 4 hours depending on surface, temperature, relative humidity and depth of fill

- Accepts nails and screws
- Strong adhesion

Polyfilla Exterior Filler

POWDER

DATA SHEET 115

Based on high strength cement and special resins to promote powerful adhesion, toughness and impact resistance



Key Benefits

Rock hard finish, good impact resistance



Pack sizes	2kg
Paintable	Up to 24 hours
Set time	1 hour depending on surface, temperature, relative humidity and depth of fill
Working time	30 minutes
Mix ratio	4.5 parts of filler to 1 part water

- Strong adhesion, accepts fixings, nails and screws
- Always use an alkali-resistant primer before application
- Easy to sand

Polyfilla Deep Hole

READY-MIXED

DATA SHEET 129/130

Fills holes up to 50mm deep in one application and is ready to paint from 30 minutes



Key Benefits

A structural filler for deep holes. No shrinking,
cracking or sagging



Pack sizes	1kg
Paintable	From 30 minutes
Mix ratio	1:1, 2 part pack

- Accepts screws and nails
- Smooth finish
- Ultimate ease of sanding
- Interior and exterior use

PRE-DECORATIVE PRODUCTS

Polyfilla One Fill

A lightweight filler designed to fill deep repairs in one application without sagging or slumping - even on ceilings

READY-MIXED

DATA SHEET 121



Key Benefits

Smooth finish - no need to sand



Pack sizes 600ml, 1L, 4L

Paintable 15 minutes depending on surface, temperature, relative humidity and depth of fill

- Millions of microscopic glass beads give no-sag characteristics
- Will not shrink or crack
- Not structural
- For interior and exterior use

PRE-DECORATIVE PRODUCTS

Polyfilla Quick Drying Filler

For small interior jobs when you're in a hurry

READY-MIXED

DATA SHEET 122



Key Benefits

Can be used straight from the tube. Ideal for small interior jobs when you are in a hurry



Pack sizes 330g tube

Paintable Set in as little as 10 minutes

- Sands easily
- Will not shrink or crack
- Fills hairline cracks

Polyfilla Fine Surface

For filling minor to medium sized cracks, surface imperfections and open woodgrain on interior surfaces

READY-MIXED

DATA SHEET 116



Key Benefits

Extra adhesive strength grips the surface and allows fine feathering



Pack sizes 500g, 1.75kg

Paintable 30 to 60 minutes depending on surface and surrounding conditions

- Sands to a glass-smooth finish
- No need to prime - over-paint in an hour

Polyfilla Woodflex

Flexible, water-resistant filler that bonds strongly to wood

READY-MIXED

DATA SHEET 124/125



Key Benefits

Can be painted or stained. Interior and exterior use



Pack sizes 330g tube, 600ml tub

Paintable Up to 24 hours depending on surface, temperature, relative humidity and depth of fill. 1cm thick layers will be surface dry in about 2 hours

- Dries to a smooth and flexible finish
- Water-resistant finish will not shrink or crack
- Easy to use and sand
- Specially formulated to fill holes of any depth or size

PRE-DECORATIVE PRODUCTS

Polyfilla Decorators Caulk

READY-MIXED

DATA SHEET 103/104/131

Water resistant, flexible acrylic sealant for interior and exterior applications



Key Benefits

Smooth finish - no need to sand



Pack sizes	290ml (white only) and 380ml (all colours)
Paintable	1 hour depending on surface, temperature, relative humidity and depth of fill
<ul style="list-style-type: none"> Available in White, Magnolia and Brown 	

PRE-DECORATIVE PRODUCTS

Polycell Stain Block

SOLVENT-BASED

DATA SHEET 107/108

Permanently blocks most problem stains and prevents bleeding through after decoration



Key Benefits

The aerosol can be overpainted in about 10 minutes. Treats stains caused by water, nicotine, soot, graffiti, grease, wax and rust



Pack sizes	500ml, 1L, 2.5L
Touch dry	2-3 hours
Paintable	Liquid: 12 hours. Aerosol: 10 minutes
Coverage	Liquid: 7.9m ² per litre. Aerosol: 0.8m ² per 250ml
<ul style="list-style-type: none"> Available as conventional paint or aerosol For interior use 	

Polyfilla Expanding Foam

READY-MIXED

DATA SHEET 114/132

Expands to fill large holes and gaps, inside and outside



Key Benefits

Expands up to 45 times can volume. Easy to cut, sand, paint and plaster. Strong, long-lasting, damp-resistant seal



Pack sizes	750ml
Paintable	Can be cut after 30 minutes and sanded, plastered or painted after 3-4 hours
<ul style="list-style-type: none"> Will not shrink when cured 	

Polycell Extra Strong Paste

FLAKES

DATA SHEET 106

Instantly mixes to a smooth paste offering easy slippage and excellent wet tack



Key Benefits

Instant mix to smooth paste. Long working time, easy slip, excellent wet tack. Extra strong adhesion. Low salt content means improved stain prevention



Pack sizes	10 and 30 rolls
Coverage	Normal = 8-10 rolls per sachet. Heavy = 3-4 rolls per sachet
Drying time	14-18 hours
<ul style="list-style-type: none"> Dries to a smooth and flexible finish Water-resistant finish will not shrink or crack Easy to use and sand Specially formulated to fill holes of any depth or size 	

PRE-DECORATIVE PRODUCTS

Polycell Ready-Mixed Adhesive

Low water content makes it ideal for wallcoverings prone to shrinkage. Easy to use straight from the tub

READY-MIXED

DATA SHEET 128



Key Benefits

Easy to use straight from the tub. High initial wet tack resulting in strong final adhesion



Pack sizes	4.5kg
Coverage	1 roll per kg
Drying time	14-18 hours

- Excellent slip, long open time
- Low water content means ideal for wallcoverings prone to shrinkage
- To get the best results make sure the surfaces to be papered are sound, clean and dry. (New surfaces particularly must be fully dry)
- For interior use

ALL THE HELP YOU NEED TO PICK THE PERFECT COLOUR



DULUX TRADE PROFESSIONAL COLOUR GUIDE

Updated annually to offer the right balance of new shades alongside traditional favourites, this key colour tool also offers inspiration and topline product information for your clients.



HERITAGE COLOUR GUIDE

The heritage range is a collection of beautiful colours that will complement any space, providing authentic period detail in today's high performance finishes.



WEATHERSHIELD PROFESSIONAL COLOUR GUIDE

Available in a wide range of colours, **Weathershield** products offer unbeatable protection for exterior masonry, wood and metal trim.



WOODCARE COLOUR GUIDE

Showcasing a stunning range of toned, bold and bright colour choices, our Woodcare Colour Guide has the perfect shade for every project, inside and out.



DULUX TRADE VISUALIZER

Our unique Visualizer tool within the **Dulux Trade** Paint Expert app shows customers exactly how their chosen colours will look on their wall in real time. Download it today.



To find out more about colour, visit
duluxtradepaintexpert.co.uk/colours

TAKE YOUR BUSINESS TO THE NEXT LEVEL

There's no surer way to attract better quality jobs and give your business a brighter future than by becoming a member of the **Dulux Select Decorators** scheme. For just £195 ex VAT per year (full membership) or £130 ex VAT per year (associate membership) you can:

- Join the UK's nationwide decorating elite
- Reassure customers that your work has been assessed by **Dulux** and meets the highest standards
- Receive the ultimate business toolkit, with the **Dulux Select Decorators** logo on your vehicle, stationery and website
- Provide a 2-year **Dulux** workmanship guarantee
- Get free training for yourself and your employees
- Enjoy regular discounts on **Dulux Trade** products



If you've worked as a professional decorator for 3 years and been in business for at least a year, you're eligible to join the **Dulux Select Decorators** Scheme.

Find out more today. Call **0333 222 7022** or visit **duluxselectdecorators.co.uk**

A BRIGHTER FUTURE AS A CONTRACTOR

Become a member of the **Dulux Trade Contract Partnership** scheme and your business will tick all the boxes when it comes to winning larger commercial and public sector projects. It's the UK's leading membership scheme for independently assessed, quality assured painting contractors. A clear demonstration of your commitment to:

- Consistently high quality workmanship
- Reliably outstanding professional service
- Continuous improvement
- Value for money
- Meeting sustainability goals



When building contractors, property owners and specifiers need a decorating project completed right first time, on time, on budget and with no room for error, they know they can rely on a **Dulux Trade** Contact Partner.

For more information, visit **contractpartnership.co.uk**

QUICK REFERENCE GUIDE

Product

Alkali Resisting Primer.....	12	Protective Woodsheen Woodstain.....	62
All Purpose Primer.....	11	Pyroshield Basecoat.....	48
Aluminium Wood Primer.....	9	Pyroshield Durable Eggshell.....	49
Anti-Graffiti Clearcoat.....	53	Pyroshield Durable Matt.....	49
Anti-Graffiti Primer.....	52	Quick Dry Gloss.....	30
Aquatech Preservative Basecoat ^(BP)	60	Quick Dry MDF Primer Undercoat.....	9
Blockfiller Plus.....	47	Quick Dry Opaque.....	59
Cellar Paint.....	55	Quick Dry Satinwood.....	31
Cladshield.....	48	Quick Dry Undercoat.....	30
Classic Select Woodstain.....	61	Quick Dry Varnish.....	64
Danish Oil.....	62	Quick Dry Woodstain.....	59
Diamond Eggshell.....	22	Quick Dry Wood Primer Undercoat.....	8
Diamond Glaze Varnish.....	63	Satinwood.....	28
Diamond High Performance Eggshell.....	23	Stain Block Primer.....	13
Diamond Matt.....	22	Sterishield Diamond Eggshell.....	46
Dry Fall Eggshell.....	47	Sterishield Diamond Matt.....	46
Drywall Primer Sealer.....	12	Super Grip Primer.....	13
Durable Flat Matt.....	21	Supermatt.....	18
Ecosure Gloss.....	26	Ultimate Opaque.....	58
Ecosure Matt.....	21	Ultimate Woodstain.....	58
Ecosure Undercoat.....	26	Ultra Grip Primer.....	14
Eggshell.....	28	Ultra Matt.....	19
Fast Matt.....	18	Undercoat.....	27
Floorshield.....	51	Vinyl Matt.....	19
High Gloss.....	27	Vinyl Silk.....	20
High Performance Floor Paint.....	51	Vinyl Soft Sheen.....	20
Line Marking Paint.....	52	Weathershield All Seasons Masonry Gloss.....	38
Metalshield Gloss.....	50	Weathershield All Seasons Smooth Masonry.....	37
Metalshield Quick Dry Metal Primer.....	10	Weathershield Exterior Flexible Filler.....	42
Metalshield Satin.....	50	Weathershield Exterior Flexible Undercoat.....	40
Metalshield Zinc Phosphate Primer.....	10	Weathershield Exterior High Gloss.....	41
Mordant Solution.....	11	Weathershield Maximum Exposure Smooth Masonry.....	37
Mouldshield Fungicidal Eggshell.....	54	Weathershield Multi-Surface Fungicidal Wash.....	42
Mouldshield Fungicidal Matt.....	54	Weathershield Preservative Primer ^(BP)	40
New Work Gloss.....	29	Weathershield Quick Dry Exterior Gloss.....	39
New Work Undercoat.....	29	Weathershield Quick Dry Exterior Satin.....	39
Polycell Extra Strong Paste.....	73	Weathershield Quick Dry Exterior Undercoat.....	38
Polycell Ready-Mixed Adhesive.....	74	Weathershield Smooth Masonry.....	36
Polycell Stain Block.....	73	Weathershield Stabilising Primer.....	41
Polyfilla All Purpose.....	69	Weathershield Textured Masonry.....	36
Polyfilla Decorators Caulk.....	72	Wood Primer.....	8
Polyfilla Deep Hole.....	69	Yacht Varnish.....	61
Polyfilla Easy Sand Interior Filler.....	68		
Polyfilla Expanding Foam.....	72		
Polyfilla Exterior Filler.....	68		
Polyfilla Fine Surface.....	70		
Polyfilla One Fill.....	70		
Polyfilla Quick Drying Filler.....	71		
Polyfilla Woodflex.....	71		
Polyurethane Varnish.....	64		