



WOOD FINISHES
KNOWLEDGE AND ADVICE

OVERVIEW

ABOUT OSMO – WOOD MEETS COLOUR 4 – 7

Our wood finishes – the advantages at a glance	4
One system combining all advantages	5
Other systems in comparison	5
Wood needs care and protection	6
The application – easy and sure	7

INTERIOR 8 – 27

PRODUCT FINDER	10 – 11
Sanding Sequences for Oiled Surfaces	12 – 13
Polyx®-Oil Original	14
Polyx®-Oil Effect Natural	14
Polyx®-Oil Rapid	15
Polyx®-Oil Anti-Slip/Anti-Slip Extra	15
Polyx®-Oil Express	16
Hardener for Polyx®-Oil Express	16
Polyx®-Oil 2K Pure	17
Wood Wax Finish Clear Extra Thin	17
Polyx®-Oil Tints	18
Polyx®-Oil Effect Silver / Gold	18
Oil Stain	19
Hardener for Oil Stain	19
Recommendations for wood species	20
Spray Wax	21
Wood Wax Finish	22 – 23
TopOil	23
Wood Protector	24
Maintenance Oil	24
Interior Wax	25
Uviwax® UV-Protection	25
Maintenance Kit for Floors	26
Liquid Wax Cleaner	26
Intensive Cleaner	27
Wash and Care	27
Spray Cleaner	27



EXTERIOR 28 – 41

PRODUCT FINDER 30 – 31

Decking Oils	32
Anti-Slip Decking Oil	33
End Grain Sealing Wax	33
Teak-Oil-Spray	34
Garden Furniture Maintenance Kit	34
UV-Protection Oil/ UV-Protection Oil Extra	35
UV-Protection Oil Tints	35
Natural Oil Woodstain	35
Natural Oil Woodstain Effect	37
One Coat Only HS ^{PLUS}	37
Country Colour	38
Opaque Gloss Wood Stain	39
WR Base Coat	40
Decking Cleaner	40
Polymer Composite Cleaner	40
Wood Reviver Power-Gel	41
Gard Clean	41
Spray Cleaner	41

TOOLS / ACCESSORIES 42 – 50

PRODUCT FINDER 44 – 45

Wood Filler	46
Wood Putty	46
Resin Remover Set	46
FloorXcenter	47
Decking and Flooring Cleaning Machine	47
Spray-Mop	47
Telescopic Handle	48
Floor Brush with Handle	48
Floor Roller Set	48
Pad Holder with joint	48
Cleaning Kit for floors	49
Roller and Brush Set	49
Decking Cleaning Brush with Handle	49
Decking Brush with Handle	49
Decking Brush Set	49
Flat Brush	50
Hand Pad Holder	50
Double Blade Scraper	50
Professional Scraper	50
Easy Clean	50
Easy Pads	50
Brush Cleaner and Thinner	50
Stirring Stick	50

OUR WOOD FINISHES – THE ADVANTAGES AT A GLANCE

SIMPLE APPLICATION



- > Oil based finishes adhere without any primer
- > Thin coats are sufficient and increase product coverage
- > Excellent hiding thanks to high solids content
- > No brushstrokes thanks to long pot time
- > Seamless applications also possible on larger areas
- > No need to thin wood finishes

ADVAVANTAGES OF MICROPORES



- > Oils fill the pores of wood and protect against waterlogging, which damages wood. However they do not form an impermeable film. Wood stays microporous and continues to absorb and release water without any damage.
- > Microporous wood can breathe and improves air quality. Due to its anti-static properties, it is very good for allergy sufferers.

NATURAL INGREDIENTS



- > All Osmo wood finishes are based on oils and waxes: sunflower oil, carnauba and candelilla waxes, linseed, soya and thistle oils.
- > Oils retain the value of the natural raw material wood.
- > For a natural, environmentally friendly and safe coating.
- > Pigments are approved for use in the food industry.
- > Based on purified, renewable plant raw materials.
- > The binding agents in Osmo wood finishes are based on natural plant oils that deeply penetrate wood and protect it from inside.

ONE SYSTEM, ALL ADVANTAGES COMBINED



OIL AND WAX-BASED FINISHING SYSTEM

- > Protects the wood from the inside
- > Does not form a film
- > Forms a protective, microporous surface

Advantages

- > The finish penetrates deeply into wood and protects the surface
- > Enhances the natural wood colour
- > Spot repairs can be carried out easily
- > Does not crack, flake or peel
- > Great liquid resistance
- > Easy to maintain

OTHER SYSTEMS IN COMPARISON



TRADITIONAL OIL-BASED FINISHING SYSTEM


- > Protects the wood from the inside
- > Does not form a film
- > Does not form a protective surface

Advantages of an oil-based finish

- > The oil penetrates deeply into wood and networks with it
- > Enhances the natural wood colour
- > Spot repairs can be carried out easily
- > Does not crack, flake, or peel

Disadvantages of an oil-based finish

- > Insufficient liquid resistance
- > Time-consuming maintenance



LACQUER AND WATER-BASED FINISHING SYSTEM

- > Protects the wood from the outside
- > Forms a film
- > Forms a thick layer

Advantages of a water-based finish

- > Good liquid resistance
- > Protects against wear
- > Easy maintenance

Disadvantages of a water-based finish

- > Renovation is only possible after sanding
- > Spot repairs are not possible
- > The finish cracks, flakes and peels

WOOD NEEDS CARE AND PROTECTION

SO THE JOYS OF WOOD LAST A LONG TIME



UV RADIATION

Over the course of time, natural UV radiation in sunlight greys wood and makes it brittle.

MOISTURE / WATERLOGGING

In outdoor areas, water facilitates wood decay and in indoor areas it causes unsightly spots.

ALGAE AND FUNGAL ATTACK

These micro-organisms form dark spots and can eventually destroy wood substance.

WOOD-DESTROYING INSECTS

They feed on wood and damage the substance.

FILM-FORMING FINISHES

They lock moisture into wood. Before recoating they must be removed through time-consuming sanding works. Wood treated with Osmo wood finishes can be recoated without any sanding.

CONSTRUCTION AND PROCESSING

For timber construction and processing, there are some important details to keep in mind: Wood, for example, should have the possibility to dry quickly, and end grains should be protected.

BENEFIT FROM OUR ADVICE



CONSTRUCTIONAL WOOD PROTECTION

In outdoor areas, timber used in construction needs to stay as dry as possible and be able to dry off quickly again. In indoor areas, wooden flooring can be protected by dirt-catching zones, such as mats or felt lining.

PHYSICAL WOOD PROTECTION

Wood finishes offer good protection against UV rays, rain and moisture.

CHEMICAL WOOD PROTECTION

Active biocidal ingredients offer protection against algae, fungi, insects and mould. With good constructional and physical protection, wood can often go without this kind of chemical protection.

THE APPLICATION – EASY AND SURE



HIGH COVERAGE

- > High content of pigments
- > High content of oil
- > Finished with the first or second coat - without any primer
- > A thin coat is sufficient



RECOATABILITY

Advantages for indoor areas

- > Spot repairs are carried out by sanding off the surface and recoating with Polyx®-Oil: for scuff marks, deep scratches or general damage.

Advantages for outdoor areas

- > Osmo wood finishes do not peel, instead they weather away over the course of time. Therefore it is possible to recoat without any sanding beforehand.



SURFACE PREPARATION

- > Completely sand off lacquers before applying Osmo wood finishes.
- > Oil based finishes from other manufacturers can usually be recoated after cleaning the surface.

FOR SURFACES TREATED WITH OSMO WOOD FINISHES

Indoor areas

- > Remove any dust and care product residues

Outdoor areas

- > Remove any dirt and debris



COLOUR & PROTECTION FOR THE INTERIOR



Colour creates a
good atmosphere
in every room:
in the office,
bedroom or dining
room.



COLOUR & PROTECTION FOR THE INTERIOR

FLOORING



POLYX®-OIL
ORIGINAL
(Page 14)



POLYX®-OIL
EFFECT NATURAL
(Page 14)



POLYX®-OIL
RAPID
(Page 15)



POLYX®-OIL
**ANTI-SLIP /
ANTI-SLIP EXTRA**
(Page 14)



POLYX®-OIL
EXPRESS
(Page 16)



**HARDENER FOR
POLYX®-OIL EXPRESS**
(Page 16)



POLYX®-OIL
2K PURE
(Page 17)



**WOOD WAX FINISH
CLEAR EXTRA THIN**
(Page 17)



POLYX®-OIL
TINTS
(Page 18)



POLYX®-OIL
**EFFECT
SILVER / GOLD**
(Page 18)



OIL STAIN
(Page 19)



**HARDENER
FOR OIL STAIN**
(Page 19)



WOOD WAX FINISH
(Page 22 – 23)

CARE AND CLEANING



MAINTENANCE OIL
(Page 24)



**LIQUID WAX
CLEANER**
(Page 26)



**MAINTENANCE KIT
FOR FLOORS**
(Page 26)



INTENSIVE CLEANER
(Page 27)



WASH AND CARE
(Page 27)



SPRAY CLEANER
(Page 27)

FURNITURE / WALLS / CEILINGS



WOOD WAX FINISH
CLEAR EXTRA THIN
(Page 17)



POLYX®-OIL
EFFECT
SILVER / GOLD
(Page 18)



SPRAY-WAX
(Page 21)



WOOD WAX FINISH
(Page 22 – 23)



TOPOIL
(Page 23)



WOOD PROTECTOR
(Page 24)




UVI-WAX®
UV-PROTECTION
(Page 25)



INTERIOR-WAX
(Page 25)




SANDING SEQUENCES FOR OILED SURFACES

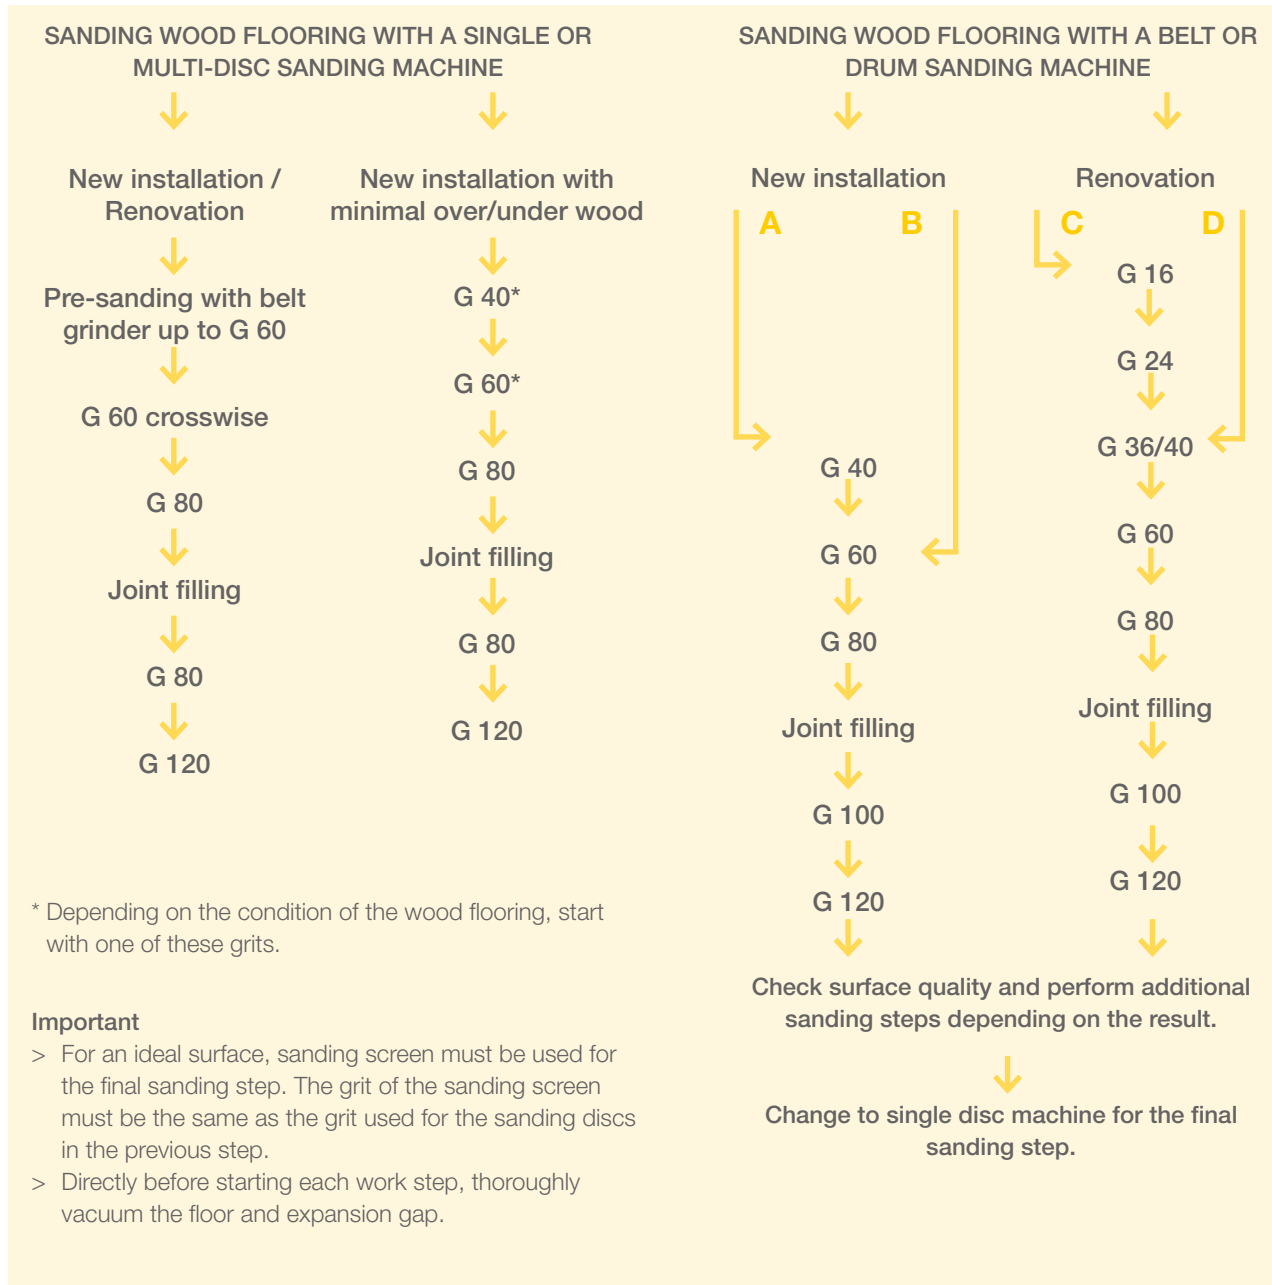

WELL-PREPARED FOR PERFECT RESULTS

Perfect sanding is an absolute must for a clean and attractive surface finish. Generally speaking, just like lacquering, before applying Polyx®-Oil, Wood Wax Finish or Oil Stain, wooden flooring has to be sanded with a fine grit. The graphics show our recommended sanding sequences. The deeper the sanding marks are, the more noticeable the indentations and irregularities will appear. This effect is even

SAND WOOD FLOORING WITH AN EDGE SANDER

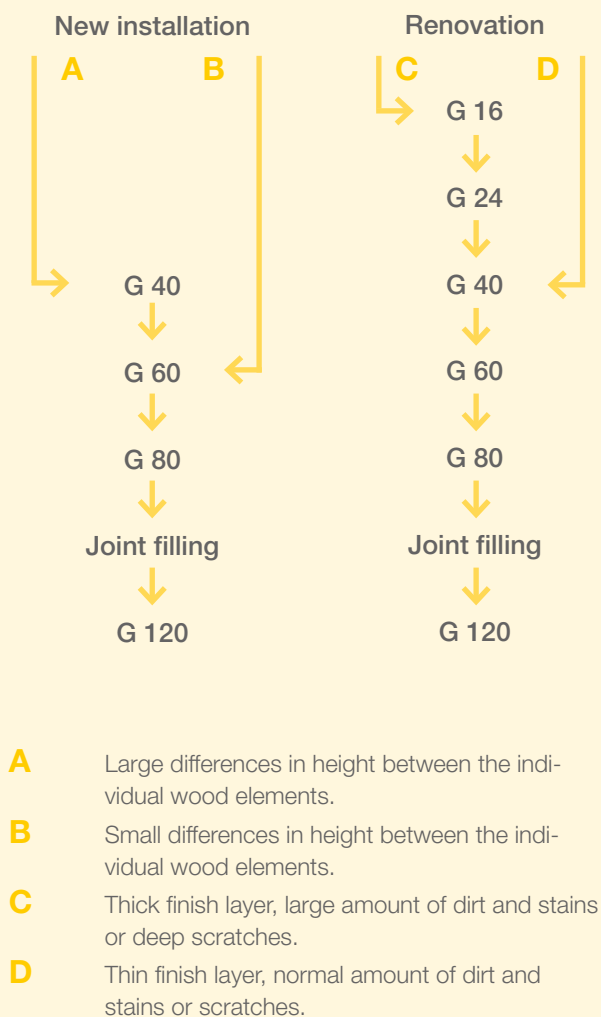

Important

To keep the transition area between the edge and the remaining field area from being noticeable, the following sanding step sequence has to be maintained: For the field sanding with a drum or belt sanding machine and the for the subsequent sanding step with the edge sanding machine, always use the same grit:

Example:

1. Field **G 24**
- ↓
2. Edge **G 24**
- ↓
3. Field **G 40**
- ↓
4. Edge **G 40**

Example:

1. Edge **G 60**
- ↓
2. Field **G 60**
- ↓
3. Edge **G 80**
- ↓
4. Field **G 80**

For field sanding with a single disc or three-disc sanding machine, always use the same grit as in the previous sanding steps with the edge sanding machine.

Source: Eugen Lägler GmbH, "Sanding of Wooden Floors", The Manual, 1 Sept 2013

more visible with colour treatments as the pigments collect in the sanding marks. It should be decided on site once the last sanding step is completed whether the sanding quality is sufficient for the planned surface treatment.

Depending on the wood species and the applied product, we recommend grit 120 for clear surfaces,

G 120 to G 150 for coloured surfaces and G 150 for Polyx-Oil® 2K. Contaminants such as greases, oils or cleaning agents must be carefully removed as they can influence the bonding of the wood surface with the finish.



COLOUR & PROTECTION FOR THE INTERIOR



POLYX®-OIL ORIGINAL

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3011 Clear Glossy	0.375	103 00 161	4	
	0.75	103 00 162	4	
	2.50	103 00 163	2	
	10.00	103 00 164	1	
	25.00	103 00 165	1	
3032 Clear Satin	0.375	103 00 023	4	
	0.75	103 00 001	4	
	2.50	103 00 002	2	
	10.00	103 00 003	1	
	25.00	103 00 004	1	
3062 Clear Matt	0.375	103 00 043	4	
	0.75	103 00 045	4	
	2.50	103 00 050	2	
	10.00	103 00 055	1	
	25.00	103 00 057	1	
3065 Clear Semi-matt	0.375	111 00 118	4	
	0.75	111 00 119	4	
	2.50	111 00 120	2	
	10.00	111 00 121	1	
	25.00	111 00 108	1	



MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 8 – 10 hours (normal climatic conditions, 23 °C/ 50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m².
6. Drying time approx. 8 – 10 hours; see point 3.

Note:

Also available with Solas certification for the shipbuilding industry or as an anti-slip variant (R9/ R11)

RECOMMENDED USE

Osmo Polyx®-Oil Original is ideal for the protection of all wooden floors, such as solid wood, plank, strip, OSB and cork flooring, as well as furniture surfaces.

Note: please observe our recommendations for wood species on page 20.

ADVANTAGES

- > Very tough and hard-wearing
- > Resistant to saliva and perspiration, suitable for children's toys
- > Suitable for wood and microporous
- > Resistant to coffee, wine and cola
- > Spot repairs possible

TOOLS



POLYX®-OIL EFFECT NATURAL



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3041 Natural	0.75	103 00 069	4	
	2.50	103 00 073	2	



MANUAL PROCESSING

Finished surface in 2 days, 2 coats

(1st Polyx®-Oil Effect Natural, 2nd clear Polyx®-Oil)

1. First coat on the raw, sanded wood approx. 30 ml/m².
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 24 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m² with clear Polyx®-Oil.
6. Drying time approx. 8 – 10 hours; see point 3.

RECOMMENDED USE

Osmo Polyx®-Oil Effect Natural is suitable for the protection and nearly invisible coating of lightly coloured wood in indoor areas, such as wooden flooring and furniture surfaces.

Note: please observe our recommendations for wood species on page 20.

ADVANTAGES

- > Lightly coloured wood stays lightly coloured
- > Nearly invisible protection, no "permanent wet effect"
- > Suitable for wood and microporous
- > Resistant to saliva and perspiration, suitable for children's toys
- > Resistant to coffee, wine and cola

TOOLS



POLYX®-OIL RAPID



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3232 Clear Satin	0.75	103 00 093	4	
	2.50	103 00 092	2	
	10.00	103 00 091	1	
3262 Clear Matt	0.75	103 00 101	4	
	2.50	103 00 098	2	
	10.00	103 00 097	1	
3240 White transparent	0.75	151 00 512	4	
	2.50	151 00 513	2	
	10.00	151 00 518	1	

Also available in 25 L canisters upon request.

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 4 - 5 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m².
6. Drying time approx. 4 - 5 hours; see point 3.

RECOMMENDED USE

Osmo Polyx®-Oil Rapid is ideal for the protection of all wooden floors, such as solid wood, plank, strip, OSB and cork flooring, as well as for furniture surfaces.

Note: please observe our recommendations for wood species on page 20.

ADVANTAGES

- > Fast drying
- > Very tough and hard-wearing
- > Resistant to saliva and perspiration, suitable for children's toys
- > Suitable for wood and microporous
- > Resistant to coffee, wine and cola
- > Spot repairs possible

TOOLS



POLYX®-OIL ANTI-SLIP / ANTI-SLIP EXTRA



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3088 Clear Semi-matt R9 slip-resistant	0.75	104 00 077	4	
	2.50	104 00 078	2	
	10.00	104 00 079	1	
3089 Clear Satin R11 extra slip-resistant	0.75	104 00 095	4	
	2.50	104 00 096	2	
	10.00	104 00 097	1	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 8 - 10 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m².
6. Drying time approx. 8 - 10 hours; see point 3.

Note: Osmo Polyx®-Oil Anti-Slip/Polyx®-Oil Anti-Slip Extra cannot be evened out with a single disc machine with white pad.

RECOMMENDED USE

Osmo Polyx®-Oil Anti-Slip is ideal for the protection all wooden floors for which higher slip resistance is required (commercial/public interiors), such as solid wood, plank, strip, OSB and cork flooring.

Note: please observe our recommendations for wood species on page 20.

ADVANTAGES

- > Especially for public interiors
- > Very tough and hard-wearing
- > Resistant to saliva and perspiration, suitable for children's toys
- > Suitable for wood and microporous
- > Resistant to coffee, wine and cola
- > Spot repairs possible

TOOLS



Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. brushed or structured, may lead to reduced coverage. Results may vary depending on wood species and properties (e.g. surface). Therefore a trial application is recommended.



COLOUR & PROTECTION FOR THE INTERIOR



POLYX®-OIL EXPRESS



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3332 Clear Satin	0.75	103 00 132	4	
	2.50	103 00 134	2	
	10.0	103 00 136	1	
	25.0	103 00 138	1	
3362 Clear Matt	0.75	103 00 282	4	
	2.50	103 00 284	2	
	10.0	103 00 286	1	
	25.0	103 00 288	1	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 10 minutes after the first application.
3. Drying time approx. 2 -3 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m².
6. Drying time approx. 2 - 3hours; see point 3.

Note: Can be used optionally with the Hardener for Polyx®-Oil Express 6632 as drying accelerator.

RECOMMENDED USE

Osmo Polyx®-Oil Express is suitable for the protection of all wooden flooring, such as solid wood, plank, strip, OSB and cork flooring, as well as furniture surfaces.

In combination with Hardener 6632, also suitable for the clear treatment of hardwoods rich in extractives, such as Meranti, Wengé, Merbau etc.

ADVANTAGES

- > Very fast drying
- > Very tough and hard-wearing
- > Applications with and without hardener
- > Resistant to saliva and perspiration, suitable for children's toys
- > Suitable for wood and microporous
- > Resistant to coffee, wine and cola
- > Suitable for hardwoods rich in extractives in combination with Hardener 6632
- > Spot repairs possible

TOOLS



HARDENER FOR POLYX®-OIL EXPRESS



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
6632 Clear	0.150	151 00 525	6	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. Open the bottle of Hardener and pour contents into the Polyx®-Oil Express can. Empty bottle completely. Stir thoroughly.
2. Processing to be carried out corresponds to that of Osmo Polyx®-Oil Express.
3. Drying time approx. 1 - 2 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation. (1st and 2nd coat)

Note: Pot time is reduced down to 90 minutes by adding Hardener. Please do not mix together more material than you can process with certainty within 60 minutes. If you do not use the entire can of Polyx®-Oil Express, add 6% Hardener – mix in a separate container.

RECOMMENDED USE

Osmo Hardener for Polyx®-Oil Express acts as an additive for Osmo Polyx®-Oil Express for accelerated drying.

ADVANTAGES

- > Shortened drying time
- > Ideal for public interiors
- > Ideal for hardwoods rich in extractives

TOOLS



POLYX®-OIL 2K PURE



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
6125 Clear	1.00	139 00 054	1	

MANUAL PROCESSING

- Osmo Polyx®-Oil 2K Pure is not ready to use. Shortly before application, add the hardener. Ensure that the complete contents of hardener are emptied into the wood finish and that the two components are thoroughly mixed. Do not thin. Attention: 4-6 hours after adding the hardener, the mixture is no longer to be used (pot life).
- With a double blade scraper, apply finish to the untreated wood thinly and evenly.
- Wait approx. 30-60 minutes until Poly®-Oil 2K Pure has completely penetrated the wood.
- Rub oil into the surface with a single disc machine with a green pad.
- Directly afterwards apply second coat (wet on wet), allow to penetrate and rub in.
- Subsequently even out surface with a single disc machine with a white pad. If the single disc machine leaves streaks on the floor due to excess material, turn pad over or replace it.
- Leave to dry for approx. 4 hours. The final hardness is achieved after approx. 24 hours.

RECOMMENDED USE

Osmo Polyx®-Oil 2K Pure is ideal for the protection of all wooden floors, such as solid wood, plank, strip, OSB and cork flooring, as well as furniture surfaces. Especially suitable for woods rich in extractives.

ADVANTAGES

- > Especially fast drying
- > Specifically for hardwoods rich in extractives (Teak, Jatoba, Smoked Oak etc.)
- > Very tough and hard-wearing
- > Resistant to saliva and perspiration, suitable for children's toys
- > Resistant to coffee, wine and cola
- > Spot repairs possible

TOOLS



WOOD WAX FINISH CLEAR EXTRA THIN



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
1101 Clear	0.75	102 00 001	4	
	2.50	102 00 002	2	
	25.00	102 00 003	1	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

- First coat on the raw, sanded wood approx. 35 ml/m².
- Allow to dry for 30 minutes. Wipe away all excess wax and touch up untreated areas.
- Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
- Second coat approx. 35 ml/m².
- Allow to dry for 30 minutes and wipe away all excess wax.
- Drying time approx. 12 hours; see point 3.


RECOMMENDED USE

Osmo Wood Wax Finish Clear Extra Thin is suitable for the protection of wood in indoor areas: wall and ceiling panelling, wooden flooring, furniture and toys. Due to its water-repelling qualities, also especially well suited to the use in wet rooms (kitchens, baths, swimming pools etc.). Osmo Wood Wax Finish Clear Extra Thin is also particularly suited to the clear treatment of hardwoods rich in extractives, such as Meranti, Wenge, Merbau etc.

ADVANTAGES

- > Also for hardwoods rich in extractives, such as Merbau, Wenge, Jatoba etc.
- > Penetrates deeply
- > Protected against abrasion, dirt and moisture
- > Spot repairs possible
- > Suitable for wood and microporous

TOOLS





COLOUR & PROTECTION FOR THE INTERIOR



POLYX®-OIL TINTS



Colour code	Can size Litre	Article Number	Unit/pack	Prices
3040 White	0.75	103 00 021	4	
	2.50	103 00 022	2	
3067 Light Grey	0.75	103 00 406	4	
	2.50	103 00 408	2	
3071 Honey	0.75	101 00 294	4	
	2.50	101 00 300	2	
3072 Amber	0.75	101 00 302	4	
	2.50	101 00 303	2	
3073 Terra	0.75	101 00 305	4	
	2.50	101 00 306	2	
3074 Graphite	0.75	101 00 311	4	
	2.50	101 00 312	2	
3075 Black	0.75	101 00 317	4	
	2.50	101 00 318	2	

Also available in 25 L canisters upon request.

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

(1st Polyx®-Oil Tints, 2nd clear Polyx®-Oil)

1. First coat on the raw, sanded wood approx. 30 ml/m².
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 24 hours (normal climatic conditions, 23 °C/ 50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m² with clear Polyx®-Oil.
6. Drying time approx. 8 – 10 hours; see point 3.

For floors with a white base coat, a top coat with Osmo Polyx®-Oil Tints White (3040) is recommended.


RECOMMENDED USE

Osmo Polyx®-Oil Tints is ideal for the protection and decorative finishing of all wooden floors, such as solid wood, plank, strip, OSB and cork flooring, as well as furniture surfaces. It is only recommended for lightly coloured wood species.

ADVANTAGES

- > Protects and colours
- > Harmonious appearance
- > Wood grain remains visible
- > Resistant to coffee, wine and cola
- > Resistant to saliva and perspiration, suitable for children's toys

TOOLS



POLYX®-OIL EFFECT SILVER/GOLD



Colour code	Can size Litre	Article Number	Unit/pack	Prices
3091 Silver	0.75	103 00 071	4	
	2.50	103 00 072	2	
3092 Gold	0.75	103 00 077	4	
	2.50	103 00 078	2	

MANUAL PROCESSING

Finished surface in 2 – 3 days, 2 – 3 coats

(1st Polyx®-Oil Effect Silver/Gold, 2nd clear Polyx®-Oil)

1. First coat on the raw, sanded wood approx. 30 ml/m². For lightly coloured wood: in order to achieve the desired effect, first apply Osmo Wood Wax Finish Black as coloured base coat and allow to dry for 24 hours.
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 24 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
5. Second coat approx. 35 ml/m² with clear Polyx®-Oil.
6. Drying time approx. 8 – 10 hours; see point 3.

RECOMMENDED USE

Osmo Polyx®-Oil Effect Silver/Gold is optimal for the decorative finishing of dark wooden flooring (Smoked Oak, Walnut etc.) or wooden flooring with a dark base coat, such as solid wood, plank, strip, as well as dark furniture.

ADVANTAGES

- > For darker woods
- > Complements modern interior design
- > With real metallic pigments
- > Resistant to saliva and perspiration, suitable for children's toys
- > Resistant to coffee, wine and cola

TOOLS



OIL STAIN



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3501 White	1.00	151 00 807	4	
	2.50	151 00 809	2	
3512 Silver Grey	1.00	151 00 812	4	
	2.50	151 00 814	2	
3514 Graphite	1.00	151 00 817	4	
	2.50	151 00 819	2	
3516 Jatoba	1.00	151 00 822	4	
	2.50	151 00 824	2	
3518 Light Grey	1.00	151 00 842	4	
	2.50	151 00 844	2	
3519 Natural	1.00	151 00 847	4	
	2.50	151 00 849	2	
3541 Havanna	1.00	151 00 837	4	
	2.50	151 00 839	2	
3543 Cognac	1.00	151 00 827	4	
	2.50	151 00 829	2	
3564 Tobacco	1.00	151 00 832	4	
	2.50	151 00 834	2	
3590 Black	1.00	151 00 802	4	
	2.50	151 00 804	2	

MANUAL PROCESSING

Finished surface in 2 – 3 days, 2 – 3 coats

(1st/2nd Oil Stain, 2nd/3rd clear Polyx®-Oil)

Transparent colour:

1. Apply very thinly to the clean and dry wood along the wood grain with Osmo Floor Brush, Microfibre Roller or Scraper.
2. Most brushstrokes can be removed within 30 minutes after applying.
3. Rub into the wood evenly with a white pad.
4. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation

Intensive colour:

5. Apply the first coat as described in points 1 – 4.
6. Apply the second coat, also very thinly, as described in point 1.
7. Rub into the wood evenly with a white pad.
8. Drying time approx. 12 hours, see point 4.
9. After step 4 or 8, carry out the final top coat with a clear Osmo Polyx®-Oil and allow to dry.

Note: Oil Stain can also be applied to smaller surfaces with a lint-free cloth.

RECOMMENDED USE

Osmo Oil Stain is ideal as a coloured base coat for all wooden floors, such as solid wood, plank, strip, OSB and cork flooring, as well as stairs and furniture surfaces.

ADVANTAGES

- > Attractive colour tones, transparent or intensive
- > Scraper, roller or brush applications
- > Simple application
- > Natural oil based

TOOLS



HARDENER FOR OIL STAIN



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
6631 Clear	0.06	151 00 528	6	

MANUAL PROCESSING

Finished surface in 1 day, 2 – 3 coats

1. Open the bottle of Hardener and pour contents into the Oil Stain can. Empty bottle completely. Stir thoroughly.
2. Processing to be carried out corresponds to that of Oil Stain.
3. Drying time approx. 4 – 5 hours (normal climatic conditions, 23 °C/ 50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation. (1st and 2nd coat.)
4. Final top coat is to be carried out with a clear Osmo Polyx®-Oil.

Note: Pot time is reduced down to 60 minutes by adding the Hardener. Please do not mix together more material than you can process with certainty within 45 minutes. If you do not use the entire can of Oil Stain, add 6 % Hardener – mix in a separate container!

RECOMMENDED USE

Osmo Hardener for Oil Stain acts as an additive for Osmo Oil Stain that accelerates the drying process.

ADVANTAGES

- > Shortened drying time
- > For high traffic areas
- > Ideal for public interiors

TOOLS



Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. brushed or structured, may lead to reduced coverage. Results may vary depending on wood species and properties (e.g. surface). Therefore a trial application is recommended.



OSMO RECOMMENDS

RECOMMENDATIONS FOR WOOD SPECIES

WOOD SPECIES	POLYX®-OIL ORIGINAL	POLYX®-OIL RAPID	WOOD WAX FINISH CLEAR EXTRA THIN	POLYX®-OIL TINTS	POLYX®-OIL EFFECT NATURAL	POLYX®-OIL EFFECT GOLD/SILVER	WOOD WAX FINISH	POLYX®-OIL PURE	COLOR-OIL	OIL STAIN
Maple	+	+	o	+	+	-	o	+	+	o
Afromosia	-	-	+	-	-	-	-	-	-	-
Acacia / Wattle	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	o	+ ¹⁾	+ ¹⁾	-	+
Bamboo	+ ¹⁾	+ ¹⁾	o	-	+ ¹⁾	-	-	+ ¹⁾	-	-
Birch	+	+	o	+	+	-	+	+	+	+
Pear	+	+	o	+	o	-	+	+	o	+
Beech	+	+	o	+	+	-	o	+	+	+
Doussie / Afzelia	-	-	+	-	-	-	-	-	-	-
Oak	+	+	o	+	+	o	+	+	+	+
Oak, smoked	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	+ ¹⁾	+ ¹⁾	+ ¹⁾	-	+
Alder	+	+	o	+	+	-	+	+	+	+
Ash	+	+	o	+	+	o	+	+	+	+
Eucalyptus	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	-	o	+ ¹⁾	o	o
Spruce / Pine	+	+	o	+	+	-	+	+	+	+
Ipe	-	-	+	-	-	-	-	-	-	-
Jarraah, Australian	+	+	o	+	-	+	+	+	o	+
Jatoba	-	-	+	-	-	-	-	-	-	-
Kambala / Iroko	-	-	+	-	-	-	-	-	-	-
Kempas	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	+ ¹⁾	o	+ ¹⁾	o	o
Pine	+	+	o	+	+	-	+	+	+	+
Cherry	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	-	-	+ ¹⁾	-	-
Cork	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	+ ¹⁾	-	+ ¹⁾	+ ¹⁾	+ ¹⁾	+
Larch	+	+	o	+	+	-	+	+	+	+
Mahogany	-	-	+	-	-	-	-	-	-	-
Merbau	+ ¹⁾	+ ¹⁾	+ ¹⁾	+ ¹⁾	-	-	o	+ ¹⁾	-	o
Walnut, American	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	-	o	+ ¹⁾	o	o
Walnut, Brazilian	-	-	+	-	-	-	-	-	-	-
Olive	+ ¹⁾	+ ¹⁾	+	+ ¹⁾	-	-	-	+ ¹⁾	-	-
OSB, sanded	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	+ ¹⁾	-	+ ¹⁾	+ ¹⁾	+ ¹⁾	+
Rosewood	-	-	+	-	-	-	-	-	-	-
Pitch Pine	+	+	o	+	+	-	+	+ ¹⁾	+ ¹⁾	+
Robinia / Locust	+	+	o	+	+	o	+	+	+	+
Teak	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	o	+ ¹⁾	+ ¹⁾	+ ¹⁾	+
Tigerwood	+ ¹⁾	+ ¹⁾	o	-	-	-	-	+ ¹⁾	-	-
Elm	+	+	o	+	-	-	+	+	+	+
Walnut	+ ¹⁾	+ ¹⁾	o	+ ¹⁾	-	-	o	+ ¹⁾	o	+
Wenge	-	-	+	-	-	-	-	-	-	-

+ Recommended
+ 1) Thin application!

o Possible
- Not recommended

SPRAY-WAX



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3009 Clear Semi-matt Anti-Slip (R9)	2.50	151 01 000	2	
	10.00	151 01 004	1	
3012 White Opaque	2.50	151 01 015	2	
	10.00	151 01 019	1	
3066 White Transparent	2.50	151 01 010	2	
	10.00	151 01 014	1	
3084 Clear Matt	2.50	151 00 900	2	
	10.00	151 00 904	1	
3085 Clear Satin	2.50	151 00 905	2	
	10.00	151 00 909	1	
3086 Clear Gloss	2.50	101 00 521	2	
	10.00	101 00 522	1	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat: apply with a cup spray gun, airless/air mix or HVLP (Can also be applied with a brush or cloth.) Application amount depends on the wood species and surface, among other factors, approx. 35 – 40 g/m².
2. Allow for good ventilation while drying.
3. Intermediate sanding: at least P220
4. Second coat: apply with a cup spray gun, airless/air mix or HVLP. Amount depends on wood species and surface, approx. 35 – 40 g/m².
5. Allow for good ventilation while drying.

Note: The desired slip resistance class R9 is only achieved by applying two coats. 3009 must not be evened out with a pad.

RECOMMENDED USE

Osmo Spray-Wax is ideal for all timber in indoor areas, for which a durable, low-maintenance and hard-wearing surface is necessary, e.g. stairs, furniture, table tops, kitchen worktops, toys, parquet, flooring etc. Especially well suited for use in wet rooms, such as baths and kitchens.

ADVANTAGES

- > Extremely tough and hard-wearing
- > For cup air spray guns, airless/air mix and HVLP
- > Easy application
- > Fast drying
- > Also suitable for wet rooms
- > Resistant to coffee, wine, cola

TOOLS



SPRAY PARAMETERS

Cup spray gun:

Spray pressure approx. 3.0 – 3.5, nozzle approx. 1.3 – 2.0 mm

Airless/Airmix:

Material pressure 80 – 120 bar

Airmix control air approx. 1 – 2.5 bar

Nozzle: 0.28 – 0.33 mm

Depending on the work method of the user/machine, the equipment and the condition of the relevant units as well as the type and shape of the work piece, all data have to be adjusted or corrected to suit individual cases.

HVLP spray gun:

Due to the multitude of different types of machinery, stating parameters is therefore not meaningful.

DRYING TIMES

Dust-dry:

after approx. 2 – 3 hours under normal climatic conditions (23 °C/50 % rel. humidity); 1 hour at 50 °C in an air convection oven.

Day to sand:

after approx. 6 – 8 hours under normal climatic conditions (23 °C/50 % rel. humidity); 2 – 3 hours at 50 °C in an air convection oven.

Dry to stack/load:

after approx. 12 – 16 hours under normal climatic conditions (23 °C/50 % rel. humidity); 6 – 8 hours at 50 °C in an air convection oven.

Always ventilate well. Lower temperatures or higher humidity can increase drying time.

INSIDER TIP



COLOURING SPRAY-WAX

Oil Stain can be used to colour Spray-Wax. Two methods are possible:

1. Apply directly to the work piece with a brush and massage in with a pad.
2. Spray-Wax can be pigmented with up to 30% Oil Stain.



COLOUR & PROTECTION FOR THE INTERIOR

WOOD WAX FINISH TRANSPARENT COLOURS



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3101 Clear	0.125	101 00 091	6	
	0.375	101 00 001	4	
	0.75	101 00 002	4	
	2.50	101 00 003	2	
3102 Lightly Steamed Beech	0.125	101 00 811	6	
	0.375	101 00 812	4	
	0.75	101 00 814	4	
	2.50	101 00 816	2	
3103 Light Oak	0.125	101 00 801	6	
	0.375	101 00 802	4	
	0.75	101 00 805	4	
	2.50	101 00 807	2	
3111 White	0.125	101 00 092	6	
	0.375	101 00 004	4	
	0.75	101 00 005	4	
	2.50	101 00 006	2	
3118 Granite Grey	0.125	101 00 330	6	
	0.375	101 00 332	4	
	0.75	101 00 336	4	
	2.50	101 00 338	2	
3119 Silk Grey	0.125	101 00 341	6	
	0.375	101 00 342	4	
	0.75	101 00 344	4	
	2.50	101 00 444	2	
3123 Pine	0.125	101 00 093	6	
	0.375	101 00 013	4	
	0.75	101 00 014	4	
	2.50	101 00 015	2	
3136 Birch	0.125	101 00 094	6	
	0.375	101 00 075	4	
	0.75	101 00 076	4	
	2.50	101 00 077	2	

Also available in 25 L canisters upon request.

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3137 Cherry	0.125	101 00 095	6	
	0.375	101 00 078	4	
	0.75	101 00 079	4	
	2.50	101 00 080	2	
3138 Mahogany	0.125	101 00 096	6	
	0.375	101 00 084	4	
	0.75	101 00 085	4	
	2.50	101 00 086	2	
3143 Cognac	0.125	101 00 270	6	
	0.375	101 00 271	4	
	0.75	101 00 272	4	
	2.50	101 00 273	2	
3161 Ebony	0.125	101 00 098	6	
	0.375	101 00 022	4	
	0.75	101 00 023	4	
	2.50	101 00 024	2	
3164 Oak	0.125	101 00 099	6	
	0.375	101 00 031	4	
	0.75	101 00 032	4	
	2.50	101 00 033	2	
3166 Walnut	0.125	101 00 100	6	
	0.375	101 00 081	4	
	0.75	101 00 082	4	
	2.50	101 00 083	2	
3168 Oak antique	0.125	101 00 263	6	
	0.375	101 00 261	4	
	0.75	101 00 262	4	
	2.50	101 00 291	2	

MANUAL PROCESSING

Finished surface in 1 – 2 days, 1 – 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.

For a lightly stained effect: within 20 minutes after the application, wipe with a cloth or with a white pad along the wood grain.

For an intensive colour: if an intensive colour is desired, repeat the process (apply maximum 2 coats). This only applies to intensive colour tones.

As a coloured base coat for flooring: drying time approx. 24 hours (instead of 12 hours; see point 3). Second coat approx. 35 ml/m² with clear Polyx®-Oil. Drying time approx. 8 – 10 hours; see point 3.

For floors with a white base coat, a top coat with Osmo Polyx®-Oil Tints White (3040) is recommended.


RECOMMENDED USE

Osmo Wood Wax Finish is suitable for the protection and decorative finishing of wood in indoor areas: wall panelling, mouldings and beams as well as doors. It is also suitable for edge-glued panels, chipboard and MDF. Ideal as a coloured base coat for wooden flooring and for recoating darkened wood surfaces. Highly recommended for furniture and children's toys.

ADVANTAGES

- > Easy to use
- > Suitable for wood and microporous
- > Wear-resistant and dirt-repellent, resistant to household chemicals
- > Resistant to saliva and perspiration, suitable for children's toys

TOOLS



WOOD WAX FINISH INTENSIVE COLOURS



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3104 Red approx. RAL 3000 Flame Red	0.125	101 00 828	6	
	0.375	101 00 830	4	
3105 Yellow approx. RAL 1021 Colza Yellow	0.125	101 00 822	6	
	0.375	101 00 824	4	
3125 Blue approx. RAL 5010 Gentian Blue	0.125	101 00 834	6	
	0.375	101 00 836	4	
3131 Green approx. RAL 6029 Mint Green	0.125	101 00 840	6	
	0.375	101 00 842	4	
3132 Grey Beige approx. RAL 1019 Grey Beige	0.125	101 00 846	6	
	0.375	101 00 848	4	
	0.750	101 00 850	4	
3169 Black	0.125	101 00 451	6	
	0.375	101 00 452	4	
	0.75	101 00 453	4	
	2.50	101 00 454	2	

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3172 Silk	0.125	101 00 375	6	
	0.375	101 00 390	4	
	0.75	101 00 405	4	
	2.50	101 00 420	2	
3181 Pebble	0.125	101 00 370	6	
	0.375	101 00 385	4	
	0.75	101 00 400	4	
	2.50	101 00 415	2	
3186 White matt	0.125	101 00 379	6	
	0.375	101 00 394	4	
	0.75	101 00 409	4	
	2.50	101 00 424	2	
3188 Snow	0.125	101 00 456	6	
	0.375	101 00 457	4	
	0.75	101 00 458	4	
	2.50	101 00 459	2	

TOPOIL



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3028 Clear Satin	0.5	103 00 049	6	
3058 Clear Matt	0.5	139 00 050	6	
3061 Acacia	0.5	139 00 072	6	
3068 Natural	0.5	103 00 061	6	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on the raw, sanded wood approx. 35 ml/m².
2. Best to apply with a lint-free cloth. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 8 – 10 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 35 ml/m².
5. Drying time approx. 8 – 10 hours; see point 3.


RECOMMENDED USE

Osmo TopOil is ideal for the protection of furniture surfaces and work surfaces made of solid wood or edge-glued panels (e.g. kitchen worktops, desks, shelving etc.) in indoor areas. Also suitable for cork and OSB.

ADVANTAGES

- > Food safe
- > Resistant to household chemicals and stains
- > Water-repellent and wear-resistant
- > Resistant to saliva and perspiration, suitable for children's toys
- > Safe for humans, animals and plants

TOOLS



Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. brushed or structured, may lead to reduced coverage. Results may vary depending on wood species and properties (e.g. surface). Therefore a trial application is recommended.



COLOUR & PROTECTION FOR THE INTERIOR

WOOD PROTECTOR



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
4006 Clear	0.75	123 00 001	4	
	2.50	123 00 002	2	

MANUAL PROCESSING

Finished surface in 1 day, 1 coat (no stand-alone finish)

1. Apply to raw wood approx 120 ml/m².
2. Drying time approx. 24 hours when applied with a brush or approx. 36 hours when dipped (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
3. Final top coat must be carried out within one week.

RECOMMENDED USE

Osmo Wood Protector is suitable for all wood in indoor areas, e.g. wooden flooring made of wood species susceptible to blue stain (e.g. Pine), window frames and wood in baths, and for wood in outdoor areas, for which an absolutely ecological, biocide-free impregnation is desired, e.g. playground equipment and sandboxes.

ADVANTAGES

- > For interior and exterior use
- > Highly water-repellent and free of organic biocides
- > Easy to use
- > Suitable for wood and microporous
- > Resistant to saliva and perspiration, suitable for children's toys

TOOLS



MAINTENANCE OIL



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
3079 Clear Matt	1.00	151 01 040	4	
	2.50	151 01 041	2	
	10.00	151 01 042	1	
3081 Clear Satin	1.00	151 01 045	4	
	2.50	151 01 046	2	
	10.00	151 01 047	1	
3098 Clear Semi-matt Anti-Slip (R9)	1.00	151 01 060	4	
	2.50	151 01 061	2	
	10.00	151 01 062	1	
3440 White Transparent	1.00	151 01 043	4	
	2.50	151 01 044	2	
	10.00	103 00 420	1	

MANUAL PROCESSING

Finished surface in 1 day, 1 coat

1. Apply with a Double Blade Scraper or Osmo Microfibre Roller thinly on the surface.
2. Rub into the surface with a single disc machine, e.g. Osmo FloorX-center, and white pad (except for 3098). Remove excess.
3. Allow for good ventilation while drying.

Maintenance Oil can also be applied to smaller areas with a lint-free cloth.

RECOMMENDED USE

Osmo Maintenance Oil is ideal for the maintenance of all wooden flooring treated with Polyx®-Oil, such as solid wood, plank, parquet, strip, OSB and cork flooring, as well as stairs and furniture surfaces. Highly recommended for public interiors (e.g. restaurants, museums and other high traffic floors).

ADVANTAGES

- > Ideal for public interiors
- > Regular maintenance without sanding
- > Fast drying
- > Geared towards the Osmo woodcare range

TOOLS



INTERIOR-WAX



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
7393 White Transparent	0.75	131 00 226	4	
	2.50	131 00 227	2	
7394 White Opaque	0.75	131 00 230	4	
	2.50	131 00 231	2	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on the raw, sanded wood approx. 62 ml/m².
2. Drying time approx. 3 – 4 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
3. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
4. Second coat approx. 62 ml/m².
5. Drying time approx. 3 – 4 hours; see point 2.

RECOMMENDED USE

Osmo Interior-Wax is suitable for the protection and decorative finishing of wood in indoor areas: wall and ceiling panelling, moulding and beams as well as furniture, doors and children's toys. It is also suitable for recoating and repairing wood factory finished with Osmo Interior-Wax White Transparent (7393) or White Opaque (7394) and for recoating old wooden ceiling panelling.

ADVANTAGES

- > No primer or intermediate sanding needed
- > Easy to apply
- > Easy to work overhead
- > Odourless and encourages healthy living

TOOLS



UVIWAX® UV-PROTECTION



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
7200 Clear Satin	0.75	132 00 051	4	
	2.50	132 00 050	2	
7266 White Spruce Transparent	0.75	132 00 135	4	
	2.50	132 00 136	2	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on the raw, sanded wood approx. 62 ml/m².
2. Drying time approx. 3 – 4 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
3. If desired, the dried finish can be smoothed with fine grain sandpaper (P400) or with a Scotchpad before applying the second coat.
4. Second coat approx. 62 ml/m².
5. Drying time approx. 3 – 4 hours; see point 2.

RECOMMENDED USE

Osmo Uviwax® UV-Protection is suitable as a single product application for wall and ceiling panelling as well as cabinets and doors in indoor areas. It is also suitable for recoating sawn edges and screw holes, additional mouldings, boards etc. that were factory finished with Osmo Uviwax® UV-Protection. Suitable for all non-resinous wood species.

ADVANTAGES

- > UV protection for indoor areas
- > Wood retains its natural, light colour tone over many years, no yellowing
- > Resistant to saliva and perspiration, suitable for children's toys

TOOLS





COLOUR & PROTECTION FOR THE INTERIOR



MAINTENANCE KIT FOR FLOORS

Product	Article Number	Unit/pack	Prices
Maintenance Kit for Floors	129 00 007	1	

SET CONTENTS

- > Wash and Care Cleaning Concentrate 1 l
 - > Liquid Wax Cleaner Spray 0.4 l
 - > Cloths 3 pcs., maintenance instructions
- Please follow the work instructions for each product.

RECOMMENDED USE

Osmo Floor Maintenance Kit is ideal for the cleaning and maintenance of wood flooring treated with Polyx®-Oil.

ADVANTAGES

- > One kit for all eventualities – fully equipped for cleaning and floorcare.


TOOLS



LIQUID WAX CLEANER



Colour code	Can size Litre	Article Number	Unit/pack	Prices
3029 Clear	0.50	139 00 031	6	
	1.00	139 00 002	6	
	10.00	139 00 013	1	
	25.00	139 00 003	1	
3087 White	1.00	139 00 055	6	
	0.40	139 00 041	6	
3029 Clear, Spray	0.40	139 00 041	6	



MANUAL PROCESSING

1. Remove debris with Dust-Mop or a vacuum cleaner, or possibly pre-clean with Wash and Care (see below).
2. Apply approx. 2 teaspoons per m² to the floor and spread over the area by using an Active Fibre Cloth or a single disc machine (white pad). Apply extremely thinly.
3. Drying time: approx. 30 – 40 minutes. Allow for good ventilation.
4. In a routine maintenance schedule, it is absolutely necessary to also restore the necessary oil content of flooring treated with Polyx®-Oil. Recoat cleaned surfaces of areas with particularly high traffic with Osmo Maintenance Oil or Polyx®-Oil Original clear.

Manual processing Liquid Wax Cleaner Spray

1. Shake before use.
2. For maintenance, hold spray can upright and apply thinly from a distance of approx. 30 cm onto the cleaned, dry area and rub evenly with a cloth or a Scotchpad.
3. For stain removal, apply directly onto the contaminated area – for especially tough stains, use a cloth or Scotchpad.
4. Wipe away loosened deposits.

RECOMMENDED USE

Osmo Liquid Wax Cleaner / Spray is ideal for the removal of tough deposits, such as grease or shoe polish, and best suited for refreshing all surfaces treated with Osmo Polyx®-Oil.


ADVANTAGES

- > For flooring and furniture
- > Cleans and regenerates at the same time
- > Provides the wood with natural hard waxes, without forming a film.
- > Optimal in combination with Osmo Cleaning Kit for Floors.

TOOLS



INTENSIVE CLEANER



Colour code	Can size Litres	Article Number	Unit/ pack	Prices
8019 Clear	1.00	151 01 050	6	
	5.00	151 01 055	1	

MANUAL PROCESSING

1. Dilute concentrate 1 : 10 to 1 : 20 with water.
2. Apply to contaminated surfaces, loosen deposits and wipe up with clear water. For machine processing on flooring, we recommend using a single disc machine (e.g. Osmo FloorXcenter) with brush ring, red or green pad.
3. Wipe up with Osmo Micro-Mop Plush or a lint-free cotton cloth.
4. When completely dried, recoat the cleaned surface with Maintenance Oil or a Polyx®-Oil.

Never apply undiluted. By all means, perform a trial application on the sub-surface. Whether it is necessary to recoat the surface with Maintenance Oil or Polyx®-Oil depends on the condition of surface after cleaning.

RECOMMENDED USE

Osmo Intensive Cleaner is ideal as an alternative to sanding all wooden surfaces treated with oils and waxes, e.g. flooring or furniture, and also suitable for cleaning plastics, stainless steel and other water-proof surfaces.

ADVANTAGES

- > Simple application
- > Ideal for public areas
- > Thorough cleaning instead of sanding
- > For interior and exterior use

TOOLS



WASH AND CARE



Colour code	Can size Litres	Article Number	Unit/ pack	Prices
8016 Clear	1.00	139 00 030	6	
	5.00	139 00 038	1	
	10.00	139 00 062	1	

MANUAL PROCESSING

1. Remove debris with a dust mop or a vacuum cleaner
2. Concentrate: 1 capful of Wash and Care to 2 litres of water. For machine processing (e.g. with FloorXcenter) or a higher level of contamination, the concentration can be increased to a mixing ratio of 1:1.
3. Clean with a slightly damp mop and dry immediately.

RECOMMENDED USE

Osmo Wash and Care is especially suitable for the cleaning and care of oiled and waxed wooden flooring. It is also recommended for furniture, doors, wall and ceiling panelling.

ADVANTAGES

- > Highly effective cleaning and care concentrate with natural ingredients
- > For regular cleaning and care
- > Highly recommended for flooring treated with Polyx®-Oil.
- > Moisturizing, does not dry flooring out

TOOLS



SPRAY-CLEANER



Colour code	Can size Litres	Article Number	Unit/ pack	Prices
8026 Clear	0.50	129 00 084	6	

MANUAL PROCESSING

1. Remove debris.
2. Spray onto surface.
3. Clean the surface subsequently with a lint-free cotton cloth and rub dry.

RECOMMENDED USE

Osmo Spray Cleaner is especially suitable for the cleaning and maintenance of oiled and waxed wood surfaces in indoor areas. It is particularly recommended for surfaces treated with Osmo TopOil.

ADVANTAGES

- > Highly effective cleaning
- > Cleans without damaging the surface
- > Preserves and restores the surface
- > Easy application
- > Suitable for household and commercial use
- > Suitable for all wood species

TOOLS





The best for wood facing wind and weather is a finish that was developed only for wood.

EXTERIOR



COLOUR & PROTECTION FOR THE EXTERIOR

SCREENS



DECKING-OILS
(Page 32)



UV-PROTECTION-OIL/
UV-PROTECTION-OIL
EXTRA
(Page 35)



UV-PROTECTION-OIL
TINTS
(Page 35)



NATURAL OIL
WOODSTAIN
(Page 36)



NATURAL OIL
WOODSTAIN
EFFECT
(Page 37)



ONE COAT ONLY
HS^{PLUS}
(Page 37)



COUNTRY COLOUR
(Page 38)

DECKING



DECKING-OILS
(Page 32)



ANTI-SLIP
DECKING-OIL
(Page 33)



END GRAIN
SEALING WAX
(Page 33)



NATURAL OIL
WOODSTAIN
(Page 30)



DECKING CLEANER
(Page 40)



POLYMER
COMPOSITE
CLEANER
(Page 40)



WOOD REVIVER
POWER-GEL
(Page 41)



GARD CLEAN
(Page 41)

GARDEN FURNITURE



DECKING-OILS
(Page 32)



ONE COAT ONLY
HS^{PLUS}
(Page 37)



COUNTRY COLOUR
(Page 38)



WOOD REVIVER
POWER-GEL
(Page 41)



SPRAY CLEANER
(Page 37)



TEAK-OIL SPRAY
(Page 34)



GARDEN FURNITURE
MAINTENANCE KIT
(Page 34)

TIMBER CLADDING / SUMMER HOUSES



NATURAL OIL
WOODSTAIN
(Page 30)



NATURAL OIL
WOODSTAIN
EFFECT
(Page 37)



COUNTRY COLOUR
(Page 38)



ONE COAT ONLY
HS^{PLUS}
(Page 37)



UV-PROTECTION-OIL /
UV-PROTECTION-OIL
EXTRA
(Page 35)



WR BASE COAT
(Page 40)



OPAQUE GLOSS
WOOD STAIN
(Page 39)



END GRAIN
SEALING WAX
(Page 33)



UV-PROTECTION-OIL
TINTS
(Page 35)



DECKING-OILS

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
004 Douglas Fir Oil, Natural shade	0.75	115 00 018	4	
	2.50	115 00 019	2	
006 Bangkirai-Oil, Natural shade	0.75	115 00 012	4	
	2.50	115 00 013	2	
007 Teak-Oil, Clear	0.375	115 00 004	4	
	0.75	115 00 002	4	
	2.50	115 00 005	2	
009 Larch-Oil, Natural shade	0.75	115 00 020	4	
	2.50	115 00 021	2	
010 Thermowood-Oil, Natural shade	0.75	115 00 043	4	
	2.50	115 00 045	2	
013 Garapa-Oil, Natural shade	0.75	115 00 081	4	
	2.50	115 00 082	2	
014 Massaranduba-Oil, Natural shade	0.75	115 00 084	4	
	2.50	115 00 085	2	
016 Bangkirai-Oil, Dark	0.75	115 00 063	4	
	2.50	115 00 062	2	
019 Decking-Oil Grey	0.75	115 00 141	4	
	2.50	115 00 142	2	
021 Decking-Oil Bog Oak	0.75	115 00 154	4	
	2.50	115 00 156	2	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat thinly applied on raw (weathered) wood approx. 35 ml/m².
Note: Resinous woods and woods rich in extractives first need to weather off.
2. Mistakes in the wet coating can be corrected up to 30 minutes after the first application.
3. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 35 ml/m². (For renovation works, normally one coat on a cleaned surface is sufficient.)
5. Drying time approx. 12 hours; see point 3.


RECOMMENDED USE

Osmo Decking-Oils protect and maintain timber decking, garden furniture and privacy screens made of numerous coniferous and fine woods, e.g. pressure impregnated Pine, Douglas Fir, Cedar, Oak or Bangkirai – also suitable as a transparent colour treatment of Teak, Eucalyptus and other fine woods as well as thermo treated wood.

ADVANTAGES

- > Decking-Oils smoothen the wood surface and make it water and dirt-repellent
- > Easy to refresh, no sanding or primer necessary
- > Osmo Teak-Oil is clear and therefore it does not protect against UV radiation (greying).

TOOLS



INSIDER TIP



DECKING AND FLOORING CLEANING MACHINE

INTENSIVE CLEANING AND DEGREYING

Wood turns grey. Therefore it makes sense to clean and restore it every now and then, so it lasts even longer and looks flawless again. At an authorized dealer, the Osmo Decking and Flooring Cleaning Machine can be rented for exactly this purpose. In spring, timber decking in outdoor areas can be brought back into tip-top condition with this machine, and in autumn, wooden flooring in indoor areas can be deeply cleaned effortlessly.

After the treatment, durable protection of the wood can be achieved with an Osmo wood finish so that the now visible, natural, original wood colour tone is preserved. For this we recommend either Osmo Decking-Oils or Osmo Natural Oil Woodstain. As the final top coat, we suggest our Anti-Slip Decking Oil.

ANTI-SLIP DECKING OIL



PROTECTION
Product contains active ingredients for the preventative protection against algae and fungal decay



Colour code	Can size Litres	Article Number	Unit/ pack	Prices
430 Clear *	0.75	115 00 074	4	
	2.50	115 00 073	2	
	25.00	115 00 072	1	

MANUAL PROCESSING

Finished surfaces in 2 days, 2 coats (base coat required)

(1st Decking-Oil, 2nd Anti-Slip Decking Oil)

1. First pigmented coat with an Osmo Decking-Oil on raw wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 24 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat (top coat) approx. 35 ml/m² with Anti-Slip Decking Oil. (For renovation works, normally one coat on a cleaned surface is sufficient.)
5. Drying time approx. 12 hours; see point 3.

*Not suitable for 007 Teak-Oil

RECOMMENDED USE

Osmo Anti-Slip Decking Oil is especially suitable for all timber decking and stairs in outdoor areas made of e.g. Bangkirai, Massaranduba, Garapa, Larch, Douglas Fir or Pine. Suitable for ribbed, grooved and particularly for smooth decking surfaces.

ADVANTAGES

- > Slip-resistant effect
- > Extends the durability of pigmented oil-based finishes through additional weathering protection
- > The surface is water-repellent as well as weather and UV resistant
- > With film protection

TOOLS



END GRAIN SEALING WAX



Colour code	Can size Litres	Article Number	Unit/ pack	Prices
5735 Clear	0.375	103 00 151	4	

MANUAL PROCESSING

1. Apply first coat generously, wet on wet, on raw end grain approx. 150 ml/m².
2. Drying time approx. 3 – 4 hours (normal climatic conditions, 23 °C/ 50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
3. Second coat approx. 50 ml/m².
4. Drying time approx. 12 hours; see point 2.

RECOMMENDED USE

Osmo End Grain Sealing Wax is especially suitable for end grains of decking, cladding or roof soffits made of hard and softwood such as Bangkirai, Teak, Massaranduba, Garapa, Cumaru as well as Pine, Spruce, Douglas Fir, Larch, Cedar, Thermowood, etc.

ADVANTAGES

- > Protects end grains of decking against cracks
- > Minimizes swelling and shrinkage
- > Prevents wood extractives from bleeding
- > Free of water and silicone, easy to apply
- > High weather resistance
- > For approx. 250 boards treated on both sides of the face edges

TOOLS



INSIDER TIP



FILM PROTECTION AGAINST MOSS AND ALGAE

So micro-organisms, such as mould, algae or moss, cannot adhere to the coating and cause unsightly discolourations, biocidal active ingredients for a superficial film protection can be added – not to be confused with an impregnation, which protects wood against pest attacks from the inside. Osmo carefully adjusts the amount of active biocidal ingredients so that a harmful effect for people can be largely eliminated, when wood finishes are used properly. Yet, many consumers prefer wood finishes without film protection, if it is not necessary. Therefore Osmo also offers wood finishes without any biocides.

Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. grooved or ribbed, may lead to reduced coverage. Depending on the wood species and its natural characteristics (e.g. surface), specific results may vary. Therefore, a trial application is always required.



COLOUR & PROTECTION FOR THE EXTERIOR



TEAK-OIL SPRAY

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
008 Clear	0.40	103 00 060	6	



MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. Spraying distance approx. 25 cm. Afterwards rub in with a brush.
2. During the application, cover and protect surrounding areas and parts which are not to be coated. Wipe away excess with a cloth.
3. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation while drying and apply a second coat.
4. For renovation works, one coat is normally sufficient.
5. Clean spray nozzle after use.

ADVANTAGES

- > Applied easily to difficult to reach areas on furniture
- > Clear, water and dirt-repellent oil
- > Enhances the natural wood structure
- > Penetrates deeply into the wood structure
- > Moisture-regulating and prevents swelling and shrinkage

RECOMMENDED USE

Osmo Teak-Oil Spray protects, maintains and improves the appearance of garden furniture made of Teak and other hardwoods – in covered outdoor areas. It is also well suited for the clear treatment of garden furniture and other similarly used surfaces.

TOOLS



GARDEN FURNITURE MAINTENANCE KIT



Product	Article Number	Unit/ pack	Prices
Garden Furniture Maintenance Kit	139 00 125	1	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. Remove debris with a hard bristle brush
2. Even out damages in wood with buffing fleece.
3. Dampen surface with water
4. Apply Wood Reviver Power Gel and rub into wood with stiff brush.
5. Rinse with clear water and allow to dry completely (min. 24 hours).
6. First coat Teak-Oil Spray on raw wood approx. 50 – 100 ml/m² (depending on overspray and subsurface).
7. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
8. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
9. Second coat approx. 50 – 100 ml/m².
10. Drying time approx. 12 hours; see point 8.

SET CONTENTS

- > Wood Reviver Power Gel 0.5 l - restores and cleans greyed wood
- > Teak-Oil Spray 0.4 l – protects, maintains and improves the appearance of garden furniture and decking (water and dirt-repellent oil)
- > Buffing fleece
- > Stiff brush
- > Care instructions

RECOMMENDED USE

Osmo Garden Furniture Maintenance Kit is suitable for the maintenance of wood in outdoor areas. Highly recommended for garden and decking furniture.

ADVANTAGES

- > Complete set for the restoration of greyed garden furniture
- > Expert cleaning through buffing fleece and stiff brush
- > Wood Reviver Power Gel restores and cleans
- > Enhances the natural wood structure
- > Teak-Oil Spray protects, maintains and penetrates deeply into the wood structure
- > Moisture-regulating and prevents swelling and shrinkage.

TOOLS



UV-PROTECTION-OIL AND UV-PROTECTION-OIL EXTRA



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
410 Clear, satin, without film protection	0.75	116 00 021	4	
	2.50	116 00 022	2	
420 Clear, satin, with film protection	0.75	116 00 026	4	
	2.50	116 00 027	2	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on raw wood approx. 55 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 10 - 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 55 ml/m².
5. Drying time approx. 12 hours; see point 3.

RECOMMENDED USE

Osmo UV-Protection-Oil is ideal for all vertical wood surfaces in outdoor areas: doors, windows, window shutters (dimensionally stable elements), carports, timber cladding, balconies, fences, pergolas, and summer houses (dimensionally unstable elements).

ADVANTAGES

- > With or without film protection (410 without film protection; 420 with film protection)
- > As a top coat on already colour treated wood, it extends the intervals between renovation works significantly
- > As a single product application, it delays the greying process by means of a UV protection factor 12 in comparison with untreated wood

TOOLS



UV-PROTECTION OIL TINTS



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
424 Spruce, satin, with film protection	0.750	116 00 049	4	
	2.500	116 00 057	2	
425 Oak, satin, with film protection	0.75	116 00 033	4	
	2.50	116 00 034	2	
426 Larch, satin, with film protection	0.750	116 00 062	4	
	2.500	116 00 063	2	
427 Douglas Fir, satin, with film protection	0.750	116 00 068	4	
	2.500	116 00 069	2	
428 Red Cedar, satin, with film protection	0.75	116 00 041	4	
	2.50	116 00 042	2	
429 Natural, satin, with film protection	0.75	116 00 051	4	
	2.50	116 00 052	2	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on raw wood approx. 55 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 10 - 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 55 ml/m².
5. Drying time approx. 12 hours; see point 3.

RECOMMENDED USE

Osmo UV-Protection-Oil Tints is ideal for all vertical wood surfaces in outdoor areas: doors, windows, window shutters (dimensionally stable elements), carports, timber cladding, balconies, fences, pergolas, and summer houses (dimensionally unstable elements). Also suitable for bamboo poles (e.g. in screens).

ADVANTAGES

- > With film protection
- > As a top coat on already colour treated wood, it extends the intervals between renovation works significantly
- > As a single product application, it delays the greying process by means of a UV protection factor 12 in comparison with untreated wood

TOOLS





COLOUR & PROTECTION FOR THE EXTERIOR



NATURAL OIL WOODSTAIN

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
700 Pine	0.75	121 00 001	4	
	2.50	121 00 002	2	
701 Clear, matt	0.75	121 00 075	4	
	2.50	121 00 085	2	
702 Larch	0.75	121 00 055	4	
	2.50	121 00 056	2	
703 Mahogany	0.75	121 00 004	4	
	2.50	121 00 005	2	
706 Oak	0.75	121 00 007	4	
	2.50	121 00 008	2	
707 Walnut	0.75	121 00 010	4	
	2.50	121 00 011	2	
708 Teak	0.75	121 00 013	4	
	2.50	121 00 014	2	
710 Stone pine	0.75	121 00 097	4	
	2.50	121 00 096	2	
712 Ebony	0.75	121 00 017	4	
	2.50	121 00 018	2	
727 Rosewood	0.75	121 00 035	4	
	2.50	121 00 036	2	
728 Red Cedar	0.75	121 00 038	4	
	2.50	121 00 039	2	
729 Fir Green	0.75	121 00 084	4	
	2.50	121 00 086	2	
731 Oregon Pine	0.75	121 00 254	4	
	2.50	121 00 256	2	
732 Light Oak	0.75	121 00 264	4	
	2.50	121 00 266	2	

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
900 White	0.75	121 00 023	4	
	2.50	121 00 024	2	
903 Basalt Grey	0.75	121 00 026	4	
	2.50	121 00 027	2	
905 Patina	0.75	121 00 150	4	
	2.50	121 00 151	2	
906 Pearl Grey	0.75	121 00 274	4	
	2.50	121 00 276	2	
907 Quartz Grey	0.75	121 00 284	4	
	2.50	121 00 286	2	

Also available in 25 L canisters upon request.

Tip: Also available in 186 RAL and 1950 NSC colour tones upon request.

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on raw wood approx 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 4 - 6 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 35 ml/m². (For renovation works, normally one coat on a cleaned surface is sufficient.)
5. Drying time approx. 12 hours; see point 3.

* 701 Clear matt without UV protection

RECOMMENDED USE

Osmo Natural Oil Woodstain is ideal for all wood in outdoor areas: doors, windows and window shutters (dimensionally stable elements), carports, timber cladding, balconies, fences, pergolas, garden furniture and summer houses (dimensionally unstable elements).

ADVANTAGES

- > Base and top coat in one finish
- > Water-repellent, extremely weather and UV-resistant
- > Microporous and breathable surface
- > Coating is protected against mould, algae and fungal attack

TOOLS



INSIDER TIP



BEAUTIFUL MATT SURFACES

If the substrate does not absorb the wood finish evenly, the colour will be uneven. For an improved, uniform and matted surface, we recommend refinishing the surface with Natural Oil Woodstain 701 Clear. Thereby glossy spots are matted and an even, elegant appearance is created.

NATURAL OIL WOODSTAIN EFFECT



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
1140 Agate-Silver	0.75	121 00 230	4	
	2.50	121 00 231	2	
1142 Graphite-Silver	0.75	121 00 242	4	
	2.50	121 00 243	2	
1143 Onyx-Silver	0.75	121 00 248	4	
	2.50	121 00 249	2	

MANUAL PROCESSING

Finished surface in 1 day, 2 coats

1. First coat on raw wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 4 - 6 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 35 ml/m². (For renovation works, normally one coat on a cleaned surface is sufficient.)
5. Drying time approx. 12 hours; see point 3.

RECOMMENDED USE

Osmo Natural Oil Woodstain is ideal for all wood in outdoor areas: doors, windows and window shutters (dimensionally stable elements), carports, timber cladding, balconies, fences, pergolas, garden furniture and summer houses (dimensionally unstable elements).

ADVANTAGES

- > With real metallic particles
- > Base and top coat in one finish
- > Water-repellent, extremely weather and UV-resistant
- > Microporous and breathable surface
- > Coating is protected against mould, algae and fungal attack

TOOLS



ONE COAT ONLY HS^{PLUS}



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
9211 White Spruce	0.75	111 01 060	4	
	2.50	111 01 065	2	
9212 Silver Poplar	0.75	111 01 450	4	
	2.50	111 01 455	2	
9221 Pine	0.75	111 01 480	4	
	2.50	111 01 485	2	
9232 Mahogany	0.75	111 01 240	4	
	2.50	111 01 245	2	
9234 Scand. Red	0.75	111 01 330	4	
	2.50	111 01 335	2	
9235 Red Cedar	0.75	111 01 030	4	
	2.50	111 01 035	2	
9236 Larch	0.75	111 01 210	4	
	2.50	111 01 215	2	
9241 Oak	0.75	111 01 390	4	
	2.50	111 01 395	2	
9242 Fir Green	0.75	111 01 150	4	
	2.50	111 01 155	2	

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
9261 Walnut	0.75	111 01 360	4	
	2.50	111 01 365	2	
9262 Teak	0.75	111 01 420	4	
	2.50	111 01 425	2	
9264 Rosewood	0.75	111 01 120	4	
	2.50	111 01 125	2	
9271 Ebony	0.75	111 01 270	4	
	2.50	111 01 275	2	

MANUAL PROCESSING

Finished surface in 1 day, 1 coat

1. First coat on raw wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.

Also available in 25 L canisters upon request.

RECOMMENDED USE

Osmo One Coat Only HS^{PLUS} is ideal for the protection of all wood in outdoor areas: carports, timber cladding, balconies, fences, pergolas, garden furniture and summer houses. Well suited to renewing old microporous stains.

ADVANTAGES

- > Doubled coverage through a high oil content – saves time and money
- > Smoothens the wood surface, does not crack, peel, flake or blister
- > Durable, weather and UV-resistant, water-repellent and regulates moisture
- > Does not allow wood to swell

TOOLS



Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. brushed or structured, may lead to reduced coverage. Results may vary depending on wood species and properties (e.g. surface). Therefore a trial application is recommended.



COLOUR & PROTECTION FOR THE EXTERIOR



COUNTRY COLOUR

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
2101 White	0.75	114 00 027	4	
	2.50	114 00 028	2	
2203 Light Ochre	0.75	114 00 017	4	
	2.50	114 00 018	2	
2204 Ivory	0.75	114 00 036	4	
	2.50	114 00 037	2	
2205 Sunflower Yellow	0.75	114 00 059	4	
	2.50	114 00 058	2	
2308 Nordic Red	0.75	114 00 030	4	
	2.50	114 00 031	2	
2310 Cedar/Redwood	0.75	114 00 068	4	
	2.50	114 00 069	2	
2311 Signal Red	0.75	114 00 126	4	
	2.50	114 00 128	2	
2404 Fir Green	0.75	114 00 003	4	
	2.50	114 00 004	2	
2501 Labrador Blue	0.75	114 00 005	4	
	2.50	114 00 006	2	
2506 Royal Blue	0.75	114 00 072	4	
	2.50	114 00 073	2	
2507 Dove Blue	0.75	114 00 115	4	
	2.50	114 00 111	2	
2606 Medium Brown	0.75	114 00 011	4	
	2.50	114 00 012	2	
2607 Dark Brown	0.75	114 00 009	4	
	2.50	114 00 010	2	
2703 Charcoal	0.75	114 00 013	4	
	2.50	114 00 014	2	

Colour code	Can size Litre	Article Number	Unit/ pack	Prices
2704 Dusk Grey	0.75	114 00 015	4	
	2.50	114 00 016	2	
2708 Pebble Grey	0.75	114 00 122	4	
	2.50	114 00 123	2	
2716 Anthracite Grey	0.75	110 00 156	4	
	2.50	110 00 158	2	
2735 Light Grey	0.75	114 00 143	4	
	2.50	114 00 144	2	
2742 Traffic Grey	0.75	114 00 149	4	
	2.50	114 00 151	2	

Also available in 25 L canisters upon request.

Tip: Also available in 186 RAL and 1950 NSC colour tones upon request.

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on raw wood approx. 35 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 10 - 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 35 ml/m². (For renovation works, normally one coat on a cleaned surface is sufficient.)
5. Drying time approx. 12 hours; see point 3.

RECOMMENDED USE

Osmo Country Colour is best suited for all wood in outdoor areas where an especially durable coating is required: timber cladding, balconies, windows and window shutters, fences, pergolas, wooden shingles, garden furniture and summer houses, carports etc. Ideal for renewing old microporous finishes and weathered wooden surfaces.

ADVANTAGES

- > The wood structure remains visible
- > All colour tones can be mixed with each other
- > Country Colour is weather-resistant and robust against small damages
- > Resistant to saliva and perspiration, suitable for children's toys

TOOLS



OPAQUE GLOSS WOOD STAIN



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
2104 White	0.75	112 00 002	4	
	2.50	112 00 003	2	

MANUAL PROCESSING

Finished surface in 2 days, 2 coats

1. First coat on raw wood approx. 45 ml/m².
2. Mistakes in the wet coating can be corrected up to 15 minutes after the first application.
3. Drying time approx. 10 – 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Allow for good ventilation.
4. Second coat approx. 45 ml/m².
5. Drying time approx. 12 hours; see point 3.

RECOMMENDED USE

Osmo Opaque Gloss Wood Stain is especially suitable for all wood in indoor and outdoor areas. Ideal for coating or recoating dimensionally stable elements, such as windows, window shutters and doors, as well as dimensionally unstable elements, such as roof soffits, fences, screens, pergolas, posts, garden pavilions, greenhouses and garden furniture.

ADVANTAGES

- > Recommended for windows and doors
- > Extremely water-repellent, weather and UV-resistant
- > Easy to spread and excellent coverage

TOOLS



INSIDER TIP



BIOCIDIAL INGREDIENTS

Osmo Country Colour is also available upon request with biocidal ingredients for a protective film against algae and fungal attack.

EVEN MORE COLOURS

Your customers would like a colour tone that cannot be found in our product range?

Our microporous, oil-based Country Colour and Natural Oil Woodstain finishes are available in almost all of the colour tones from the RAL and NCS colour spectrums. Country Colour and Natural Oil Woodstain finishes in custom colour tones are mixed per order. The minimum order amount per colour tone is 1 x 2.5 litres.

Call us to find out more.





COLOUR & PROTECTION FOR THE EXTERIOR

WR BASE COAT



PROTECTION
Preventive protection
for wood against decay,
blue stain and insect
attack.

5-6m²/1l

1 COAT

Colour code	Can size Litres	Article Number	Unit/ pack	Prices
4001 Clear	0.75	138 00 001	4	
	2.50	138 00 002	2	
	25.00	138 00 003	1	

MANUAL PROCESSING

Finished surface in 1 day, 1 coat (top coat required)

1. Apply finish onto raw wood approx. 160 – 200 ml/m². Apply to all sides if possible.
2. Drying time approx. 12 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time. Ensure good ventilation while drying.
3. Apply a top coat within 3 months with One Coat Only HS^{Plus}, Country Colour, Natural Oil Woodstain, Opaque Gloss Wood Stain or UV-Protection-Oil.

Use biocides carefully. Always read the label and product information before use!

RECOMMENDED USE

Osmo WR Base Coat serves as protection of dimensionally stable, limitedly dimensionally stable or dimensionally unstable wood in outdoor areas, without structural loads and without contact to the ground (e.g. windows, shutters, doors, pergolas, cladding, garden furniture etc.) against insects, rot and blue stain acc. DIN 68800, part 3 (German Industrial Norm).

ADVANTAGES

- > Highly water-repellent, reduces swelling and shrinkage of wood
- > Preventative against plant and animal wood pests such as rot, blue stain and insects
- > Ideal as a base coat for oil-based finishes

TOOLS



DECKING CLEANER



30-100m²/1l

1 COAT

Colour code	Can size Litres	Article Number	Unit/ pack	Prices
8025 Clear	1.00	139 00 150	6	
	5.00	139 00 151	1	

MANUAL PROCESSING

1. Remove debris from wood surface with a sturdy broom/hand brush.
2. Pour Osmo Decking Cleaner into mop water. (Concentration depends on the amount of contamination 1:25 up to max. 1:1.)
3. Clean wood along the wood grain with a scrub brush. (For machine processing on decking, it is recommendable to use Osmo Decking and Flooring Cleaning Machine.)
4. Coverage depends on the degree of contamination, 1 L = 30 – 100 m²
5. After cleaning, rinse with clear water.

RECOMMENDED USE

Osmo Decking Cleaner is especially suited for cleaning all timber decking in outdoor areas as well as for privacy screens, fencing and garden furniture made of wood.

ADVANTAGES

- > Highly effective concentrate
- > Deep cleaning power
- > High coverage
- > Easy to use

POLYMER COMPOSITE CLEANER



10-50m²/1l

1 COAT

Colour code	Can size Litres	Article Number	Unit/ pack	Prices
8021 Clear	1.00	139 00 078	6	
	5.00	139 00 079	1	

MANUAL PROCESSING

1. Remove debris.
2. Dilute the concentrate 1:20 up to 1:10 with water. Apply to desired areas, loosen deposits with a scrubber and rinse with clear water. A trial application is absolutely necessary! Do not use undiluted! Always use on the complete area!
3. Reaction time: approx. 10 minutes, afterwards rinse thoroughly with water.
4. Coverage: concentrate, depending on the amount of contamination, diluted with water 1 L = 10 - 50 m².

RECOMMENDED USE

Osmo Polymer Composite Cleaner was especially developed to clean WPC and BPC decking and other waterproof surfaces in outdoor areas, such as garden furniture and fencing made of synthetic materials.

ADVANTAGES

- > Highly effective concentrate
- > Deeply cleaning power
- > High coverage
- > Easy to use

WOOD REVIVER POWER-GEL



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
6609 Clear	0.50	139 00 115	6	
	2.50	129 00 075	1	

RECOMMENDED USE

Osmo Wood Reviver Power-Gel is highly recommended for timber decking, cladding, garden furniture and similar surfaces.

ADVANTAGES

- > Restores the natural character of unweathered wood; the fresh, warm wood tone reappears.
- > Odourless and biodegradable.

MANUAL PROCESSING

Finished surface in 1 day

1. Remove debris.
2. Dampen surface with water.
3. Apply approx. 100 ml/m² on greyed wood.
4. After reaction time, min. 20 minutes, rub surface with a hard bristle or scrub brush and a lot of water. Surface can be recoated after drying for approx. 48 hours (normal climatic conditions, 23 °C/50 % rel. humidity). Lower temperatures and/or higher humidity can increase drying time.
5. Protect the surface with an Osmo wood finish for exterior use.

GARD CLEAN



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
6606 Clear	1.00	133 00 021	6	
	5.00	133 00 027	1	

RECOMMENDED USE

Osmo Gard Clean is ideal for the removal of green growth on garden furniture made of wood or synthetic materials. Also applicable for cladding made of stone (also gravestones), synthetic materials (check colourfastness), concrete, pebble-dashed concrete, Eternit etc.

ADVANTAGES

- > Cleans green growth and other natural dirt and stains thoroughly, quickly, gently and automatically
- > Low odour and prevents new growth

MANUAL PROCESSING

1. Remove debris.
2. Depending on the degree of growth – pure or diluted with maximal 10 parts water – apply evenly with a paintbrush, scrub brush, watering can or pump sprayer on the dry surface. Do not rinse with water.
3. Reaction time: green growth disappears on its own after a period of 24 hours. (If some growth is present, repeat the process.)
4. Coverage: depending on degree of growth 1 L = 30 – 100 m².
5. Before reapplying wood finish, rinse with water and allow to dry thoroughly.

Use biocides safely. Always read the label and product information before use!

SPRAY CLEANER



Colour code	Can size Litre	Article Number	Unit/ pack	Prices
8027 Clear	0,50	129 00 091	6	

RECOMMENDED USE

Osmo Spray Cleaner is especially suitable for cleaning and maintaining oiled wood surfaces and garden furniture in outdoor areas. It is particularly recommended for surfaces treated with Osmo Decking-Oils or Teak-Oil Spray.

ADVANTAGES

- > Highly effective cleaning
- > Cleans without damaging the surface
- > Preserves and restores the surface
- > Easy application
- > Suitable for household and commercial use
- > Suitable for all wood species

MANUAL PROCESSING

1. Remove debris.
2. Spray onto surface.
3. Clean the surface subsequently with a lint-free cotton cloth and rub dry.

Note: Product coverage depends significantly on the character of the wood. All information refers to smooth and planed/cut surfaces. Other surfaces, e.g. brushed or structured, may lead to reduced coverage. Results may vary depending on wood species and properties (e.g. surface). Therefore a trial application is recommended.



TOOLS & ACCESSORIES



Offer the complete package – our tools and accessories make work easier.



TOOLS & ACCESSORIES

TOOLS / ACCESSORIES



RESIN REMOVER SET
(Page 46)



EASY CLEAN
(Page 50)



EASY PADS
(Page 50)



MAINTENANCE KIT FOR FLOORS
(Page 43)



CLEANING KIT FOR FLOORS
(Page 49)



SPRAY-MOP
(Page 47)



FLOORXCENTER
(Page 47)



DECKING AND FLOORING CLEANING MACHINE
(Page 47)

TOOLS / ACCESSORIES



WOOD FILLER AND COMPLETE BOX (Page 46)



WOOD PUTTY (Page 46)



BRUSH CLEANER AND THINNER (Page 50)



STIRRING STICK (Page 50)



ROLLER AND BRUSH SET (Page 49)



FLOOR ROLLER SET (Page 48)



DECKING BRUSH SET (Page 49)



FLAT BRUSH (Page 50)



DOUBLE BLADE SCRAPER (Page 50)



PROFESSIONAL SCRAPER (Page 47)



FLOOR BRUSH WITH HANDLE (Page 48)



SYSTEM TELESCOPIC HANDLE (Page 48)



DECKING CLEANING BRUSH WITH HANDLE (Page 49)



DECKING BRUSH WITH HANDLE (Page 48)



PAD HOLDER WITH JOINT (Page 48)



HAND PAD HOLDER (Page 48)



TOOLS & ACCESSORIES



WOOD FILLER

Colour code	Can size Gram	Article Number	Unit/pack	Prices
7300 White	100	135 00 016	6	
7301 Beech	100	135 00 012	6	
7302 Pine	100	135 00 013	6	
7303 Mahogany	100	135 00 014	6	
7304 Oak	100	135 00 015	6	

RECOMMENDED USE

Osmo Wood Filler is suitable for patching small cracks, holes and joints in wood.



WOOD PUTTY

Colour code	Can size Litre	Article Number	Unit/pack	Prices
7350 Clear	5.00	151 00 024	1	

RECOMMENDED USE

Suitable for filling small cracks (< 2 mm) and small damages (e.g. screw holes) in wooden flooring and parquet. Can be used universally on all wood species. Not suitable for elastic constructions, e.g. plank or sprung floors as well as cork flooring.

ADVANTAGES

- > High filling power
- > Quick drying
- > Good sanding properties
- > Low odour



RESIN REMOVER SET

Product	Article Number	Unit/pack	Prices
Resin Remover Set	129 00 035	1	

SET CONTENTS

- > Resin Remover 0.1 L
- > 3 Touch-Up Matt/Satin
- > 3 cotton cloths
- > Scraper
- > Instructions

RECOMMENDED USE

Osmo Resin Remover Set is suitable for the removal of resin leakage, even on colour treated surfaces.

ADVANTAGES

- > Quick application
- > Guarantees a thorough removal of any surface deposits
- > No water needed

TOOLS



WOOD FILLER COMPLETE BOX

Product	Can size Gram	Article Number	Unit/pack	Prices
Display Box Wood Filler 30 x 100g	30 x 100	130 00 020	1	

ADVANTAGES

- > When dry, recoatable with any Osmo wood finish.

MANUAL PROCESSING

1. Before applying, stir well in a bucket so that any settlement is mixed in.
2. Mix in sanding dust, at best from the same type of wood with a grit 80-120, into thick paste (approx. 15 % weight increase by adding sanding dust).
3. Fill in flooring diagonally with a stainless steel double blade scraper and at the same time press wood putty firmly into joints. Repeat process if necessary.
4. After 30 – 60 minutes the dried paste can be sanded coarsely (grit P80) and afterwards finely sanded (grit P100 – 120) so that no wood putty is left on the surface of the parquet. In most cases, fine sanding with P100 – 120 is enough.
5. Treatment with all Osmo oil-wax finishing systems can be carried out afterwards.

Note: As wood putty mixture and processing strongly depends on the wood type and on the sanding dust, we absolutely recommend carrying out a trial application! Do not fill joints in sprung or plank flooring!

MANUAL PROCESSING

1. Remove heavy resin leakage with a dull scraper without damaging the finish
2. Dampen the enclosed cotton cloth with Osmo Resin Remover and rub away the thin resin film. Allow for good ventilation.
3. Rub the matt areas with the cotton cloth that is dampened with Osmo Touch-Up Matt/Satin and allow the wood stain to dry for approx. 10 – 12 hours. Allow for good ventilation.

FLOORXCENTER



Product	Article Number	Unit/pack	Prices
FloorXcenter	140 00 240	1	
FloorXcenter White pad	140 00 241	5	
FloorXcenter Red pad	140 00 242	5	
FloorXcenter Green pad	140 00 259	5	
FloorXcenter Micro-fibre pad	140 00 243	5	
FloorXcenter Brush set	140 00 244	1	

APPLICATION

1. White pad – loosens common household contaminations (ideal for colouring flooring and re-oiling with Polyx®-Oil).
2. Red pad – removes especially tough deposits, also suitable for intermediate sanding.
3. Green pad – cleans intensively and rubs in 2-component products.
4. Microfibre pad – picks dirt up.
5. Brush ring – cleans structured surfaces.

RECOMMENDED USE

Osmo FloorXcenter is suitable for the cleaning, initial treatment and restoration or maintenance of oiled wooden flooring as well as colouring. It is solely intended for use inside buildings.

ADVANTAGES

- > Quick and efficient work
- > Easy work
- > Various pads for different applications

DECKING AND FLOORING CLEANING MACHINE



Product	Article Number	Unit/pack	Prices
Decking and Flooring Cleaner	140 00 250	1	
Replacement brushes - Universal - Interior	140 00 252	1	
Edge brush - Universal - Interior	140 00 254	1	
Edge brush - Abrasive - Exterior	140 00 256	1	

ADVANTAGES

- > Suitable for cleaning in indoor and outdoor areas
- > Intensively cleans and degreys timber decking
- > Deep cleans wooden flooring
- > Especially effective thanks to the counter-rotating brushes
- > Loosens and absorbs dirt in one clean step
- > Wastewater is collected in a tank
- > Available for rent from a local Osmo dealer

RECOMMENDED USE

Osmo Decking and Flooring Cleaning Machine is suitable for loosening and absorbing deposits in indoor and outdoor areas in one step. Ideal for the intensive cleaning and degreying of timber decking and for the deep cleaning of wooden flooring.

SPRAY-MOP



Product	Can size Litre	Article Number	Unit/pack	Prices
Spray-Mop Set		129 00 080	1	
Spray-Fix cartridge	0.75	129 00 081	6	
Spray-Fix refill tank	5.00	129 00 082	1	
Active Fibre Mop		129 00 083	1	

SET CONTENTS

- > Spray-Mop
- > Spray-Fix cartridge 0.75 l
- > Active Fibre Mop

RECOMMENDED USE

Osmo Spray-Mop is suitable for the fast damp cleaning of smooth wooden, tiled and natural stone flooring.

ADVANTAGES

- > Quick and easy application
- > No mop water necessary
- > Active Fibre Mop is machine-washable



THE RIGHT TOOL FOR EVERY APPLICATION

Osmo tools follow an ingenious system which allows the Osmo System Telescopic Handle to be combined with various attachments. The Telescopic Handle can, for example, be connected with a floor brush, pad holder or even with the whole range of attachments out of the Cleaning Kit for Floors. Tools from Osmo are the optimal helpers for creating and maintaining high quality surfaces. They set new standards with high quality and innovative features, and thanks to Quick Connect technology, they are fast and easy to use.



SYSTEM TELESCOPIC HANDLE

Product	Article Number	Unit/pack	Prices
System Telescopic Handle	140 00 312	1	



FLOOR BRUSH WITH HANDLE

Product	Width millimetre	Article Number	Unit/pack	Prices
Floor Brush with handle	220	140 00 305	6	
	400	140 00 310	1	




FLOOR ROLLER SET

Product	Article Number	Unit/pack	Prices
Floor Roller Set	140 00 230	2	
Replacement Floor Rollers in Fresh Box	140 00 173	4	
Tray Inserts for Floor Roller Set	140 00 232	1	



PAD HOLDER WITH JOINT

Product	Article Number	Unit/pack	Prices
Pad holder with joint 105x235 mm	140 00 238	6	
Superpad rectangular white 120x250 mm	140 00 265	10	
Superpad rectangular red 120x250 mm	140 00 266	10	
Superpad rectangular green 120x250 mm	140 00 267	10	

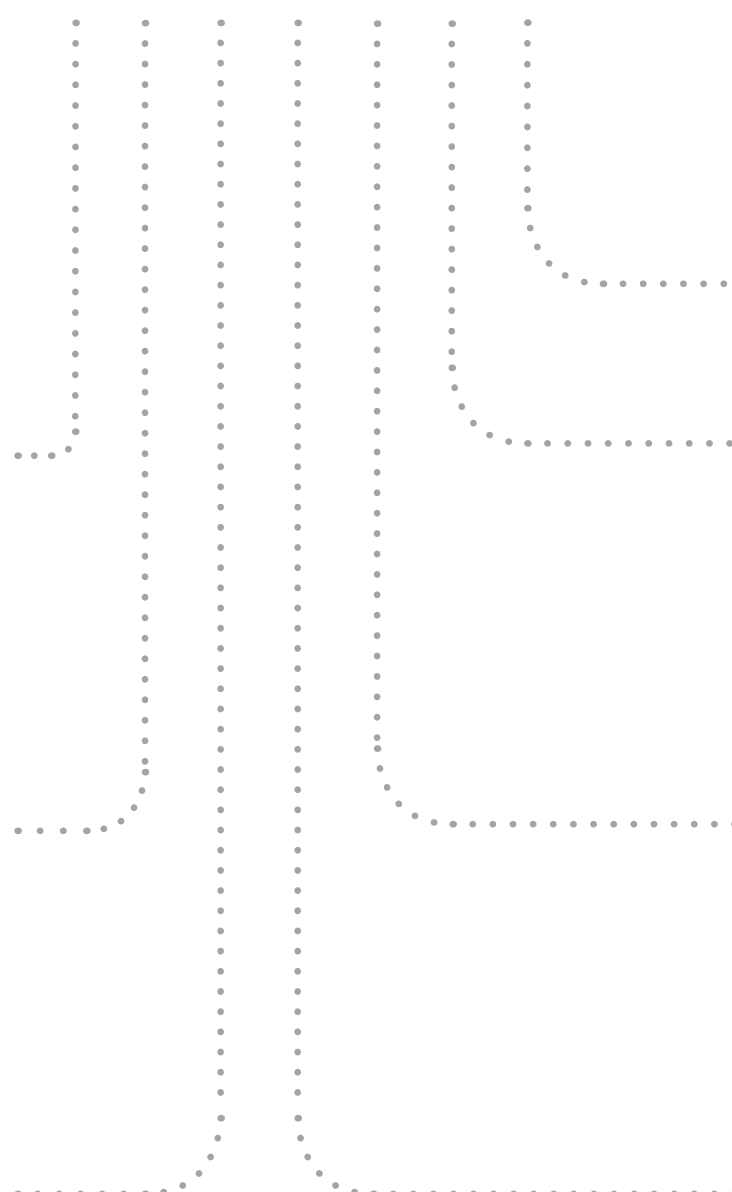



CLEANING KIT FOR FLOORS

Product	Article Number	Unit/pack	Prices
Osmo Cleaning Kit for Floors	140 00 262	4	
Dust-Mop	140 00 050	1	
Micro-Mop plush	140 00 055	1	
Active Fibre Cloth	140 00 060	1	

SET CONTENTS

- > Mop head plate with extra fixing points
- > Dust-Mop – for easy dusting
- > Micro-Mop Plush – for mopping with Osmo Wash and Care
- > Active Fibre Cloth – for floor restoration with Osmo Liquid Wax Cleaner

RECOMMENDED USE

Osmo Cleaning Kit for Floors is suitable for dusting and mopping as well as maintaining smooth wooden, synthetic, tiled and natural stone flooring.

ADVANTAGES

- > Perfectly matched products in one set
- > Together resulting in the optimal cleaning and maintenance aid
- > Mop head plate with extra fixing points



ROLLER AND BRUSH SET

Product	Article Number	Unit/pack	Prices
Roller and Brush Set	140 00 171	4	
Tray inserts for Roller and Brush Set	140 00 172	1	
Replacement Roller	140 00 182	6	

DECKING CLEANING BRUSH WITH HANDLE



Product	Article Number	Unit/pack	Prices
Decking Cleaning Brush with handle	140 00 237	6	

DECKING BRUSH WITH HANDLE



Product	Width millimetre	Article Number	Unit/pack	Prices
Decking Brush with handle	150	140 00 300	6	

DECKING BRUSH SET



Product	Article Number	Unit/pack	Prices
Decking Brush Set	140 00 233	4	
Tray inserts for Decking Brush Set	140 00 235	1	



TOOLS & ACCESSORIES



FLAT BRUSH

Product	Width mm	Article Number	Unit/pack	Prices
Flat Brush	25	140 00 001	12	
	50	140 00 002	12	
	60	140 00 003	12	
	100	140 00 004	12	



HAND PAD HOLDER

Product	Article Number	Unit/pack	Prices
Hand Pad Holder 85x135mm	140 00 260	6	
Superpad rectangular white 95x155 mm	140 00 268	10	
Superpad rectangular red 95x155 mm	140 00 269	10	
Superpad rectangular green 95x155 mm	140 00 270	10	
Oil Finish Applicator Fleece 95x155 mm	140 00 271	15	



DOUBLE BLADE SCRAPER

Product	Width mm	Article Number	Unit/pack	Prices
Double Blade Scraper	270	140 00 187	1	



PROFESSIONAL SCRAPER

Product	Width mm	Article Number	Unit/pack	Prices
Professional Scraper	500	140 00 100	1	



EASY CLEAN

Product	Article Number	Unit/pack	Prices
Easy Clean	140 00 165	15	



EASY PADS

Product	Article Number	Unit/pack	Prices
Easy Pads	140 00 160	5	

RECOMMENDED USE

Osmo Easy Clean is ideal for quick hand cleaning and care. Removes oil and wax as well as bitumen, tar, ink, glue and so on effortlessly.

ADVANTAGES

- > No water or soap needed

RECOMMENDED USE

Osmo Easy Pads are specialized cleaning and maintenance cloths for oiled/waxed as well as lacquered wood surfaces. Also suitable for the even application of Osmo Wood Wax Finish.

ADVANTAGES

- > Simple and convenient application
- > Ideal for maintaining and polishing
- > Lint-free



BRUSH CLEANER AND THINNER

Colour code	Can size Litre	Article Number	Unit/pack	Prices
8000 Clear	1.00	139 00 001	6	
	25.00	139 00 006	1	



STIRRING STICK

Product	Article Number	Unit/pack	Prices
Stirring Stick	140 00 006	10	

CAN I CHANGE THE COLOUR OF MY WOODEN FLOORING?

Yes, with Osmo Polyx®-Oil Tints and Wood Wax Finish. Apply the finish with a stiff floor brush, roller or a paintbrush. Ensure that the coat is applied thinly. Allow the floor to dry overnight, ensure that there is good ventilation and then apply one thin coat of Polyx®-Oil to finish.

HOW DO I PREPARE THE SURFACE OF MY WOODEN FLOOR?

The surface should be sanded along the wood grain and finished with grit P 120 –150 sandpaper. Care should be taken when removing all scratch marks.

WHAT DO I DO IF PART OF MY FLOOR IS DAMAGED?

Unlike many of the traditional lacquers, damaged areas on floors treated with Osmo products can be sanded and recoated with the same products without leaving any visible transitions.

DO I NEED TO SAND BETWEEN THE COATS?

You should always assess the surface before applying the second coat, as sanding between coats may be necessary.

IS THERE ANYTHING I SHOULD PAY ATTENTION TO WHEN TREATING HARDWOOD FLOORS?

Due to the density and the content of wood extractives of some hardwoods, such as Jatoba and Merbau, they can absorb little product. Therefore we recommend treating such woods with Wood Wax Finish Clear Extra Thin or Osmo Polyx®-Oil 2K Pure, which penetrate deeply into the pores.

WHAT HAPPENS IF TOO MUCH PRODUCT IS APPLIED?

If you have applied too much Polyx®-Oil, the drying time will be extended considerably. If this happens, provide additional ventilation by opening windows and doors so that the product can dry naturally through oxidation. If damage occurs to the surface as a result, repair the surface as described above.

WHAT HAPPENS IF TOO LITTLE PRODUCT IS APPLIED?

If you have applied too little of the product, water spots may appear, the wood may dry out or appear dull. In such cases, please apply another thin coat of Osmo Polyx®-Oil.

CAN THE COLOUR TONES OF OSMO FINISHES BE MIXED WITH EACH OTHER?

Yes. The colour tones of the respective product ranges can be mixed in any ratio. Osmo Wood Wax Finishes can be mixed with each other to allow for a larger colour range.

HOW LONG DOES IT TAKE FOR THE SURFACE TO DRY?

Most Osmo products dry within 8 –10 hours. The surface dries through oxidation and absorption. Please ensure that there is sufficient ventilation for drying purposes.

WHEN IS THE FLOOR ACCESSIBLE AGAIN?

Generally flooring is accessible one day after the final coat is applied. However, you must ensure that the final coat is dry to

the touch. The surface will take 14 days to cure completely. As a result, rugs should first be placed on the surface after 2 – 3 weeks.

DOES THE FLOOR NEED POLISHING ONCE THE TOP COAT OF OSMO POLYX®-OIL HAS BEEN APPLIED?

No, at this stage no further floor treatment is necessary. However, the surface can be buffed with a single disc machine (white pad) once completely dry. If a higher level of gloss is desired, the floor can be treated after one day at the earliest with Osmo Liquid Wax Cleaner and then polished.

HOW DO I MAINTAIN MY FLOOR?

This all depends on how much it is used. For regular, gentle cleaning, we recommend adding Osmo Wash and Care to mop water. Osmo Cleaning Kit for Floors and Spray-Mop have proven to be invaluable tools for floor maintenance. If the floor starts to look dull and lifeless, simply restore it by using Osmo Liquid Wax Cleaner. This can be done in small areas, e.g. near doors or on high traffic areas, without needing to restore the whole floor area as our products do not leave any visible transitions. If the signs of wear are more substantial, the floor should be recoated with Osmo Polyx®-Oil.

WHY DOES THE FINISH LOOK DIFFERENTLY ON THE CAN?

Depending on the wood species they are applied on, finishes can appear differently in colour tone. This tone does not have to match the small sticker on the can. We recommend applying a small trial application on a similar piece of wood to test for the desired results.

WHAT SURFACE PROPERTIES ARE BEST FOR APPLYING FINISH TO WOOD?

The surface must be clean, dry (max. 20 % moisture content) and frost-free.

WHAT DOES WOOD TREATED WITH OSMO PRODUCTS SMELL LIKE?

After drying, your wood flooring will have a slight smell of wood and natural oils and waxes. As a solvent, we use deodorized white spirit, which is less harmful to the health than so-called "Eco" solvents, such as citrus oils. The solvent dissipates 100% after drying and curing.

DO OSMO PRODUCTS CONTAIN HARMFUL SUBSTANCES?

Osmo products are based on carefully purified natural oils and waxes. When dry, most of these surfaces are safe for humans, animals and plants (suitable for children's toys according to EN 71.3 and resistant to saliva and perspiration according to DIN 53160).

NOTE ON THE USE OF OIL BASED WOOD FINISHES

Cloths and material soaked with the liquid product should either be washed out immediately or stored in a closed airtight metal container (Danger of self-ignition!).

OUR PRODUCTS

> TIMBER CLADDING

Cladding profiles
Shingles
Framing wood

> FLOORING

Solid wood flooring
Creativ-Flooring

> WOOD FINISHES

For the interior and exterior
Wood protection and care

> INTERIOR WOOD

Solid wood profiles
Framing wood
Planed timber

> EDGE-GLUED PANELS

Solid wood panels
Work surfaces
Furniture doors

> MOULDINGS

Skirting boards
Functional mouldings
Decorative mouldings

> DECKING

Wood and BPC
Decking tiles

> SCREENS

Wood and BPC
Fences

Osmo Holz und Color GmbH & Co. KG

Affhüppen Esch 12
D-48231 Warendorf

PO Box 110161
D-48203 Warendorf

Telephone +49 (0)2581/922-100
Telefax +49 (0)2581/922-200

www.osmo.de/en
info@osmo.de

Your local Osmo dealer:

